





Catalogue contain-
ing useful informa-
tion in connection
with the use

of

SILICA MAGNESIA
CHROME AND
FIRE CLAY BRICK
and various
REFRACTORIES



as furnished by the
Harbison-Walker
Refractories Co.
Pittsburgh, Pa.

BIRMINGHAM WORKS

WE have recently erected at Wylam, near Birmingham, Ala., a plant for the manufacture of the highest grade silica and fire clay brick, where a full line of standard shapes is carried in stock.

PLANTS IN

Pennnsylvania, Ohio, Indiana,
Alabama and Kentucky.

SALES OFFICES AT

Pittsburgh, Chicago, Philadelphia, New
York and Birmingham.

TOTAL DAILY CAPACITY OF ALL WORKS
1,200,000 BRICK

©CL A303133

FIRE BRICK DEPARTMENT

GOOD material is the factor of supreme importance in all manufacturing business. During the growth and expansion of the fire brick business from small beginnings to the present output — corresponding to the growth and demands of the iron and steel industries — it has been the aim of this Company to maintain the lead in supplying all demands for high grade fire brick and refractory material. To this end, all clay deposits, seemingly worthy of investigation, have been core drilled, the best experts employed and record maps placed on file, enabling the Company to open mines in the irregular formations of fire clay with exact knowledge of what would be found. This work has been going on systematically for over thirty years. The results, with the association of a few of the most experienced and successful brick manufacturers, enable us to offer the following unrivaled list of well known brands of fire brick. Some of the brands are specially fitted for special work, as the "BENEZET" for blast furnace linings. Some are similar in character to others, but owing to location of works one brand may obtain a more favorable freight rate in a given case. Correspondence or an interview will determine, according to circumstances, which is the most suitable brand to use. With a wide range of

records on hand, the broadest experience in the business, and the good will of over seven thousand patrons to maintain, it is reasonable for customers to assume that they will get reliable advice and careful attention to orders, however large or small.

The brands included carry the world's record for output of metal per furnace lining, blast furnace stove brick that neither disintegrate nor become vitrified with the severe changes of temperature and blast that occur in furnace stoves incident to conditions connected therewith; the best of brick for cupolas, rotary cement kilns, lime kilns, open hearth steel furnaces, copper smelting, boiler settings, continuous glass furnaces and general purposes where high temperatures are in use.

The brick intended for different parts of a blast furnace lining are branded "HEARTH & BOSH," "INWALL" and "TOP" to prevent the mason from making mistakes. The records held by these brands are the result of careful observation over a long period and selection from the best clays. Our Ganister rock used in making Silica brick is selected from decidedly the finest deposits of this rock to be found anywhere. Our silica brands hold the best continuous records in open hearth steel, copper and continuous glass furnaces; also in longitudinal, by-product and beehive coke ovens.

STANDARD SHAPES—FIRE CLAY

Shapes	Page	Brands	Shapes	Page	Brands
9" Straight	26	Benezet	No. 1 Arch	26	Hearth & Bosh
	26	Hearth & Bosh			Woodland
	26	Benezet		26	Top Woodland
	26	Inwall Benezet		26	H.-W. Special
	26	Top Benezet		26	Tyrone
	26	Woodland	No. 2 Arch	27	Benezet
	26	Hearth & Bosh		27	Hearth & Bosh
		Woodland			Benezet
	26	Inwall Woodland		27	Top Benezet
	26	Top Woodland		27	Woodland
	26	H.-W. Special		27	Hearth & Bosh
	26	Tyrone			Woodland
	26	C.-Tyrone		27	Top Woodland
	26	Widemire		27	H.-W. Special
No. 1 Key	29	Benezet		27	Tyrone
	29	Hearth & Bosh	Bung Arch	27	Woodland
		Benezet			
	29	Inwall Benezet	No. 1 Split	27	Benezet
	29	Top Benezet		27	Woodland
	29	Woodland		27	H.-W. Special
	29	Hearth & Bosh		27	Tyrone
		Woodland	No. 2 Split	27	Benezet
	29	Inwall Woodland		27	Woodland
	29	Top Woodland	No. 1 Wedge	28	Benezet
No. 2 Key	29	H.-W. Special		28	Woodland
	29	Tyrone		28	Tyrone
	29	C.-Tyrone		28	H.-W. Special
				28	
	29	Benezet	No. 2 Wedge	28	Benezet
	29	Hearth & Bosh		28	Woodland
		Benezet		28	H.-W. Special
	29	Top Benezet		28	Tyrone
	29	Woodland	No. 3 Wedge	28	Benezet
	29	Hearth & Bosh		28	Woodland
		Woodland			
No. 3 Key	29	Inwall Woodland			
	29	Top Woodland	No. 1 Jamb	29	Benezet
	29	H.-W. Special		29	Woodland
	29	Tyrone	No. 2 Side Skew	30	Benezet
	29	C.-Tyrone		30	Woodland
No. 4 Key	29	Woodland	No. 3 Neck	30	Woodland
	29	Woodland	Featheredge	27	Woodland
No. 1 Arch	26	Benezet			
	26	Hearth & Bosh	No. 1 Circle	31	Benezet
		Benezet		31	Woodland
	26	Top Benezet			
	26	Woodland			

STANDARD SHAPES—FIRE CLAY
CONTINUED

Shapes	Page	Brands	Shapes	Page	Brands
No. 2 Circle	31	Benezet	9 x 6" Straight	39	Top Benezet
	31	Woodland		39	Hearth & Bosh
No. 3 Circle	31	Woodland			Woodland
No. 5 Circle	31	Woodland		39	Inwall Woodland
Soap	26	Benezet		39	Top Woodland
	26	Woodland	9 x 6" Key	39	Hearth & Bosh
	26	Tyrone			Benezet
Checker	26	Woodland		39	Inwall Benezet
Large 9"	26	Benezet		39	Top Benezet
	26	Woodland		39	Hearth & Bosh
Small 9"	26	Benezet			Woodland
	26	Woodland		39	Inwall Woodland
No. 1 Cupola	31	Woodland		39	Top Woodland
No. 2 Cupola	31	Woodland	Liner Brick	40	{ Coke—H.-W. Co. Clay
No. 3 Cupola	32	Woodland	Bottom Tile	40	
No. 4 Cupola	32	Woodland	Trunnel	40	H.-W. Co. Clay
Siemens Steel	100	Woodland	Bridge Block	32	Woodland
Furnace Blocks			Stock Hole	32	Woodland
Our Plan	102	Woodland	Regenerator	44	Inwall Benezet
Siemens Blocks			Tile	44	Tyrone
13½" Straight	38	Hearth & Bosh	101A Special	33	Woodland
		Benezet	Cover		
	38	Inwall Benezet	102A Special	33	Woodland
	38	Top Benezet	Cover		
	38	Woodland	103A Special	33	Woodland
	38	Hearth & Bosh	Cover		
		Woodland	104A Special	33	Woodland
	38	Inwall Woodland	Cover		
	38	Top Woodland	Bevel Cover	43	Woodland
13½" No. 2 Key	38	Hearth & Bosh	Square Cover	43	Woodland
		Benezet	Arch Cover	43	Woodland
	38	Inwall Benezet			
	38	Top Benezet	Hearth Block	61	Hearth & Bosh
	38	Hearth & Bosh		61	Benezet
		Woodland			Hearth & Bosh
	38	Inwall Woodland			Woodland
	38	Top Woodland	No. 66	45	H.-W. Special
13½" No. 4 Key	38	Hearth & Bosh	No. 72	45	H.-W. Special
		Benezet	No. 78	45	H.-W. Special
	38	Top Benezet	No. 84	45	H.-W. Special
	38	Hearth & Bosh	No. 90	45	H.-W. Special
		Woodland	No. 96	46	H.-W. Special
	38	Inwall Woodland	No. 12	46	H.-W. Special
	38	Top Woodland	No. 13	46	H.-W. Special
9x6" Straight	39	Hearth & Bosh	No. 14	46	H.-W. Special
		Benezet			
	39	Inwall Benezet			

STANDARD SHAPES—SILICA

Shapes	Page	Brands	Shapes	Page	Brands
9" Straight	26	Star	No. 4 Key	29	XX Sand
	26	XX Sand		29	XX Silica
	26	XX Silica			
Large 9"	26	Star	Key Wedge	28	Star
	26	XX Sand	No. 1 Jamb	29	Star
	26	XX Silica	No. 2 Skew	30	Star
Small 9"	26	Star	No. 3 Neck	30	Star
	26	XX Sand	Featheredge	27	Star
	26	XX Silica			
Soap	26	Star	12 x 6 x 2½" Straight	35	Star
	26	XX Sand			
	26	XX Silica	12 x 9 x 2½" Straight	36	Star
No. 1 Arch	26	Star	Soap		
	26	XX Sand			
	26	XX Silica	12 x 2½" No. 1 Wedge	35	Star
No. 2 Arch	27	Star			
	27	XX Sand	12 x 2½" No. 1 Wedge	36	Star
	27	XX Silica	Soap		
No. 3 Arch	27	Star			
No. 1 Split	27	Star	12 x 2½" No. 2 Wedge	36	Star
	27	XX Sand			
	27	XX Silica	12 x 2½" No. 2 Wedge	36	Star
No. 2 Split	27	Star	Soap		
	27	XX Sand			
	27	XX Silica	12 x 6 x 3" Straight	35	Star
No. 1 Wedge	28	Star			
	28	XX Sand	12 x 3 x 3" Straight	34	Star
	28	XX Silica	Soap		
No. 2 Wedge	28	Star			
	28	XX Sand	12 x 9 x 3" Straight	35	Star
	28	XX Silica	Soap		
No. 3 Wedge	28	Star			
	28	XX Sand	12 x 3" No. 1 Wedge	34	Star
	28	XX Silica			
Large 9" No. 1 Wedge	28	Star	12 x 3" No. 1 Wedge	34	Star
Large 9" No. 2 Wedge	28	Star	Soap		
No. 1 Key	29	Star			
	29	XX Sand	12 x 3" No. 2 Wedge	34	Star
	29	XX Silica			
No. 2 Key	29	Star	12 x 3" No. 2 Wedge	34	Star
	29	XX Sand	Soap		
	29	XX Silica			
No. 3 Key	29	Star	13½" Straight	35	Star
	29	XX Sand			
	29	XX Silica	13½" Binder	35	Star
			Siemens Steel Fur-	100	Star
			nace Blocks		
			Coke Oven Crown	40	XX Silica

OTHER SHAPES MADE TO ORDER

EAST CHICAGO WORKS

WE have erected at East Chicago a modern plant for the manufacture of first quality silica brick.

The location was selected especially with regard to the trade in Indiana, Illinois, Michigan, Wisconsin, Missouri, Colorado and other western points.

New features have been successfully introduced in the works, placing this plant decidedly in advance of any silica brick works heretofore erected.

The Ganister rock used in "W. STAR," the East Chicago brand, comes from the well-known Wisconsin deposits. The quarries were selected after careful prospecting of the entire territory and numerous tests of brick made from rock of various localities.

"W. STAR" in every way is a high grade silica brick for open hearth furnaces, glass furnaces or for any purpose where the best silica brick are required.

For standard shapes, see the following page.

STANDARD SHAPES—W. STAR

EAST CHICAGO WORKS

Shapes	Page	Brands	Shapes	Page	Brands
9" Straight	26	W. Star	12 x 9 x 2½" Straight Soap	36	W. Star
Large 9"	26	W. Star	12 x 2½" No. 1 Wedge	35	W. Star
Small 9"	26	W. Star	12 x 2½" No. 1 Wedge Soap	36	W. Star
Soap	26	W. Star	12 x 2½" No. 2 Wedge	36	W. Star
No. 1 Arch	26	W. Star	12 x 2½" No. 2 Wedge Soap	36	W. Star
No. 2 Arch	27	W. Star	12 x 6 x 3" Straight	35	W. Star
No. 3 Arch	27	W. Star	12 x 3 x 3" Straight Soap	34	W. Star
No. 1 Split	27	W. Star	12 x 9 x 3" Straight Soap	35	W. Star
No. 2 Split	27	W. Star	12 x 3" No. 1 Wedge	34	W. Star
No. 1 Wedge	28	W. Star	12 x 3" No. 1 Wedge Soap	34	W. Star
No. 2 Wedge	28	W. Star	12 x 3" No. 2 Wedge	34	W. Star
No. 3 Wedge	28	W. Star	12 x 3" No. 2 Wedge Soap	34	W. Star
No. 1 Key	29	W. Star	12" No. 1 Arch	36	W. Star
No. 2 Key	29	W. Star	12" No. 2 Arch	36	W. Star
No. 3 Key	29	W. Star	12" No. 1 Key	34	W. Star
No. 2 Skew	30	W. Star	12" No. 2 Key	34	W. Star
No. 3 Neck	30	W. Star	13½" Straight	35	W. Star
Featheredge	27	W. Star	13½" Binder	35	W. Star
No. 1 Jamb	29	W. Star			
12 x 6 x 2½" Straight	35	W. Star			

OTHER SHAPES MADE TO ORDER



MAGNESIA AND CHROME DEPARTMENT

IN this department we manufacture two brands of "MAGNESIA" brick for use in basic open hearth steel furnaces or other places where basic material is required, and one brand of "CHROME" brick specially adapted for use in basic open hearth steel furnaces or other places where basic material is required.

All our "MAGNESIA" and "CHROME" brick are branded "H.-W. R. Co."

DEAD-BURNED OR GRAIN MAGNESITE

THE first magnesite brought to the United States was a shipment of 800 tons, bought in Europe in 1885. The first basic steel made in the United States was manufactured in 1886. The use of magnesite has increased progressively with the increased production of basic steel.

Our magnesite is the standard quality and is prepared in the most careful manner, material shipped being carefully manufactured and selected. Owing to the severe rejections in the quarry and the shrinkage in weight in calcining, it is necessary to quarry five tons of rock for every ton of magnesite shipped. That which is accepted is hand-picked, absolutely dead-burned, and contains the correct proportion of fluxing constituents to make it frit or set at the proper temperature in the bottoms of BASIC OPEN HEARTH STEEL FURNACES. Its low silica and lime contents, careful selection, thorough burning and careful hand-picking make it the most uniform, satisfactory and economical, and in every way the best magnesite on the market.

The principal use of magnesite is for forming bottoms in BASIC OPEN HEARTH STEEL FURNACES. A more limited use of magnesite is to make bottoms in MECHANICAL PUDDLING FURNACES, HEATING FURNACES, and tamped in the side walls of COPPER REVERBERATORIES to take the splash of the metal.

CHROME ORE

SESQUIOXIDE of Chromium, known commercially as Chrome Ore, is exceedingly refractory, dense and neutral; it is neither acid, basic, reducing nor oxidizing.

It is used principally in BASIC OPEN HEARTH FURNACES, in such places as along the back walls of STATIONARY and TILTING FURNACES; on the floors of the ports, and as a protection to the silica brick in the ports and furnace blocks. Chrome Ore is generally useful where chemical action and high temperature combined are to be resisted.

We can furnish a Chrome Ore running especially low in silica and containing from 38 to 42 per cent. of chromium sesquioxide, and a Chrome Ore running 50 per cent. chromium sesquioxide or over, shipping either in lump form or finely ground, as ordered.

MAGNESIA BRICK

WE use the highest quality selected magnesite in making Magnesia Brick. The utmost attention, care and experience are given to all the processes of manufacture and burning, and our Magnesia Brick are the standard of quality.

In BASIC OPEN HEARTH STEEL FURNACES a number of courses of magnesia brick are used in making the foundation for the bottom; the bottom being made of dead-burned magnesite. Side walls are built of magnesia brick to a height of about 15 inches above the bottom of the charging doors. They are used around the door jambs and tapping holes, and to face the furnace blocks as a protection to the silica brick. They are also being used to advantage in the bulkheads of the ports. Several companies report excellent results by putting in six or eight courses of magnesia brick as the top courses in the gas checkers.

In the construction of SOAKING PITS magnesia brick have replaced fire brick in the six or eight bottom courses, where they last a long time.

Magnesia brick are used along the slag line of METAL MIXERS instead of fire-clay brick.

In BILLET and BAR HEATING FURNACES running on producer or natural gas, magnesia brick are found to be an economy when used in the bottom and on the bridge wall. Sometimes bottoms are made of magnesite mixed with roll scale in the proportion of one ton of dead-burned magnesite to 600 or 800 pounds of roll scale.

Magnesia brick are being widely adopted by COPPER RE-VERBERATORIES; they are being used in the bottom, which is built as an inverted arch, and in the side walls and on the bridge wall to take the splash of the metal.

Many COPPER CONVERTERS are, next to the shell, lined with one course of magnesia brick laid in magnesite cement.

Special types of furnaces, such as SILVER SLIMES, DROSS and BULLION FURNACES, ELECTRICAL SMELTING, HEATING, WELDING and MELTING FURNACES; CALCIUM CARBIDE KILNS, etc., find the use of magnesia brick a solution of the problem of refractory linings.

Some manufacturers of Portland cement have found magnesia brick to last very well in the burning zone of ROTARY KILNS.

Magnesia brick should be laid in magnesite cement. They are very good conductors of heat, and where this heat conductivity would injure the plate work they should be backed up with some other of our high-grade material. They expand slightly at high temperatures. They are better conductors of electricity than porcelain at 2,000 degrees Fahrenheit or over; at low temperature their electrical conductivity is less than porcelain.

The best results are obtained from magnesia brick in furnaces where continuous heats are used. Great variation of temperature, exposure while hot to currents of cold air or to contact while hot with water or oil, will cause them to shatter and spawl.

Magnesia brick should not be subjected to excessive weight when hot.

CHROME BRICK

CHROME brick are very refractory, dense in structure, and neutral. They are practically infusible.

In BASIC OPEN HEARTH STEEL FURNACE construction they are used as a neutral course between the fire clay brick on the bottom plates and the magnesia brick forming the foundation for the hearth or furnace bottom. The floors of ports and the facing of port walls and backwalls of uptakes are built of chrome brick in many furnaces. Chrome brick are useful in making quick repairs in furnaces at working heat, as they are not affected by sudden changes of temperature.

In bottoms of SOAKING PITS six or eight courses of chrome brick replace fire clay brick with advantage.

Chrome brick are being used with good results along the slag line of COAL-FIRED HEATING FURNACES having cinder bottoms.

In COPPER SMELTING and REFINING PLANTS chrome brick are used in the bottom courses and around the tapping holes of BLAST FURNACES; in lining SETTLERS, especially on the slag matte line and around the tapping holes, and in lining CONVERTERS next to the shell. When chrome brick are put next to the shell they should be laid in magnesite cement instead of chrome ore, the former sticking well to ironwork.

LEAD SOFTENING and REFINING FURNACES and many types of SPECIAL FURNACES used in melting and smelting alloys, have adopted chrome brick in places where fire clay or other refractory brick are rapidly destroyed.

They have been used with success in several ROTARY CEMENT KILNS making Portland cement.

Chrome brick should be laid in finely ground chrome ore with the exception noted above. They expand slightly at high temperatures. They should not be subjected to excessive weight when hot. Chrome brick are practically unaffected by changes in temperature; at furnace heat they can come in contact with water without breaking or spawling.

STANDARD SHAPES—MAGNESIA

Shapes	Page of Illustration	Brand
Straight, Standard Size.....	52	H.-W. R. Co.
No. 1 Arch, Standard Size.....	52	H.-W. R. Co.
No. 2 Arch, Standard Size.....	52	H.-W. R. Co.
No. 3 Arch, Standard Size.....	52	H.-W. R. Co.
No. 1 Wedge, Standard Size.....	52	H.-W. R. Co.
No. 2 Wedge, Standard Size.....	53	H.-W. R. Co.
Soap, Standard Size.....	53	H.-W. R. Co.
No. 1 Split, Standard Size.....	53	H.-W. R. Co.
No. 2 Split, Standard Size.....	53	H.-W. R. Co.
No. 1 Key, Standard Size.....	53	H.-W. R. Co.
No. 2 Key, Standard Size.....	53	H.-W. R. Co.
No. 3 Key, Standard Size.....	53	H.-W. R. Co.
No. 4 Key, Standard Size.....	53	H.-W. R. Co.

STANDARD SHAPES—CHROME

Shapes	Page of Illustration	Brand
Straight.....	51	H.-W. R. Co.
No. 1 Wedge.....	51	H.-W. R. Co.
No. 2 Wedge.....	51	H.-W. R. Co.
No. 1 Key.....	51	H.-W. R. Co.
No. 2 Key.....	51	H.-W. R. Co.

Other shapes made to order.

All "CHROME" and "MAGNESIA" brick are branded "H.-W. R. Co."

THE PORTSMOUTH HARBISON-WALKER COMPANY

THE Portsmouth Harbison-Walker Company has large tracts of fine quality flint clay in southern Ohio and northern Kentucky. The plants of this company are favorably located for supplying the iron, steel and other industries in the territory lying west and south of Pittsburgh.

The following brands manufactured have been long recognized as standards in this district:

H. & W. Co. Hearth and Bosh

H. & W. Co. Inwall

H. & W. Co. Top

Kentucky Steel

Anglo-Saxon

R. Jenkins

First quality clay brick for blast furnaces, or where brick are required to withstand friction as well as high temperature.

H. & W. Co. High Grade

Franklin Crown

Malleable

Royal Star

First quality brick for high grade mill work, malleable iron works, steel works, hot blast stoves, boiler settings, locomotives, cupolas, glass works, and for all other purposes where brick are required to withstand high temperature.

H. & W. Co. No. 1

Sligo

Scioto Star

Webster

For hot blast stoves, steel works, boiler settings, cupolas, side walls of malleable furnaces, and other purposes where good second quality fire brick are required.

C-Franklin Crown

C-Sligo

C-Franklin Crown and C-Sligo are made especially for cupolas, cement and lime kilns.

H. & W. Co. Crown

H. & W. Co. Liner

Special brands for beehive coke ovens.

FOR STANDARD SHAPES, SEE PAGES 16 AND 17

THE PORTSMOUTH HARBISON-WALKER CO.

STANDARD SHAPES—FIRE CLAY

Shapes	Page	Brands	Shapes	Page	Brands
9" Straight	26	H. & W. Co. Hearth & Bosh			H. & W. Co. Hearth & Bosh
		H. & W. Co. Inwall			H. & W. Co. Top
		H. & W. Co. Top			H. & W. Co. High Grade
		H. & W. Co. High Grade	9" No. 2 Keys	29	H. & W. Co. No. 1
		H. & W. Co. No. 1	9" No. 1 Arch	26	Kentucky Steel
		Kentucky Steel	9" No. 2 Arch	27	R. Jenkins
		Anglo-Saxon			Franklin Crown
		R. Jenkins			Royal Star
		Franklin Crown			Malleable
		Royal Star			Scioto Star
		Malleable			Sligo
		Scioto Star			
		Sligo	Large 9"	26	
		Webster	Soaps	26	
		Special Silica			
9" No. 1 Keys 13½" Straights	29 38	H. & W. Co. Hearth & Bosh	No. 1 Splits	27	
		H. & W. Co. Inwall	No. 2 Splits	27	
		H. & W. Co. Top	No. 1 Wedge	28	H. & W. Co. High Grade
		H. & W. Co. High Grade	No. 2 Wedge	28	H. & W. Co. No. 1
		H. & W. Co. No. 1	No. 3 Key	29	Franklin Crown
		Kentucky Steel	No. 1 Jamb	29	Malleable
		Anglo-Saxon	Featheredge	27	Royal Star
		R. Jenkins	No. 2 Side Skew	30	Scioto Star
		Franklin Crown	No. 3 Neck	30	Sligo
		Royal Star	No. 1 Circle	31	
		Malleable	No. 2 Circle	31	
		Scioto Star	Small 9"	26	
		Sligo			

OTHER SHAPES MADE TO ORDER

THE PORTSMOUTH HARBISON-WALKER CO.

STANDARD SHAPES—FIRE CLAY—CONTINUED

Shapes	Page	Brands	Shapes	Page	Brands
No. 3 Wedge	28	<div> <div>H. & W. Co. High Grade</div> <div>H. & W. Co. No. 1</div> </div>	No. 1 Cupola	31	<div> <div>C.-Franklin Crown</div> <div>C.-Sligo</div> </div>
No. 4 Key	29		No. 2 Cupola	31	
No. 1 Skew	30		No. 3 Cupola	32	
No. 2 Neck	30		No. 4 Cupola	32	
No. 3 Circle	31	Franklin Crown	Hearth Blocks		
		Malleable	18 x 9 x 4½"	61	H. & W. Co. Hearth & Bosh
		Royal Star			
		Scioto Star			
13½" No. 2 Keys	38	Sligo	Liner	40	H.-W. Co. Liner
		H. & W. Co. Hearth & Bosh	Crown	40	H.-W. Co. Crown
		H. & W. Co. Inwall	Door Block	41	H.-W. Co.
		H. & W. Co. Top	5 x 4 x 4"		
		Franklin Crown	Trunnel	..	H.-W. Co.
		Kentucky Steel	12 x 12 x 3"	40	H.-W. Co.
		Anglo-Saxon	12 x 12 x 4"	40	H.-W. Co.
		R. Jenkins	2' 8" Fronts	..	H.-W. Co.
		H. & W. Co. Hearth & Bosh	3' 0" Fronts	..	H.-W. Co.
		H. & W. Co. Top			
13½" No. 4 Keys	38	Kentucky Steel	12 x 12 x 2"	..	H.-W. Co.
		R. Jenkins	15 x 12 x 2"	..	H.-W. Co.
			18 x 12 x 2"	..	H.-W. Co.
101 A-Special Cover	33	H. & W. Co. High Grade	No. 72	45	C-Franklin Crown
102 A-Special Cover	33		No. 78	45	
			No. 84	45	

OTHER SHAPES MADE TO ORDER

CLEARFIELD FIRE BRICK WORKS

THE trade of the Clearfield Fire Brick Company extends over a wide territory and the brands of brick made are favorably known for steel purposes, malleable iron works, blast furnaces, puddling furnaces, lime kilns, general mill purposes and other places where brick made from high grade clay are required. The clays used are all selected flint clays.

On the following page is a list of brands and standard shapes, giving page of illustration.

CLEARFIELD FIRE BRICK WORKS

STANDARD SHAPES—FIRE CLAY

Shapes	Page	Brands	Shapes	Page	Brands
9" Straight	26	Clearfield S	No. 3 Key	29	Clearfield S
	26	Hearth & Bosh	No. 4 Key	29	Clearfield S
	26	Clearfield	No. 1 Circle	31	Clearfield S
	26	Inwall Clearfield	No. 2 Circle	31	Clearfield S
	26	Top Clearfield	No. 1 End Skew	30	Clearfield S
Large 9"	26	Clearfield S	No. 2 Side Skew	30	Clearfield S
Small 9"	26	Clearfield S	No. 3 Edge Skew	30	Clearfield S
Soap	26	Clearfield S	No. 1 Neck	30	Clearfield S
Checker	26	Clearfield S	No. 2 Neck	30	Clearfield S
No. 1 Arch	26	Clearfield S	No. 3 Neck	30	Clearfield S
	26	Hearth & Bosh	No. 1 Jamb	29	Clearfield S
	26	Clearfield	No. 2 Jamb	..	Clearfield S. (No illustration)
	26	Top Clearfield	No. 3 Jamb	..	Clearfield S. (No illustration)
No. 2 Arch	27	Clearfield S	Featheredge	27	Clearfield S
	27	Hearth & Bosh			
	27	Clearfield			
	27	Top Clearfield			
No. 1 Split	27	Clearfield S	13½" Straight	38	Hearth & Bosh
No. 2 Split	27	Clearfield S		38	Clearfield
No. 1 Wedge	28	Clearfield S		38	Inwall Clearfield
No. 2 Wedge	28	Clearfield S			Top Clearfield
No. 3 Wedge	28	Clearfield S	13½" No. 2 Key	38	Hearth & Bosh
No. 1 Key	29	Clearfield S		38	Clearfield
	29	Hearth & Bosh		38	Inwall Clearfield
	29	Clearfield		38	Top Clearfield
	29	Inwall Clearfield	13½" No. 4 Key	38	Hearth & Bosh
	29	Top Clearfield		38	Clearfield
No. 2 Key	29	Clearfield S			Top Clearfield
	29	Hearth & Bosh			
	29	Clearfield			
	29	Top Clearfield	Velvetry Tile	00	Clearfield S. (No illustration)

OTHER SHAPES MADE TO ORDER

PHILIPSBURG FIRE BRICK WORKS

The Philipsburg Fire Brick Works make the following brands from choice Clearfield County flint clays:

"WIGTON STEEL" which is recognized as a standard brick for general mill work; it is also widely used in pottery kilns, etc.

"HEARTH & BOSH WIGTON," "INWALL WIGTON," "TOP WIGTON" which have long been standard brands for blast furnace linings.

STANDARD SHAPES—FIRE CLAY

Shapes	Page	Brands	Shapes	Page	Brands
9" Straight	26	Wigton Steel	No. 1 Jamb	29	Wigton Steel
	26	Hearth & Bosh	No. 2 Side Skew	30	Wigton Steel
		Wigton	No. 2 Neck	30	Wigton Steel
	26	Inwall Wigton	No. 3 Neck	30	Wigton Steel
	26	Top Wigton			
Large 9"	26	Wigton Steel			
Small 9"	26	Wigton Steel			
Soap	26	Wigton Steel	Boiler Tile { 12x12x2"	..	(No illustration)
No. 1 Arch	26	Wigton Steel	{ 15x12x2"	..	(No illustration)
No. 2 Arch	27	Wigton Steel	{ 18x12x2"	..	(No illustration)
No. 1 Split	27	Wigton Steel	Bung Arch	27	Wigton Steel
No. 2 Split	27	Wigton Steel	Featheredge	27	Wigton Steel
No. 1 Wedge	28	Wigton Steel	Flatback Arch	33	Wigton Steel
No. 2 Wedge	28	Wigton Steel	Flatback	33	Wigton Steel
No. 3 Wedge	28	Wigton Steel	Straight		
No. 1 Key	29	Wigton Steel	13½" Straight	38	Hearth & Bosh
	29	Hearth & Bosh		38	Wigton
		Wigton		38	Inwall Wigton
	29	Inwall Wigton		38	Top Wigton
	29	Top Wigton	13½" No. 2 Key	38	Wigton Steel
No. 2 Key	29	Wigton Steel			
	29	Hearth & Bosh		38	Hearth & Bosh
		Wigton		38	Wigton
	29	Top Wigton	13½" No. 4 Key	38	Inwall Wigton
No. 3 Key	29	Wigton Steel		38	Top Wigton
No. 4 Key	29	Wigton Steel	13½x4½x2½"		
			Straights	35	Wigton Steel

OTHER SHAPES MADE TO ORDER

REESE CLAY AND SILICA BRICK WORKS

THE Isaac Reese & Sons Company has been favorably known to the consumers of fire brick for a long period. The various brands manufactured are made from high grade material, and are standard for general mill work, etc. The REESE brand of Silica Brick has an enviable reputation, backed up by some remarkable records, for Open-Hearth Steel, Continuous Glass Tank and Copper Reverberatory Furnaces.

The tables on pages 22 and 23 show the brands and standard shapes, with page of illustration.

REESE CLAY AND SILICA BRICK WORKS STANDARD SHAPES—FIRE CLAY

Shapes	Page	Brands	Shapes	Page	Brands
9-inch Straight.	26 26 26	Phoenix Wallace W.F.B.	No. 2 Key.	29 29 29	Phoenix Wallace W.F.B.
Large 9-inch.	26 26	Phoenix Wallace	No. 3 Key.	29 29	Phoenix Wallace
Small 9-inch.	26 26	Phoenix Wallace	No. 4 Key.	29 29	Phoenix Wallace
Soap.	26 26 26	Phoenix Wallace W.F.B.	No. 1 Jamb.	29 29	Phoenix Wallace
9-inch Checker.	26	Phoenix	No. 2 Side Skew.	30 30	Phoenix Wallace
10½x4½x4½-in. Checker.	44	Phoenix	Featheredge.	27	Phoenix
No. 1 Arch.	26 26 26	Phoenix Wallace W.F.B.	No. 2 Neck.	30 30	Phoenix Wallace
No. 2 Arch.	27	Phoenix Wallace W. F. B.	No. 3 Neck.	30 30	Phoenix Wallace
No. 1 Split.	27	Phoenix Wallace W. F. B.	Regenerator Tile		
No. 2 Split.	27 27	Phoenix Wallace	18x6x3-inch	44	
No. 1 Wedge.	28 28 28	Phoenix Wallace W. F. B.	20x6x3-inch	44	
No. 2 Wedge.	28 28 28	Phoenix Wallace W. F. B.	22x6x3-inch	44	
No. 3 Wedge.	28 28	Phoenix Wallace	24x6x3-inch	44	
No. 1 Key.	29 29 29	Phoenix Wallace W. F. B.	Large 9-inch	28	Phoenix
			No. 1 Wedge	28	Wallace
			Large 9-inch	28	Phoenix
			No. 2 Wedge	28	Wallace
			Stock Hole.	32	Phoenix
			Boiler Tile		
			12x12x2-inch	00	Not shown
			15x12x2-inch	00	
			18x12x2-inch	00	

OTHER SHAPES MADE TO ORDER

REESE CLAY AND SILICA BRICK WORKS

STANDARD SHAPES—SILICA

Shapes	Page	Brands	Shapes	Page	Brands
9-inch Straight.	26	Reese	No. 3 Key	29	Reese
	26	Basic		29	Basic
Large 9-inch	26	Reese	No. 1 Jamb.	29	Basic
	26	Basic	No. 2 Skew.	30	Reese
Small 9-inch.	26	Reese		30	Basic
	26	Basic	No. 3 Neck.	30	Reese
Soap	26	Reese		30	Basic
	26	Basic	Featheredge.	27	Reese
No. 1 Arch.	26	Reese		27	Basic
	26	Basic	12 x 6 x 3 - inch		
No. 2 Arch.	27	Reese	Straight.	35	Reese
	27	Basic	12-inch No. 1 R.		
No. 1 Split.	27	Reese	Wedge.	34	Reese
	27	Basic	12-inch No. 2 R.		
No. 2 Split.	27	Reese	Wedge.	34	Reese
	27	Basic	12 x 9 x 3 - inch		
No. 1 Wedge.	28	Reese	Large Soap.	35	Reese
	28	Basic	12 x 3 x 3 - inch		
No. 2 Wedge.	28	Reese	Small Soap.	34	Reese
	28	Basic	12-inch No. 1 R.		
No. 3 Wedge.	28	Reese	Large Wedge		
	28	Basic	Soap.	34	Reese
Large 9-inch	28	Reese	12-inch No. 2 R.		
No. 1 Wedge.	28	Basic	Large Wedge		
Large 9-inch	28	Reese	Soap.	34	Reese
No. 2 Wedge.	28	Basic	12-inch No. 1		
No. 1 Key.	29	Reese	Arch.	36	Reese
	29	Basic	12-inch No. 1		
No. 2 Key.	29	Reese	Key.	34	Reese
	29	Basic	12-inch No. 2		
			Key.	34	Reese

OTHER SHAPES MADE TO ORDER

CLINTON COUNTY FIRE BRICK WORKS

CLINTON County Fire Brick Works make the following brands from high grade Clinton County flint clays:

Munro	{ First quality brick for glass works, boiler settings, malleable furnaces, rolling mills, open hearth furnaces, heating furnaces, general mill work, gas plants, cupolas, lime kilns, digesters for paper mills, and for all other work where high grade first quality clay brick are required.
Eureka	{ No. 1 quality brick for use where brick of the highest refractoriness are not required.
Hearth & Bosh Munro Inwall Munro Top Munro	{ Made especially for blast furnace linings.
Alusil	{ First quality brick for the discharge or hot end of rotary kilns.
C-Eureka	{ No. 1 quality brick for feed end of rotary kilns, hoods, etc.

The table on the following page shows the shapes and brands made, with page of illustrations.

CLINTON COUNTY FIRE BRICK WORKS

STANDARD SHAPES—FIRE CLAY

Shapes	Page	Brands	Shapes	Page	Brands
9-inch Straight	26	Munro	No. 3 Neck	30	Munro
	26	Eureka	No. 1 Circle	31	Munro
Large 9-inch	26	Munro	No. 2 Circle	31	Munro
	26	Eureka	No. 3 Circle	31	Munro
Small 9-inch	26	Munro	No. 5 Circle	31	Munro
	26	Eureka	No. 1 Cupola	31	Munro
Soap	26	Munro	No. 2 Cupola	31	Munro
	26	Eureka	No. 3 Cupola	32	Munro
No. 1 Arch	26	Munro	No. 4 Cupola	32	Munro
	26	Eureka	Stock Hole	32	Munro
No. 2 Arch	27	Munro	Boiler Tile		
	27	Eureka	12x12x2"		
No. 1 Split	27	Munro	15x12x2"		(No illustration)
	27	Eureka	18x12x2"		
No. 2 Split	27	Munro	Rotary Kiln		
	27	Eureka	Shapes		
No. 1 Wedge	28	Munro	No. 66	45	Alusil
	28	Eureka	No. 72	45	Alusil
			No. 78	45	Alusil
No. 2 Wedge	28	Munro	No. 84	45	Alusil
	28	Eureka	No. 90	45	Alusil
No. 3 Wedge	28	Munro	9-inch Straights	26	Hearth & Bosh Munro
	28	Eureka		26	Inwall Munro
Bung Arch	27	Munro		26	Top Munro
Featheredge	27	Munro	9-inch No. 1 Keys	29	Hearth & Bosh Munro
No. 1 Key	29	Munro		29	Inwall Munro
	29	Eureka		29	Top Munro
No. 2 Key	29	Munro	9-inch No. 2 Keys	29	Hearth & Bosh Munro
	29	Eureka		29	Top Munro
No. 3 Key	29	Munro	13½-inch Straights	38	Hearth & Bosh Munro
	29	Eureka		38	Inwall Munro
No. 4 Key	29	Munro		38	Top Munro
No. 1 Jamb	29	Munro	13½-inch No. 2 Keys	38	Hearth & Bosh Munro
No. 2 Side Skew	30	Munro		38	Inwall Munro
				38	Top Munro
				38	Hearth & Bosh Munro
				38	Top Munro

OTHER SHAPES MADE TO ORDER

STANDARD SHAPES

OTHER SHAPES MADE TO ORDER



9-INCH STRAIGHT

9 x 4 1/2 x 2 1/2"



LARGE 9-INCH

9 x 6 3/4 x 2 1/2"



SMALL 9-INCH

9 x 3 1/2 x 2 1/2"



SOAP

9 x 2 1/4 x 2 1/2"



CHECKER

9 x 2 3/4 x 2 3/4"



No. 1 ARCH

76 Brick to the Circle
4' 3" Inside Diameter

9 x 4 1/2 x 2 1/2 x 2 1/8"

STANDARD SHAPES

NO. 2 ARCH

38 Brick to the Circle
1' 9" Inside Diameter
 $9 \times 4\frac{1}{2} \times 2\frac{1}{2} \times 1\frac{3}{4}$ "

NO. 3 ARCH

19 Brick to the Circle
6" Inside Diameter
 $9 \times 4\frac{1}{2} \times 2\frac{1}{2} \times 1$ "

BUNG ARCH

$9 \times 4\frac{1}{2} \times 2\frac{1}{2} \times 2\frac{3}{8}$ "

NO. 1 SPLIT

$9 \times 4\frac{1}{2} \times 1\frac{1}{4}$ "

NO. 2 SPLIT

$9 \times 4\frac{1}{2} \times 2$ "

FEATHER-EDGE

$9 \times 4\frac{1}{2} \times 2\frac{1}{2} \times \frac{1}{8}$ "

STANDARD SHAPES



NO. 1 WEDGE

91 Brick to the Circle
4' 6" Inside, 6' Outside Diam.
9 x 4½ x 1⅞"



NO. 2 WEDGE

57 Brick to the Circle
2' 3" Inside, 3' 9" Outside Diam.
9 x 4½ x 1½"



NO. 3 WEDGE

57 Brick to the Circle
3' Inside, 4' 6" Outside Diam.
9 x 4½ x 3 x 2"



LARGE 9-INCH NO. 1 WEDGE

91 Brick to the Circle
4' 6" Inside, 6' Outside Diam.
9 x 6¾ x 2½ x 1⅞"



LARGE 9-INCH NO. 2 WEDGE


57 Brick to the Circle
2' 3" Inside, 3' 9" Outside Diam.
9 x 6¾ x 2½ x 1½"



KEY WEDGE

9 x 4½ x 3 x 2½ x 1½"

STANDARD SHAPES



NO. 1 KEY

113 Brick to the Circle
12' Inside, 13' 6" Outside Diam.
 $9 \times 4\frac{1}{2} \times 4 \times 2\frac{1}{2}"$




NO. 2 KEY

57 Brick to the Circle
5' 3" Inside, 6' 9" Outside Diam.
 $9 \times 4\frac{1}{2} \times 3\frac{1}{2} \times 2\frac{1}{2}"$



NO. 3 KEY

38 Brick to the Circle
3' Inside, 4' 6" Outside Diam.
 $9 \times 4\frac{1}{2} \times 3 \times 2\frac{1}{2}"$



NO. 4 KEY

25 Brick to the Circle
1' 6" Inside, 3' Outside Diam.
 $9 \times 4\frac{1}{2} \times 2\frac{1}{4} \times 2\frac{1}{2}"$



NO. 1 JAMB

$9 \times 4\frac{1}{2} \times 2\frac{1}{2}"$

STANDARD SHAPES



NO. 1 NECK

$9 \times 4\frac{1}{2} \times 3\frac{1}{2} \times 2\frac{1}{2} \times \frac{5}{8}$ "



NO. 2 NECK

$9 \times 4\frac{1}{2} \times 2\frac{1}{2} \times 1\frac{1}{2} \times \frac{5}{8}$ "



NO. 3 NECK

$9 \times 4\frac{1}{2} \times 2\frac{1}{2} \times \frac{5}{8}$ "



NO. 1 END SKEW

$9 \times 6\frac{1}{8} \times 4\frac{1}{2} \times 2\frac{1}{2}$ "



NO. 2 SIDE SKEW

$9 \times 4\frac{1}{2} \times 2\frac{1}{2} \times 1\frac{3}{4}$ "



NO. 3 EDGE SKEW

$9 \times 4\frac{1}{2} \times 2\frac{1}{4} \times 2\frac{1}{2}$ "

STANDARD SHAPES



NO. 1 OR 33-INCH CIRCLE BRICK

12 Brick to the Circle
24" Inside, 33" Outside Diam.
 $9 \times 6\frac{3}{16} \times 4\frac{1}{2} \times 2\frac{1}{2}"$



NO. 2 OR 45-INCH CIRCLE BRICK

14 Brick to the Circle
36" Inside, 45" Outside Diam.
 $9 \times 7\frac{3}{16} \times 4\frac{1}{2} \times 2\frac{1}{2}"$



NO. 3 OR 51-INCH CIRCLE BRICK

18 Brick to the Circle
42" Inside, 51" Outside Diam.
 $9 \times 7\frac{7}{16} \times 4\frac{1}{2} \times 2\frac{1}{2}"$



NO. 5 OR 84-INCH CIRCLE BRICK

32 Brick to the Circle
84" Inside, 93" Outside Diam.
 $9 \times 8\frac{1}{8} \times 4\frac{1}{2} \times 2\frac{1}{2}"$



NO. 1 CUPOLA BRICK

15 Brick to the Circle
30" Inside, 42" Outside Diam.
 $9 \times 6\frac{7}{16} \times 6 \times 3"$
 $9 \times 6\frac{7}{16} \times 6 \times 4"$



NO. 2 CUPOLA BRICK

17 Brick to the Circle
36" Inside, 48" Outside Diam.
 $9 \times 6\frac{3}{4} \times 6 \times 3"$
 $9 \times 6\frac{3}{4} \times 6 \times 4"$

STANDARD SHAPES



**No. 3
CUPOLA BRICK**

21 Brick to the Circle
48" Inside
60" Outside Diameter
 $9 \times 7\frac{3}{16} \times 6 \times 3"$
 $9 \times 7\frac{3}{16} \times 6 \times 4"$



**No. 4
CUPOLA BRICK**

25 Brick to the Circle
60" Inside
72" Outside Diameter
 $9 \times 7\frac{1}{2} \times 6 \times 3"$
 $9 \times 7\frac{1}{2} \times 6 \times 4"$



STOCK HOLE TILE
 $18 \times 9 \times 4"$



BRIDGE BLOCK
 $13 \times 6\frac{1}{2} \times 3"$

STANDARD SHAPES



NO. 101 A-SPECIAL COVER

Used in Malleable Furnaces
13 x 4½ x 3"



NO. 102 A-SPECIAL COVER

Used in Malleable Furnaces
12¾ x 11⅜ x 4½ x 3"



NO. 103 A-SPECIAL ARCH

Used in Malleable Furnaces
5' 3" Inside Diam.
13 x 4½ x 3 x 2⅝"



NO. 104 A-SPECIAL ARCH

Used in Malleable Furnaces
5' 3" Inside Diam.
12¾ x 11⅜ x 4½ x 3 x 2⅝"



POTTERY KILN TILE STRAIGHT FLATBACK

9 x 6 x 2½"



FLATBACK ARCH

9 x 6 x 3½ x 2½"
2' 6" Inside Diam.

STANDARD SHAPES—SILICA



3-INCH SERIES

12 X 3 X 3 INCH SOAP



12 X 3 INCH No. 1

WEDGE SOAP

12 x 9 x 3 x 2 1/2"

10' Inside Diameter



12 X 3 INCH No. 2

WEDGE SOAP

12 x 9 x 3 x 2"

4' Inside Diameter



12 X 3 INCH No. 1 WEDGE

12 x 6 x 3 x 2 1/2"

10' Inside Diameter



12 X 3 INCH No. 2 WEDGE

12 x 6 x 3 x 2"

4' Inside Diameter



12-INCH No. 1 KEY

12 x 6 x 5 1/2 x 3"

22' Inside Diameter



12-INCH No. 2 KEY

12 x 6 x 5 x 3"

10' Inside Diameter

See 2 1/2-Inch series, pages 35 and 36

STANDARD SHAPES—SILICA



3-INCH SERIES—CONTINUED

12 X 6 X 3 INCH STRAIGHT



12 X 9 X 3 INCH SOAP



2½-INCH SERIES

13½-INCH BINDER BRICK

13½ x 4½ x 2½"



13½-INCH STRAIGHT

13½ x 6 x 2½"



12 X 6 X 2½ INCH STRAIGHT



12 X 2½ INCH No. 1 WEDGE

12 x 6 x 2½ x 2½"

26' 9" Inside Diameter

State whether 2½ or 3-inch series is
desired

STANDARD SHAPES—SILICA



2½-INCH SERIES—CONT.

12 X 2½ INCH NO. 2 WEDGE

12' 3" Inside Diameter

12 x 6 x 2⅞ x 2½"



12 X 9 X 2½ INCH SOAP



12 X 2½ INCH NO. 1 WEDGE SOAP

12 x 9 x 2⅞ x 2½"

26' 9" Inside Diameter



12 X 2½ INCH NO. 2 WEDGE SOAP

12 x 9 x 2⅞ x 2½"

12' 3" Inside Diameter



12-INCH NO. 1 ARCH

75 Brick to the Circle

5' Inside, 6' Outside Diam.

12 x 6 x 3 x 2½"



12-INCH NO. 2 ARCH

75 Brick to the Circle

4' Inside, 5' Outside Diam.

12 x 6 x 2½ x 2"

See 3-inch series, pages 34 and 35

HEXAGON STOVE SHAPES



12 X 13 INCH HEXAGON

9" Diameter Flue

12 x 7½ x 9"



6 X 13 INCH HEXAGON

For Breaking Joints

6 x 7½ x 9"



6 X 13 INCH HEXAGON

For Finishing Top

6 x 7½ x 9"

Typical of many shapes made—
shapes for special stoves shown
with cuts of stoves.

See pages 62 to 77 inclusive

BLAST FURNACE LINING BRICK STANDARD SHAPES



13½-INCH STRAIGHT

13½ x 6 x 3"

also

13½ x 6 x 2½"



13½-INCH No. 2 KEY

85 Brick to the Circle

11' 3" Inside Diameter

13½ x 6 x 5 x 3"

also

13½ x 6 x 5 x 2½"



13½-INCH No. 4 KEY

52 Brick to the Circle

6' Inside Diameter

13½ x 6 x 4⅜ x 3"

also

13½ x 6 x 4⅜ x 2½"



9-INCH STRAIGHT

9 x 4½ x 2½"



9-INCH No. 1 KEY

113 Brick to the Circle

12' Inside Diameter

9 x 4½ x 4 x 2½"



9-INCH No. 2 KEY

57 Brick to the Circle

5' 3" Inside Diameter

9 x 4½ x 3½ x 2½"

BLAST FURNACE LINING BRICK STANDARD SHAPES



9 X 6 INCH No. 2 KEY

For 13' Circle
91 Brick to the Circle
 $9 \times 6 \times 5\frac{3}{8} \times 3$
also



9 X 6 INCH No. 4 KEY

For 6' Circle
47 Brick to the Circle
 $9 \times 6 \times 4\frac{13}{16} \times 3$

9 X 6 INCH STRAIGHT

for enlarging above circles
 $9 \times 6 \times 3$



BLAST FURNACE ARCH BRICK FOR GAS FLUES

13 1/2 X 9 INCH ARCH

For 3, 4 and 5' Inside Diameter

For 3'— $13\frac{1}{2} \times 9 \times 3\frac{1}{2} \times 2\frac{1}{4}$ "

For 4'— $13\frac{1}{2} \times 9 \times 3\frac{1}{2} \times 2\frac{11}{32}$ "

For 5'— $13\frac{1}{2} \times 9 \times 3\frac{1}{2} \times 2\frac{11}{16}$ "



13 1/2 X 9 INCH STRAIGHT

For enlarging above circles
 $13\frac{1}{2} \times 9 \times 3\frac{1}{2}$ "



9 X 9 INCH ARCH

For 3, 4 and 5' Inside Diameter

For 3'— $9 \times 9 \times 3\frac{1}{2} \times 2\frac{1}{4}$ "

For 4'— $9 \times 9 \times 3\frac{1}{2} \times 2\frac{11}{32}$ "

For 5'— $9 \times 9 \times 3\frac{1}{2} \times 2\frac{11}{16}$ "



9 X 9 INCH STRAIGHT

For enlarging above circles
 $9 \times 9 \times 3\frac{1}{2}$ "

COKE OVEN SHAPES



**H.-W.
CROWN BRICK**

$9 \times 4\frac{1}{2} \times 4\frac{1}{16} \times 2\frac{1}{2} \times 2\frac{1}{4}$ "



**H.-W.
LINER BRICK**

$9 \times 4\frac{1}{2} \times 4 \times 2\frac{1}{2}$ "



**BOTTOM TILE
No. 14**

$12 \times 12 \times 3$ "

also

$12 \times 12 \times 4$ "



**TRUNNEL HEAD
No. 42**

$24 \times 22 \times 10 \times 14 \times 15$ "

COKE OVEN SHAPES



DOOR BLOCK

5 x 4 x 4"



CROWN SOAP

9 x 2½ x 2¼ x 2¼ x 2⅓"



**SHAPE No. 66 OR
12-PIECE TRUNNEL**

23 x 21 x 10 x 13 x 14"

12-Piece Section

10 x 3⅜ x 5⅙ and 3⅝ x 5⅙



RING

Either in 4 Sections or
1 Piece

24 x 8 with 12" hole

See pages 78 to 88 inclusive
for coke oven plans

SIEMENS STEEL FURNACE BLOCKS
IN SILICA



See pages 98 to 100 inclusive for plans of crucible furnaces

SIEMENS STEEL FURNACE BLOCKS
IN SILICA



SIEMENS STEEL FURNACE COVER BRICK
MADE IN FIRE CLAY ONLY



BEVEL COVER

12 x 4 x 3 $\frac{3}{4}$ x 3"



SQUARE COVER

12 x 4 x 3"



ARCH COVER

12 x 4 x 3 x 2 $\frac{1}{2}$ "



SPECIAL COVER

12 x 4 $\frac{1}{2}$ x 3 x 2 $\frac{1}{2}$ "



No. 2

11 x 4 $\frac{1}{2}$ x 2 $\frac{1}{2}$ x 1 $\frac{1}{2}$ "

REGENERATOR TILE AND BRICK



The following sizes are kept in stock:

16 x 6 x 3

21 x 6 x 3

24 x 9 x 3

18 x 6 x 3

22 x 6 x 3

26 x 9 x 3

20 x 6 x 3

24 x 6 x 3

All other sizes made to order



REGENERATOR OR CHECKER BRICK

SHAPES FOR ROTARY KILNS



9-INCH ROTARY KILN BLOCKS

No. 66

23 Brick to the Circle
66" Outside Diameter
H-W SPECIAL ALUMINOUS
ALUSIL

$9 \times 9 \times 6\frac{9}{16} \times 4"$



No. 72

26 Brick to the Circle
72" Outside Diameter
H-W SPECIAL ALUMINOUS
ALUSIL

$9 \times 9 \times 6\frac{3}{4} \times 4"$



No. 78

28 Brick to the Circle
78" Outside Diameter
H-W SPECIAL ALUMINOUS
ALUSIL

$9 \times 9 \times 6\frac{15}{16} \times 4"$



No. 84

30 Brick to the Circle
84" Outside Diameter
H-W SPECIAL ALUMINOUS
ALUSIL

$9 \times 9 \times 7\frac{1}{16} \times 4"$



No. 90

31 Brick to the Circle
90" Outside Diameter
H-W SPECIAL ALUMINOUS
ALUSIL

$9 \times 9 \times 7\frac{3}{16} \times 4"$

SHAPES FOR ROTARY KILNS



NO. 96

96" Outside Diameter
34 to a Circle
H.-W. Special Aluminous
Alusil
 $9 \times 9 \times 7\frac{5}{16} \times 4"$



NO. 12

60" Outside Diameter
21 to a Circle
H.-W. Special Aluminous
Alusil
 $9 \times 6 \times 7\frac{3}{16} \times 4"$



NO. 13

72" Outside Diameter
25 to a Circle
H.-W. Special Aluminous
Alusil
 $9 \times 6 \times 7\frac{1}{2} \times 4"$



NO. 14

84" Outside Diameter
30 to a Circle
H.-W. Special Aluminous
Alusil
 $9 \times 6 \times 7\frac{23}{32} \times 4"$



NO. 16

84" Outside Diameter
30 to a Circle
H.-W. Special Aluminous
Alusil
 $9 \times 9 \times 6\frac{21}{32} \times 12"$

SHAPES FOR ROTARY KILNS



No. 18
FEED END BLOCK

72" Outside Diameter
25 to a Circle
C. Tyrone
C. Eureka
12 x 12 x 6 x 1 x $9\frac{1}{32}$ x 5"



No. 19
DISCHARGE END BLOCK

84" Outside Diameter
29 to a Circle
H.-W. Special Aluminous
Alusil
11 x 9 x 12 x $9\frac{3}{16}$ x $7\frac{1}{8}$ "



No. 20
CEMENT KILN SHAPE

32" Inside Diameter
29 to a Circle
12 x 4 x $4\frac{1}{2}$ x $3\frac{1}{2}$ "



No. 21
CEMENT KILN SHAPE

5' 4" Inside Diameter
51 to a Circle
12 x 4 x $4\frac{1}{2}$ x 4"



No. 22
CEMENT KILN SHAPE

8' 0" Inside Diameter
76 to a Circle
12 x 6 x $4\frac{1}{2}$ x 4"

Any shapes desired will be made
to order

RECUPERATOR FLUE TILE



Shapes similar to the above cut are largely used in various kinds of gas, melting and heating furnaces and recuperators, where a high grade of brick is required.

We are well equipped for doing such work, and where a large quantity is needed, can get them out in the best possible shape and at a reasonable cost.

SHAPES FOR CONVERTER BOTTOMS



We illustrate above several shapes for converter bottoms; other shapes will be made to order.


TYPICAL LOCOMOTIVE FIRE BRICK



All types of locomotive tile made to order.


We furnish locomotive tile to many of the largest and most important railway systems in the country, having a total mileage of more than forty thousand miles.

CHROME SHAPES




STRAIGHT, STANDARD SIZE

H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{1}{2}$ "




NO. 1 WEDGE, STANDARD SIZE

88 Brick to the Circle
 4' 6" Inside Diameter
 H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{1}{2} \times 1\frac{7}{8}$ "




NO. 2 WEDGE, STANDARD SIZE

55 Brick to the Circle
 2' 2" Inside Diameter
 H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{1}{2} \times 1\frac{1}{2}$ "



NO. 1 KEY, STANDARD SIZE

110 Brick to the Circle
 11' 3" Inside Diameter
 H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 3\frac{7}{8} \times 2\frac{1}{2}$ "




NO. 2 KEY, STANDARD SIZE

56 Brick to the Circle
 5' Inside Diameter
 H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 3\frac{3}{8} \times 2\frac{1}{2}$ "

THE shapes shown will generally answer all purposes for which chrome brick are required.

OTHER SHAPES WILL BE MADE TO ORDER.

MAGNESIA SHAPES




STRAIGHT, STANDARD SIZE

H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{3}{8}$ "
also

FULL SIZE

$9 \times 4\frac{1}{2} \times 2\frac{1}{2}$ "




NO. 1 ARCH, STANDARD SIZE

73 Brick to the Circle
3' 10" Inside Diameter
H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{3}{8} \times 2$ "
also

FULL SIZE

$9 \times 4\frac{1}{2} \times 2\frac{1}{2} \times 2\frac{1}{8}$ "




NO. 2 ARCH, STANDARD SIZE

37 Brick to the Circle
1' 7" Inside Diameter
H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{3}{8} \times 1\frac{5}{8}$ "
also

FULL SIZE

$9 \times 4\frac{1}{2} \times 2\frac{1}{2} \times 1\frac{3}{4}$ "




NO. 3 ARCH, STANDARD SIZE

19 Brick to the Circle
5" Inside Diameter
H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{3}{8} \times 1\frac{3}{8}$ "
also

FULL SIZE

$9 \times 4\frac{1}{2} \times 2\frac{1}{2} \times 1$ "




NO. 1 WEDGE, STANDARD SIZE

88 Brick to the Circle
4' 1" Inside Diameter
H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{3}{8} \times 1\frac{3}{4}$ "
also

FULL SIZE

$9 \times 4\frac{1}{2} \times 2\frac{1}{2} \times 1\frac{7}{8}$ "

MAGNESIA SHAPES




NO. 2 WEDGE, STANDARD SIZE

55 Brick to the Circle
2' Inside Diameter
H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{3}{8} \times 1\frac{1}{8}$ "
also

FULL SIZE

$9 \times 4\frac{1}{2} \times 2\frac{1}{2} \times 1\frac{1}{2}$ "




SOAP, STANDARD SIZE

H.-W. R. Co.
 $8\frac{3}{4} \times 2\frac{3}{16} \times 2\frac{3}{8}$ "
also

FULL SIZE

$9 \times 2\frac{1}{4} \times 2\frac{1}{2}$ "




SPLIT, STANDARD SIZE

H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 1\frac{3}{16}$ "
also

FULL SIZE

$9 \times 4\frac{1}{2} \times 1\frac{1}{4}$ "




NO. 1 KEY, STANDARD SIZE

110 Brick to the Circle
11' 3" Inside Diameter
H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 3\frac{7}{8} \times 2\frac{3}{8}$ "
also

FULL SIZE

$9 \times 4\frac{1}{2} \times 4 \times 2\frac{1}{2}$ "



NO. 2 KEY, STANDARD SIZE

55 Brick to the Circle
5' Inside Diameter
H.-W. R. Co.
 $8\frac{3}{4} \times 4\frac{3}{8} \times 3\frac{3}{8} \times 2\frac{3}{8}$ "
also

FULL SIZE

$9 \times 4\frac{1}{2} \times 3\frac{1}{2} \times 2\frac{1}{2}$ "

Other shapes made to order

BLAST FURNACE LININGS

WE have been making blast furnace linings for the last thirty-eight years, and have made more than 90 per cent. of all the linings used in the United States. Our linings have been used under every imaginable condition, under hundreds of different managers, in all types of furnaces, and with all classes of ore and fuel.

In addition to furnishing hundreds of linings for large modern furnaces running on Lake ores and Connellsville coke, many linings have been supplied to smaller furnaces burdened with magnetite, limonite, brown, zincy, Cornwall, manganese and zinc residuum ores; and fuels such as high sulphur coke, anthracite and charcoal, which create conditions that are very hard on furnace linings.

We have been as successful in meeting the peculiar conditions under which many of these furnaces are operated as in the large modern furnaces in the Pittsburgh district running entirely on Bessemer iron.

In addition to the name of the brand, all of our blast furnace brick are now branded "HEARTH & BOSH," "INWALL" or "TOP." This is done to make it certain that the brick will be put into that part of the furnace for which they were made.

In order to get uniformly satisfactory results from a furnace, it is of great importance that the brick used for lining downcomers and flues be able to resist the cutting action of strong blasts charged with ore dust and cutting particles of coke. "PIPE BENEZET" and "PIPE WOODLAND" brick are made especially for this purpose and give good results.

Modern blast furnace practice, with closed tops, skip hoist, revolving tops and high-pressure blast, makes it more essential than ever before to use only the best blast furnace brick that can be manufactured. For thirty-eight years this branch of our business has received special attention, with the result that the records of tonnage made with our linings are not approached by the linings of any of our competitors. Some of these records are shown on pages 56 and 57. The cut on page 60 shows 9-inch and 13½-inch brick as laid in a furnace wall.

BOTTOM BLOCKS

THE cuts on page 61 show the bottom blocks used at the present time. All blocks are rectangular, true to shape and form, close in bond, and made under heavy pressure.

All brands made of Pennsylvania clays are 18 x 12 x 8 inches. The Portsmouth Harbison-Walker brands are 18 x 9 x 4½ inches.

SOME RECORD AND GOOD RUNS "BENEZET" AND "WOODLAND" LININGS PITTSBURGH DISTRICT AND VALLEYS

Size of Furnace	Product and Tonnage	Period in Blast	Lining
22 x 100'	1,287,381	Benezet
22 x 100'	1,097,314	Benezet
22 x 100'	1,134,382	Benezet
22 x 100'	950,774	Benezet
20 x 80'	Bessemer, 1,296,192	Benezet
20 x 80'	{ Bessemer, 858,160	Benezet
	{ Spiegel, 18,065	Benezet
	{ Ferro, 19,635	Benezet
	Total, 895,860		
20 x 90'	Bessemer, 942,365	Benezet
20 x 90'	Bessemer, 870,255	Benezet
20 x 90'	Bessemer, 635,741	Benezet
20 x 80'	Bessemer, 632,669	Benezet
20 x 80'	Bessemer, 608,103	Benezet
20 x 80'	Bessemer, 580,060	Benezet
20 x 80'	Bessemer, 793,892	Benezet
20 x 80'	600,957	Benezet
20 x 80'	596,491	Benezet
20 x 80'	{ Mill Iron, 380,000		
	{ Bessemer, 117,000		
	{ Spiegel, 25,000		
	Total, 522,000	6 yrs. 1 mo.	Benezet
20 x 80'	Bess'r and Mill 550,000	6 yrs. 1 mo.	Benezet
18 x 78'	327,000	5 yrs. 7 mos.	Benezet
23 x 105 $\frac{2}{3}$ '	572,000	3 yrs. 3 mos.	
	565,000	3 yrs. 4 mos.	
20 x 80'	Bessemer, 520,356	Woodland
20 x 80'	{ Bess'r, 322,617		
	{ Ferro, 5,026		
	{ Spiegel, 36,503		
	Ferro Sil., 688		
	Total, 364,834	Woodland

OTHER DISTRICTS

18 x 74'	Foundry, 152,462	3 yrs.	Woodland
16 x 76'10"	Foundry, 235,000	4 yrs. 3 $\frac{1}{2}$ mos.	Woodland
16 x 63'10"	Foundry, 202,354	3 yrs. 10 mos.	Woodland
15 x 66' 9"	Foundry, 196,392	5 yrs. 3 mos.	Woodland
16 x 63'10"	F'dry & Bess'r, 306,290	5 yrs. 3 mos.	Woodland
17 x 83'	Foundry, 275,000	3 yrs. 6 mos.	Woodland
18'6" x 91'	Bess'r, over 700,000	4 yrs. 6 mos.	Benezet


Fifty-three (53) of our best records show a production of 34,519,189 tons of iron, an average of 651,305 tons per lining.

SOME RECENT RECORD AND GOOD RUNS

District	Size of Furnace	Product and Tonnage	Period in Blast	Lin- ings
Chicago	17' 6" x 80' 0"	Bessemer 1,250,000	8 years	P-Ky
Chicago	18' 6" x 78' 0"	Foundry 521,168	7 yrs. 3 mos. 11 days	Woodland
Pittsburgh	22' 0" x 100' 0"	Bessemer and basic 935,000	5 years	Benezet
Pittsburgh	22' 0" x 100' 0"	Basic 931,026	5 years	Benezet
Pittsburgh	22' 0" x 100' 0"	Basic 1,202,056	7 yrs. 11 mos. 9 days	Benezet
Pittsburgh	22' 0" x 100' 0"	Basic 1,023,000	7 years	Benezet†
Pittsburgh	14' 0" x 76' 0"	Bessemer 770,000	9 yrs. 2 mos.	Benezet
Pittsburgh	23' 0" x 100' 0"	Bessemer over 900,000	4 yrs. 4 mos.	Benezet
Pittsburgh	21' 0" x 90' 0"	Bessemer 668,000	5 yrs. 2 mos.	Benezet
Pittsburgh	23' 0" x 100' 0"	Bessemer 902,900	4 yrs. 3 mos. 2 days	Benezet
Pittsburgh	19' 6" x 93' 0"	Bessemer and Spiegel 369,197	5 yrs. 4 mos.	Woodland
Pittsburgh	19' 6" x 93' 0"	Bessemer 520,000	6 yrs. 9 mos.	Woodland
Pittsburgh	20' 0" x 96' 0"	Bessemer 850,000	6 yrs. 6 mos.	Clfd
Pittsburgh	23' 0" x 100' 0"	Bessemer 1,327,000	6 yrs. 8 mos.	Benezet
Wheeling	19' 0" x 75' 2"	Bessemer over 600,000	6 years	Benezet
Wheeling	17' 0" x 75' 0"	Bessemer 600,000	7 years	Benezet
Wheeling	21' 6" x 106' 9"	Bessemer over 500,000	4 yrs. 5 mos.	Benezet
*Wheeling	23' 0" x 103' 4"	Bessemer 453,240	5 years	Benezet
*Valleys	23' 0" x 106' 6"	Bessemer 800,000	5 yrs. (nearly)	Benezet
*Valleys	23' 0" x 106' 6"	Bessemer 600,000	4 years	Benezet
Valleys	19' 0" x 80' 0"	Bessemer and basic 411,381	4 yrs. 11 mos.	Benezet
Valleys	16' 5" x 75' 0"	Bessemer 229,008	5 yrs. 8 mos. 28 days	Benezet
Valleys	14' 1" x 64' 0"	Bessemer 400,000	4 years	Benezet
Valleys	20' 0" x 97' 0"	Bessemer 900,000	4 years	Clfd
Valleys	20' 0" x 96' 0"	Bessemer 827,000	6 yrs. 2 mos.	Clfd
Valleys	19' 0" x 77' 0"	Foundry 709,717	6 yrs. 5 mos.	Woodland
Eastern Pa.	18' 0" x 70' 0"	Basic 220,000	5 years	Woodland
Eastern Pa.	18' 0" x 70' 0"	Basic 180,283	3 yrs. 8 mos. 7 days	Woodland
Eastern Pa.	17' 6" x 76' 0"	Foundry and basic 219,910	5 years	Woodland
†Virginia	17' 0" x 75' 0"	Foundry over 200,000	3 yrs. 2 mos.	Woodland
*Canada	15' 6" x 80' 0"	Basic 170,000		Woodland
Alabama	17' 0" x 76' 0"	Foundry 254,356	3 yrs. 7 mos. 20 days	P-Ky


*Still running.

†Best record ever made in Virginia.

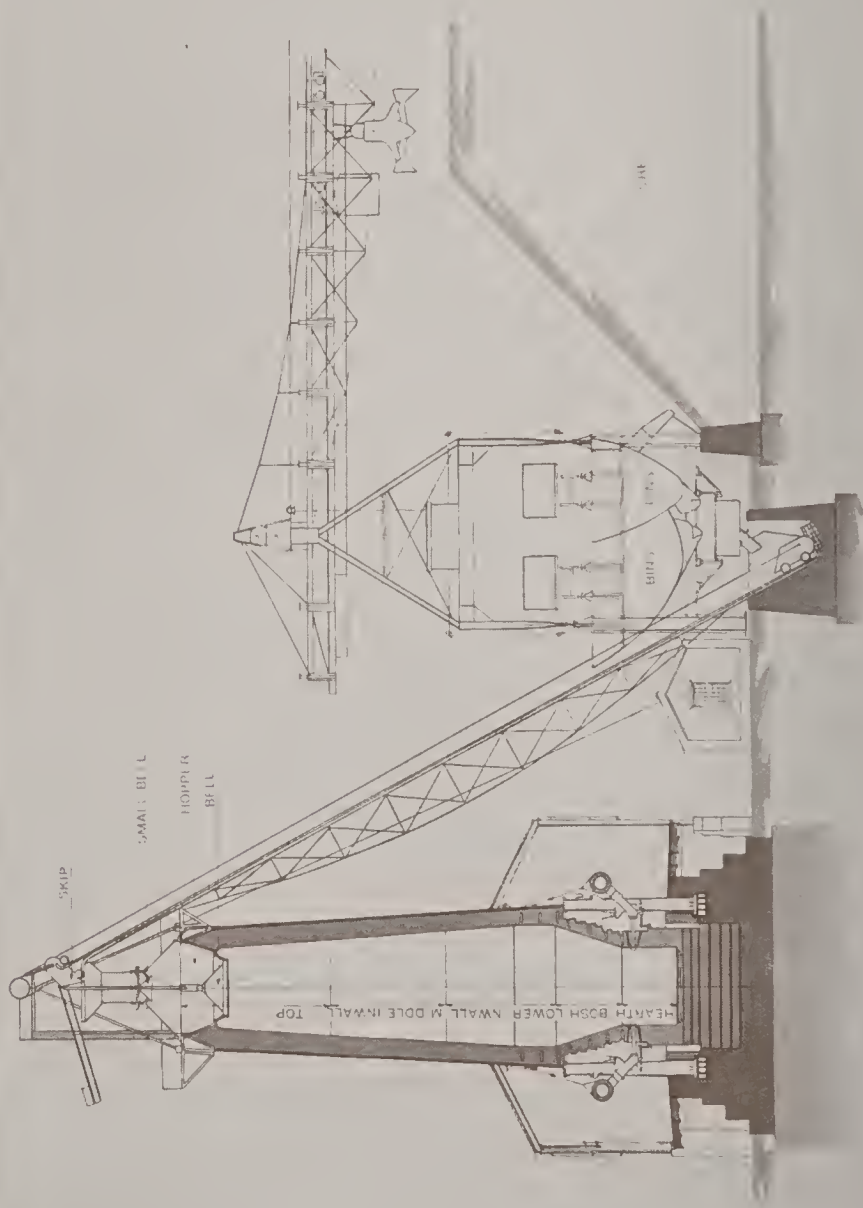


SECTION OF BLAST FURNACE SHOWING FILLING ARRANGEMENT, BINS AND ORE BRIDGE


SECTIONAL VIEW BLAST FURNACE
HEARTH AND BOSH

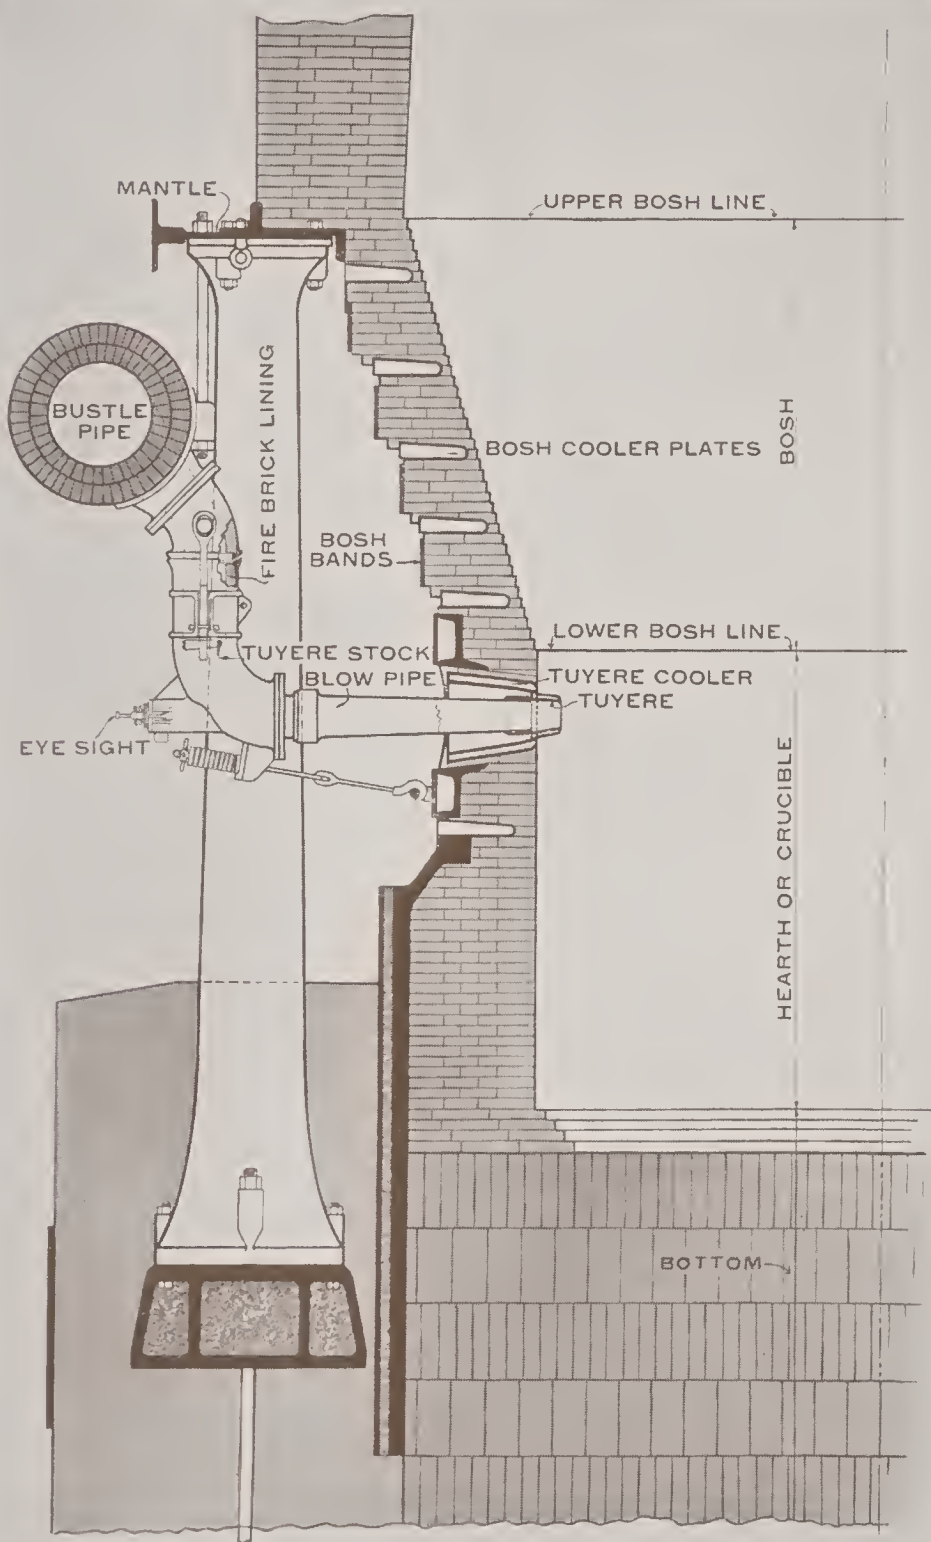

MODERN BLAST FURNACE
LINING

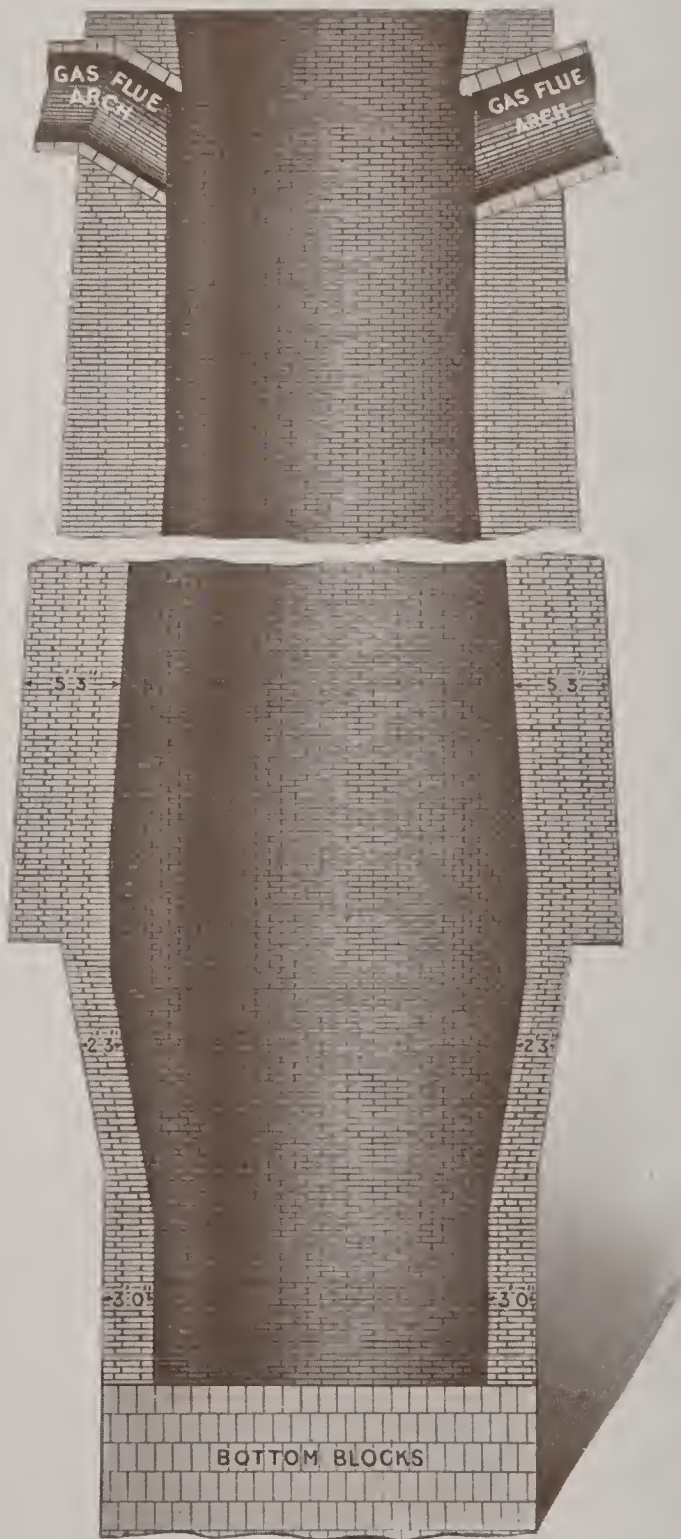

BLAST FURNACE BOTTOM BLOCKS

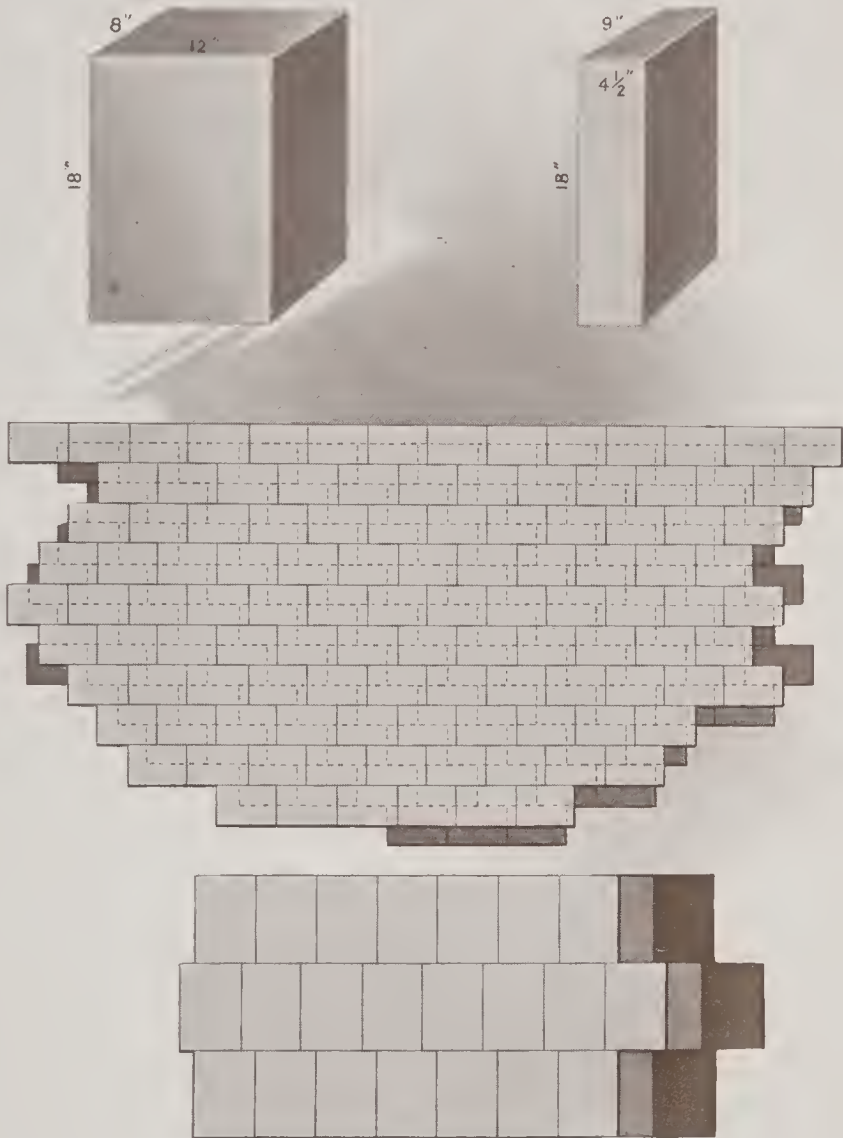

Above cuts show method of setting blocks and breaking joints in construction of furnace hearth.

See page 55 for description of blocks and page 133 for number required for different diameters.

BLAST FURNACE STOVE BRICK

BLAST furnace stove brick are only second in importance to the furnace lining, for the reason that it is not as costly to cut a stove out for repairs as to shut down a furnace for a new lining; but, owing to the heavy burden carried and the disintegrating tendency of hot gases constantly varying in temperature, the difficulties to contend with in making a good stove brick are equal, though different, to those met with in making a good lining.

The essential qualities in blast furnace stove brick are, capacity to absorb heat readily from the combustion of waste furnace gases, readiness to give off this heat rapidly to the air that is blown into the stove, and strength of bond between the particles of fire clay to resist the disintegrating action of the hot gases. These qualities can only be obtained by making the brick of high grade fire clay that will stand sufficient heat to bond thoroughly without vitrifying. In service, although stove brick are not subjected to the intense heat of the melting zone of the blast furnace, the weight carried and the long continued heat are apt to cause a gradual fusing, unless high grade clay with a liberal margin of refractoriness is used in mak-

ing the brick. Glazed or vitrified brick will neither absorb nor give off heat as rapidly as porous or non-vitrified material. If brick are made of sufficiently refractory clay, but not well bonded, or made by any modification of the dry process, and are not well burned, they are apt to disintegrate.


Through lack of attention to the above requirements, we have been called upon to replace competitors' stove linings which have been in service less than one year. Records and non-vitrified bats from old stove linings show that our stove lining brick are perfectly adapted to the service required.

In connection with illustrations of typical stoves in use, a cut of the special shape used in each of several types is shown; these, and all similar shapes for stoves, are made from good clay, burned at a high temperature in order to enable the brick to resist the disintegrating action of the hot gases.


For cuts of stoves in general use, see pages 64 to 77, inclusive.

JULIAN KENNEDY STOVE

Julian Kennedy, Pittsburgh, Pa., Engineer

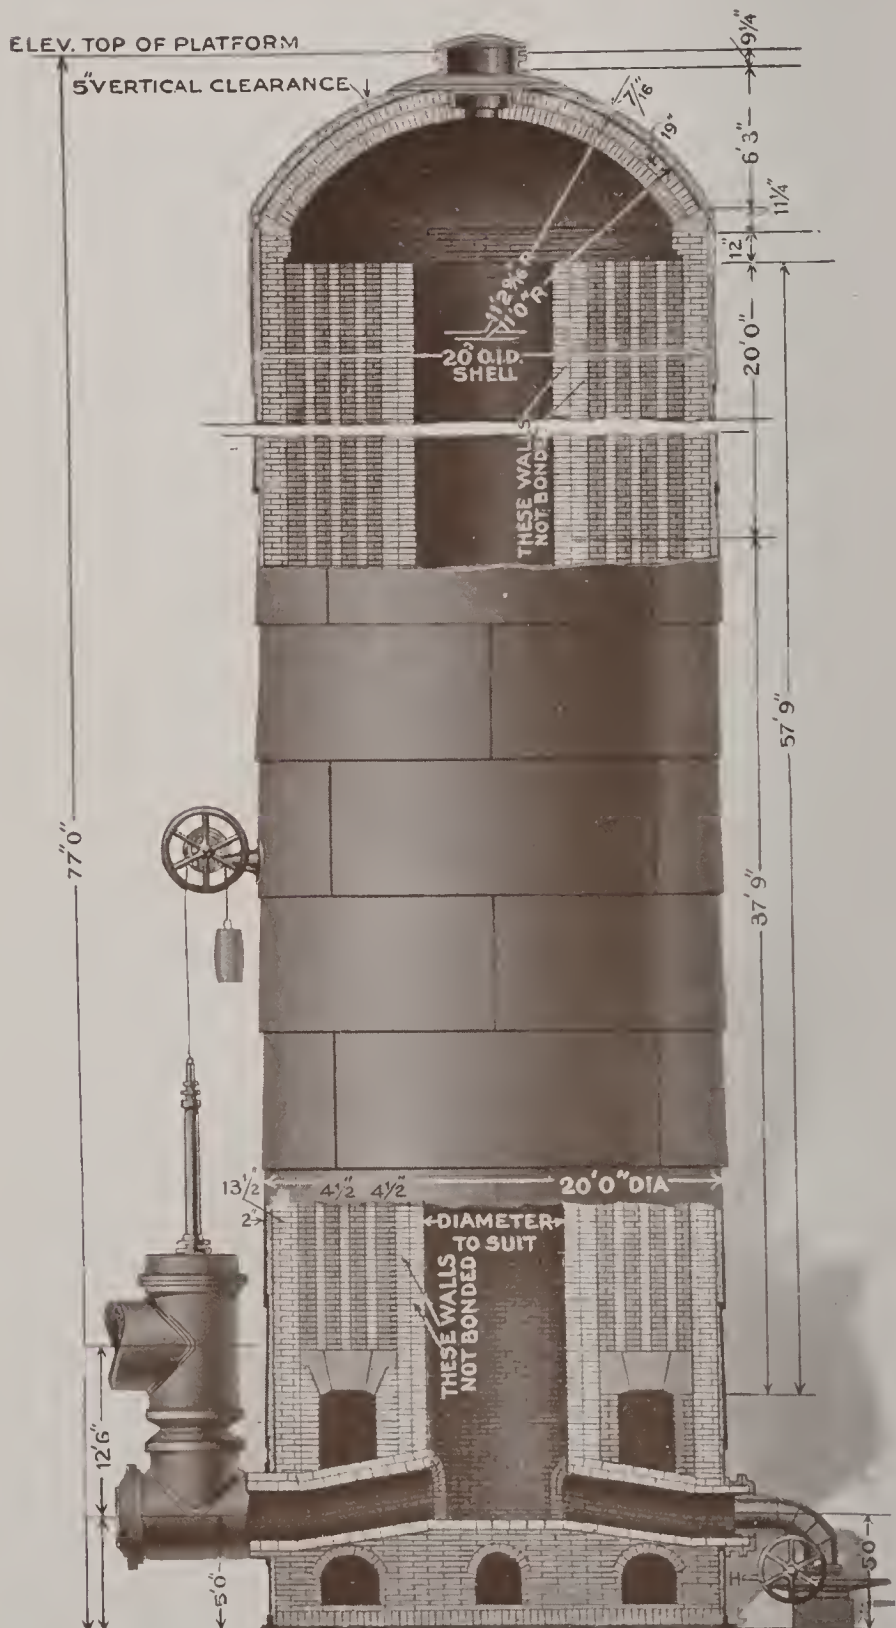


JULIAN KENNEDY STOVE
Julian Kennedy, Pittsburgh, Pa., Engineer

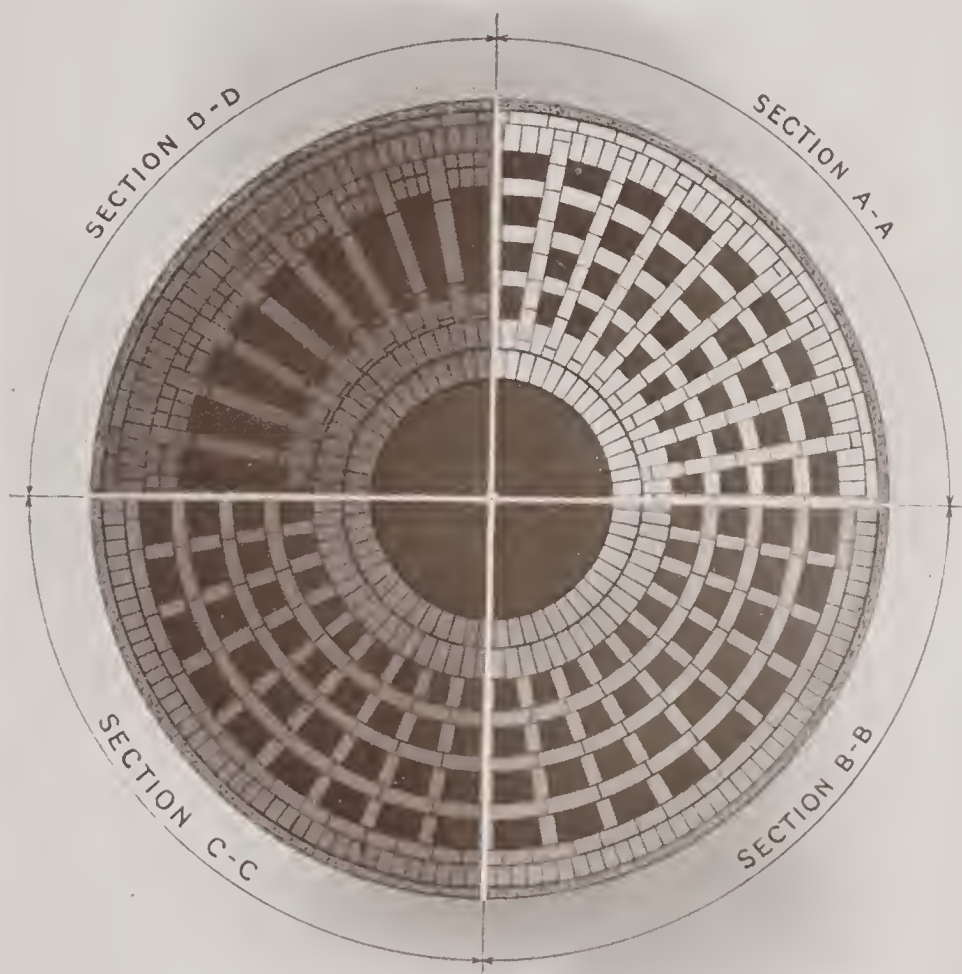


McCLURE PATENT STOVE

G. W. McClure, Son & Co., Pittsburgh, Pa., Engineers

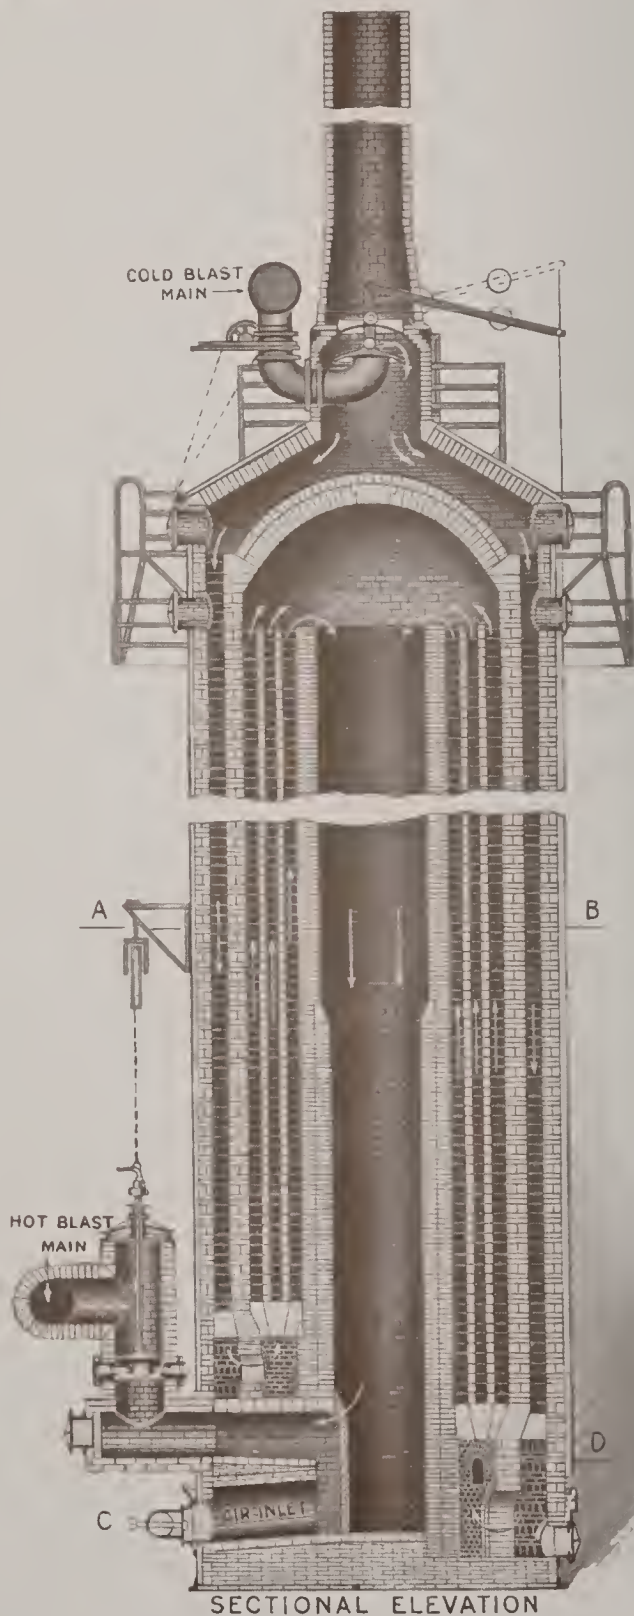

MCCLURE PATENT STOVE

G. W. McClure, Son & Co., Pittsburgh, Pa. Engineers

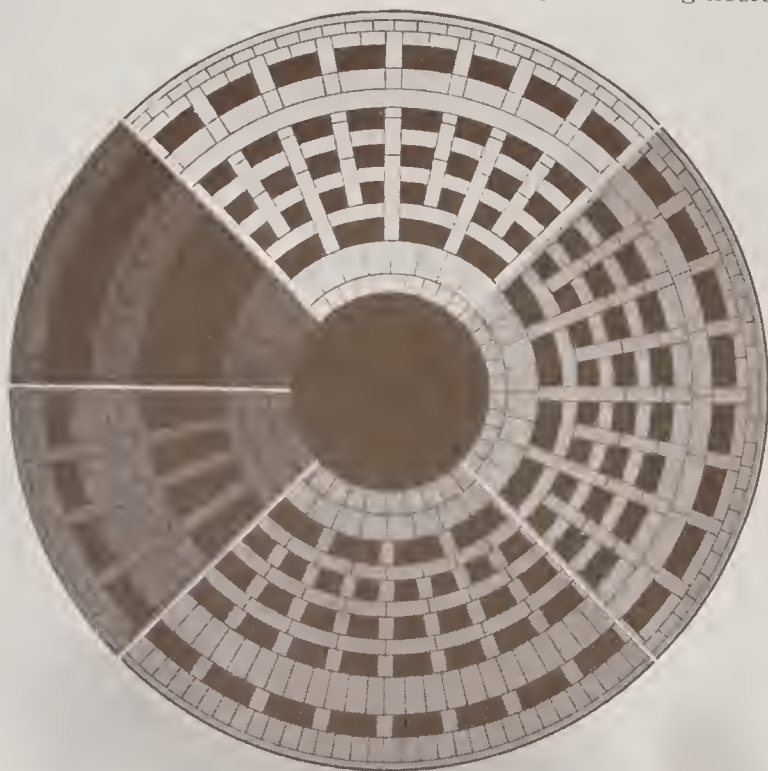



SECTION THROUGH A B



SECTION THROUGH C D

ROBERTS PATENT STOVE


F. C. Roberts & Co., Philadelphia, Pa., Engineers

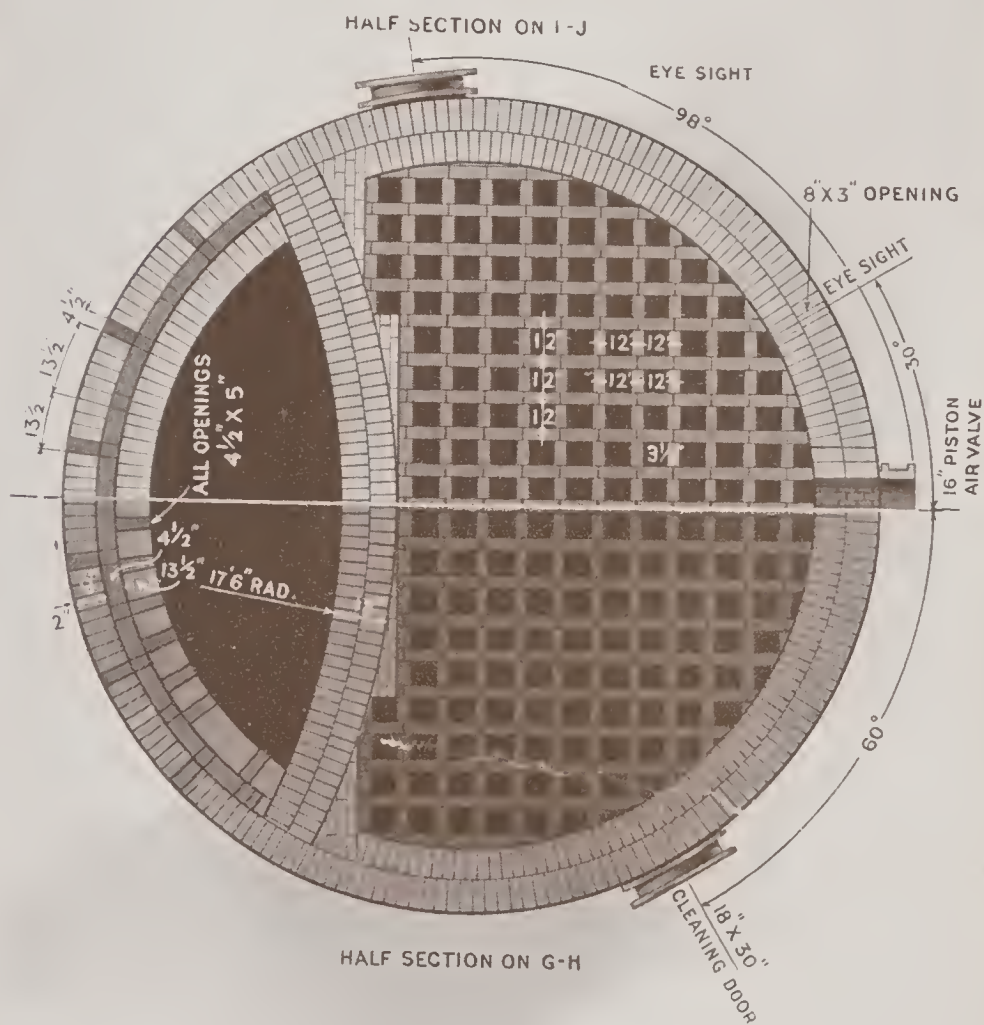

Checker Brick


FOOTE PATENT STOVE

D. Lamond & Son, Ferguson Block, Pittsburgh, Pa., Engineers

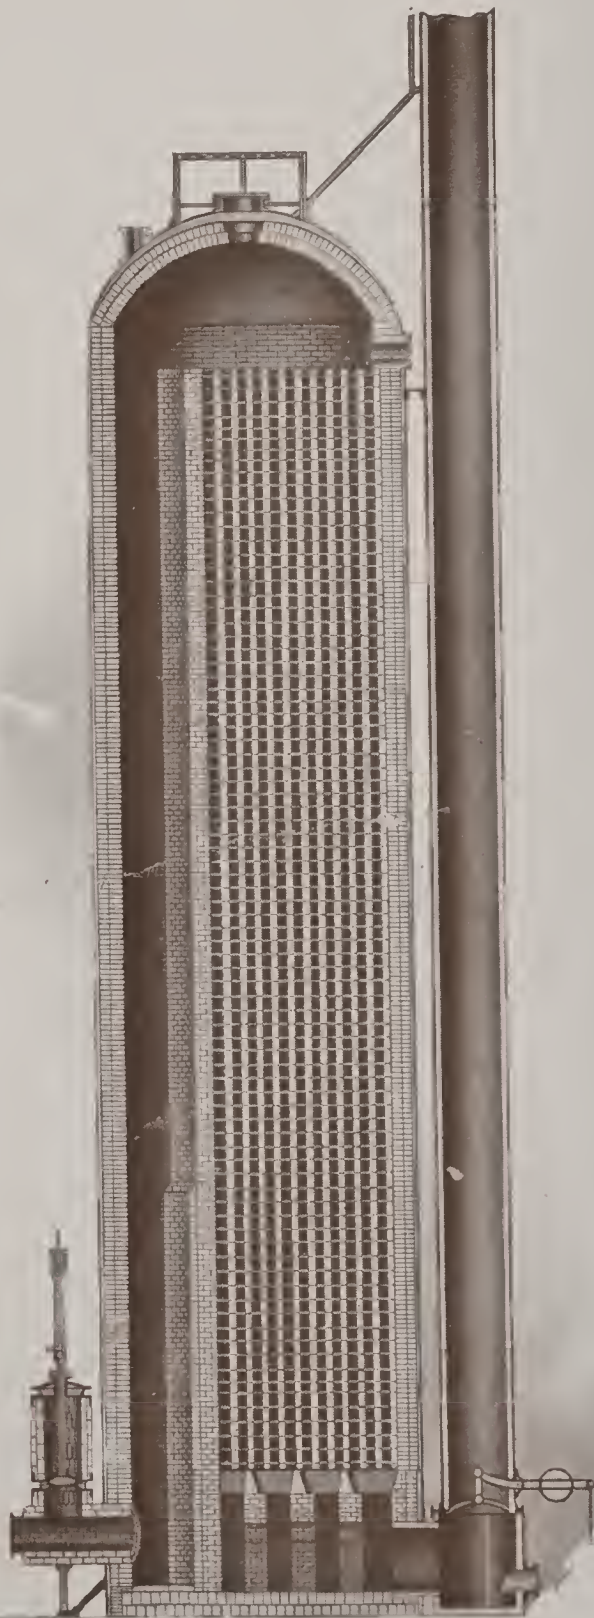

FOOTE STOVE

D. Lamond & Son, Ferguson Block, Pittsburgh, Pa., Engineers

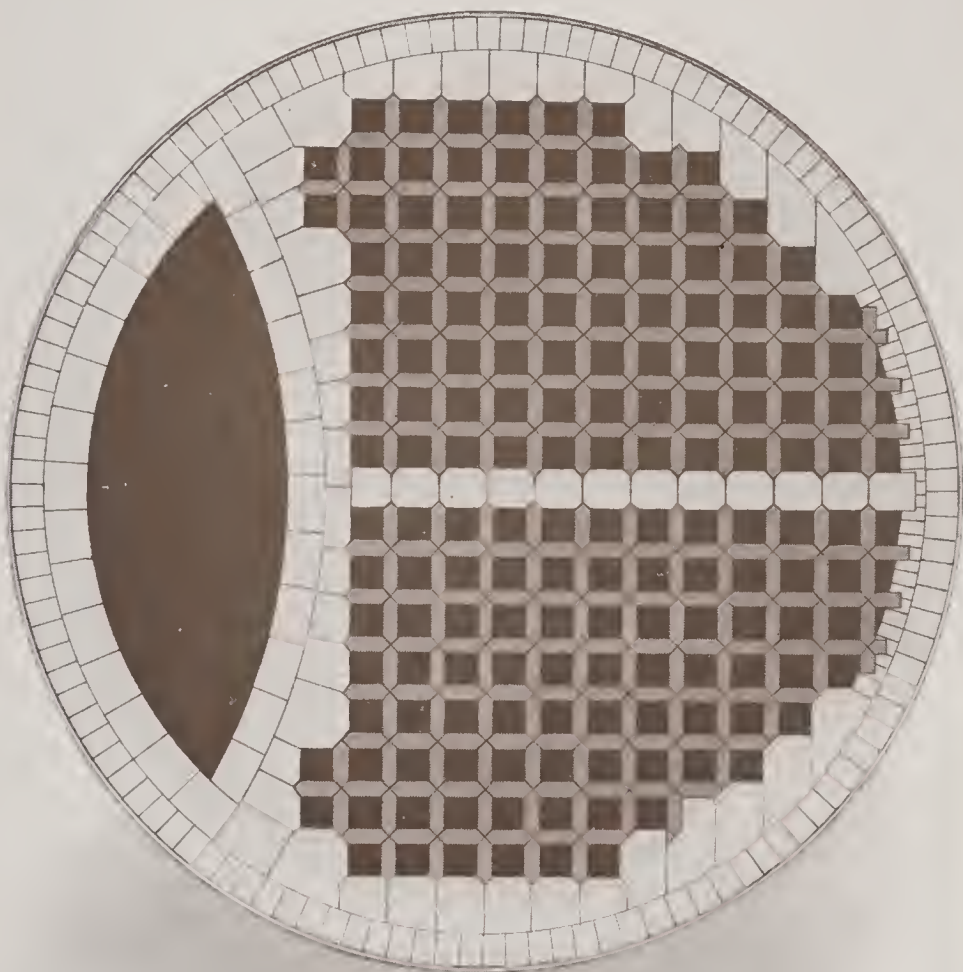


ENLARGED CROSS SECTION



CHECKER BRICK



CALDER HOT BLAST STOVE

The S. R. Smythe Co., Engineers, Pittsburgh, Pa.

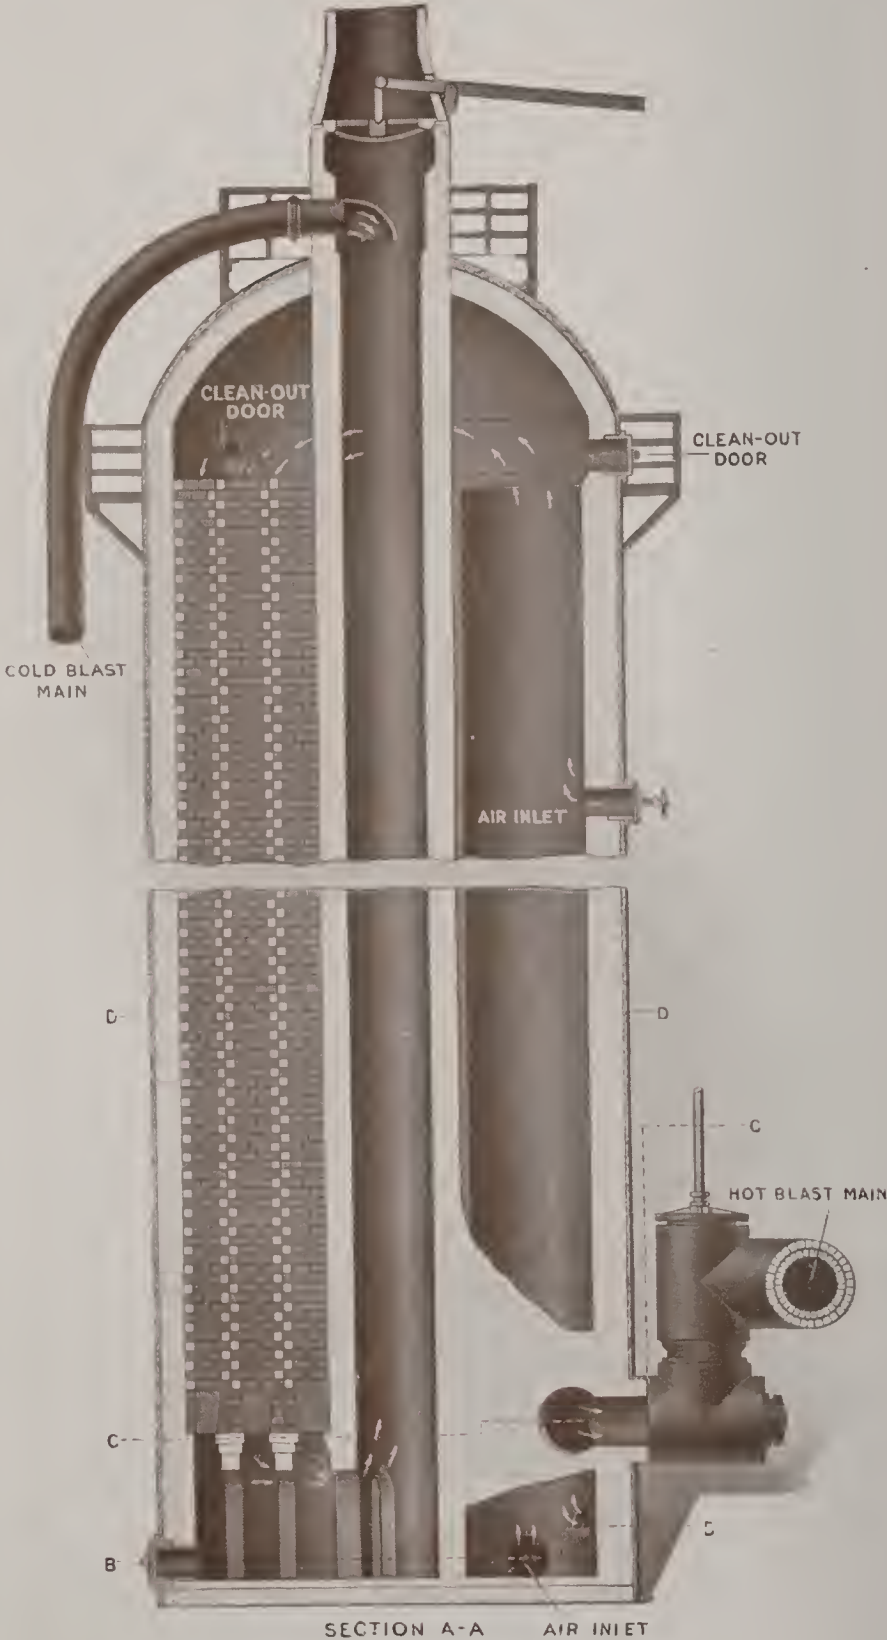

CALDER HOT BLAST STOVE

The S. R. Smythe Co., Engineers, Pittsburgh, Pa.

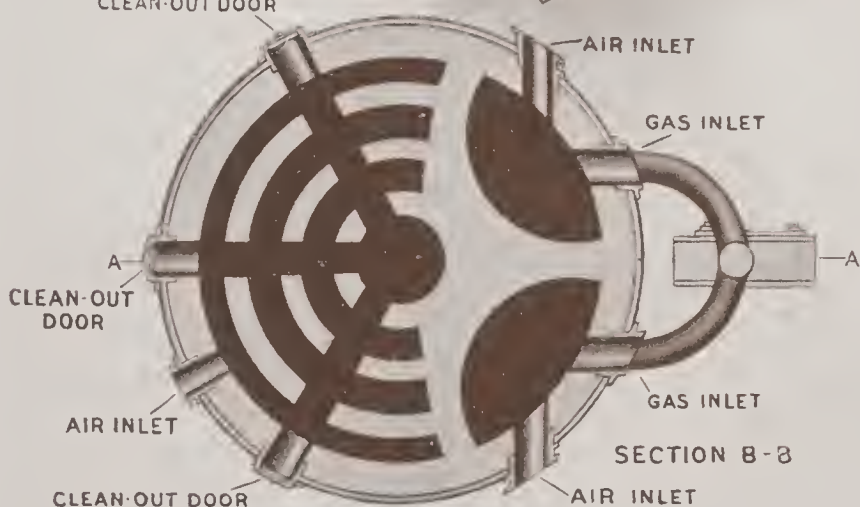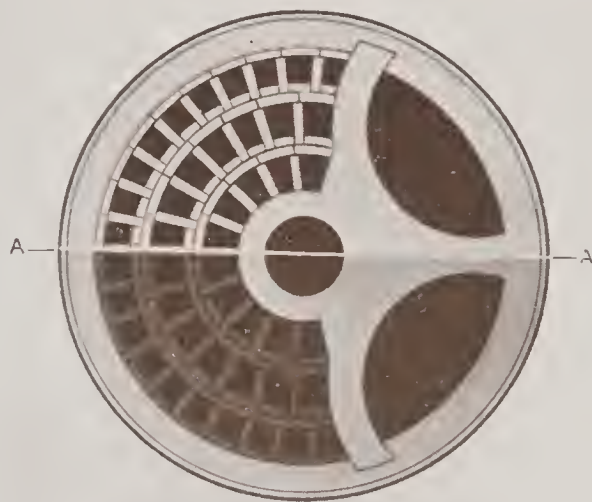


NOTE:

MADE OF 9" & 13½" BRICK


WHITE & KERNAN HOT BLAST STOVE

F. L. White. Patented Feb. 21, 1905, No. 783,234

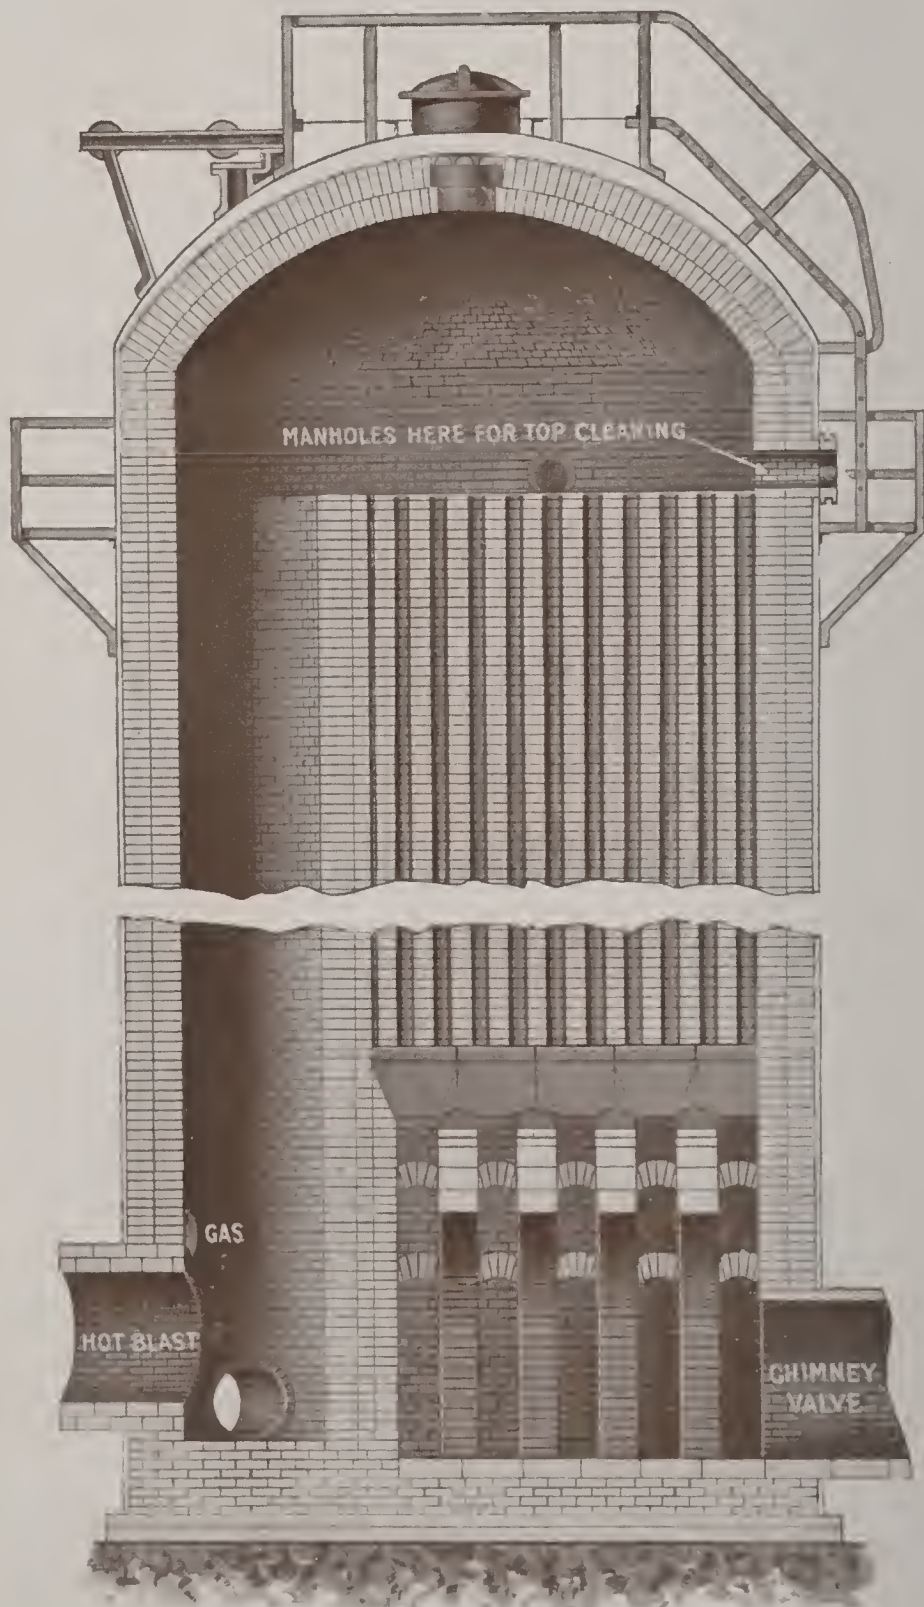

WHITE & KERNAN HOT BLAST STOVE

F. L. White. Patented Feb. 21, 1905, No. 783,234

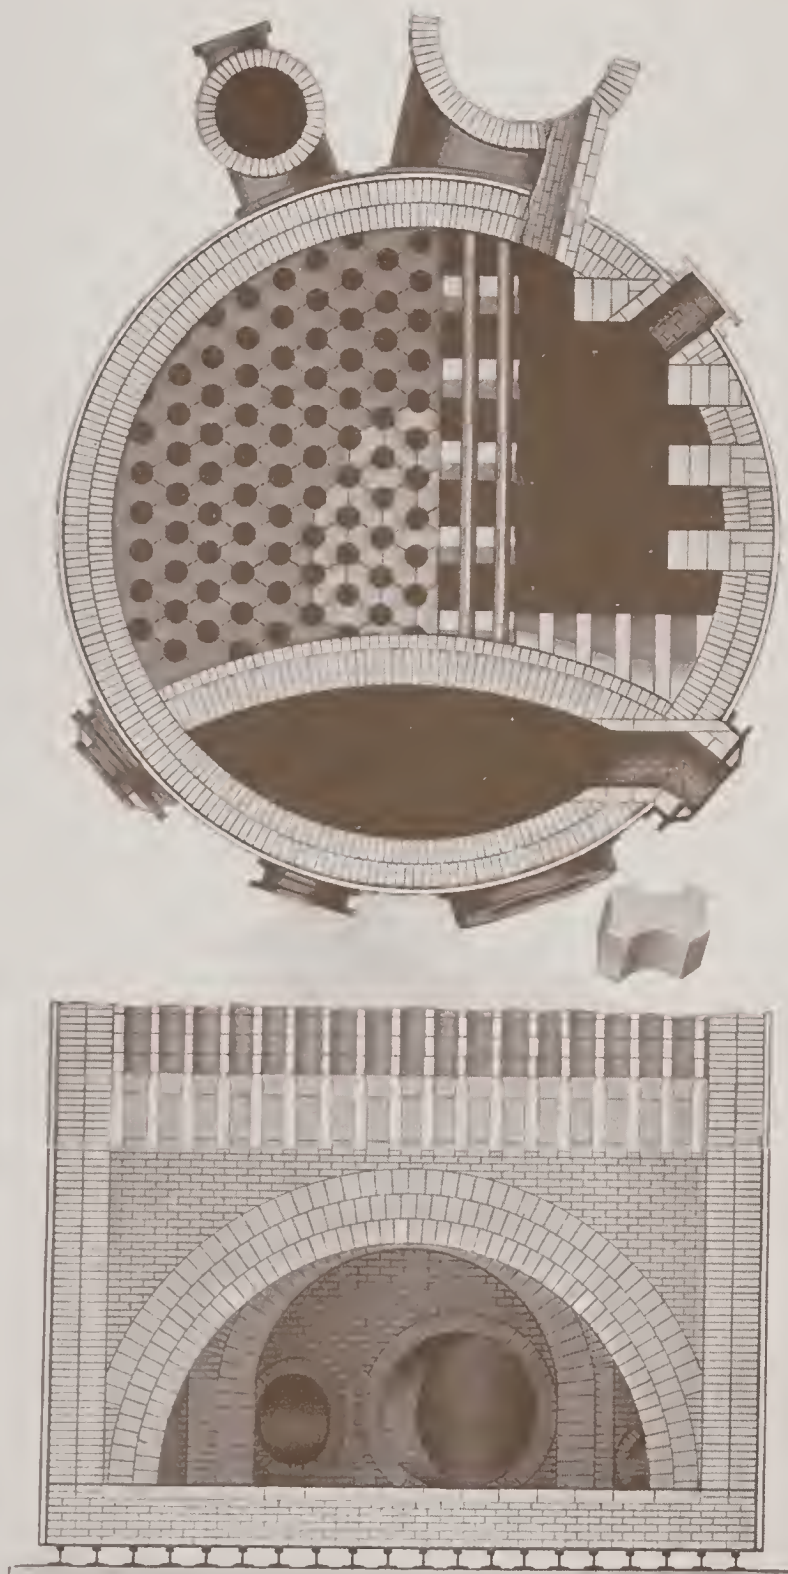



THE NELSON STOVE

Arthur G. McKee, Engineer, Cleveland, O.



THE NELSON STOVE

Arthur G. McKee, Engineer, Cleveland, O.

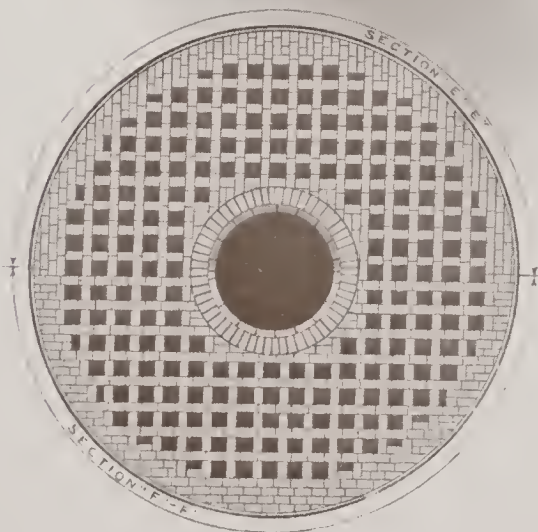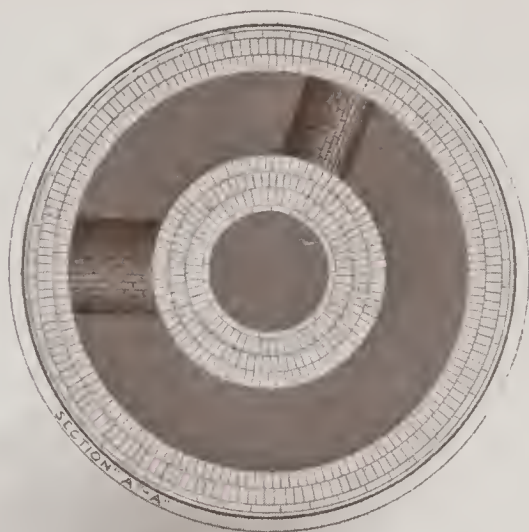

COKE OVEN BRICK

COKE oven construction has changed radically in recent years. Where formerly any cheap clay brick were deemed good enough for the purpose, of late the tendency has been to use the highest grade brick.

The excellent results recently obtained from the use of silica brick in the severe service of by-product ovens, and from the old beehive ovens in the Connellsville region and other districts, have clearly demonstrated that our silica brick are the most economical that can be used in this work, due entirely to the increased length of service obtained by their use.

Our "H-W Crown" lime bond silica brick are made for the crowns of beehive ovens, and in addition to their extreme refractory qualities are especially adapted to hold the crown rigid and true to shape through varying temperatures, making in all a more thorough construction physically than can be obtained by the use of clay brick.


We also manufacture "XX Silica," a lime bond silica brick which is being widely used with the best of results in flues leading from beehive ovens to stacks and also to boilers where waste heat from the ovens is utilized.

The fronts and floor tile are made of fire clay. Trunnel heads are made of either silica or fire clay, as may be desired.


The Longitudinal or Belgian type of coke oven has been coming into favor very rapidly. Having furnished much of the brick that has been made for ovens of this type, we have determined the refractories most suitable for such ovens. See cut for standard coke oven on page 79. Longitudinal oven is shown on page 80.

See pages 81 to 88, inclusive, for description of by-product coke ovens.

STANDARD COKE OVEN
CROSS SECTION

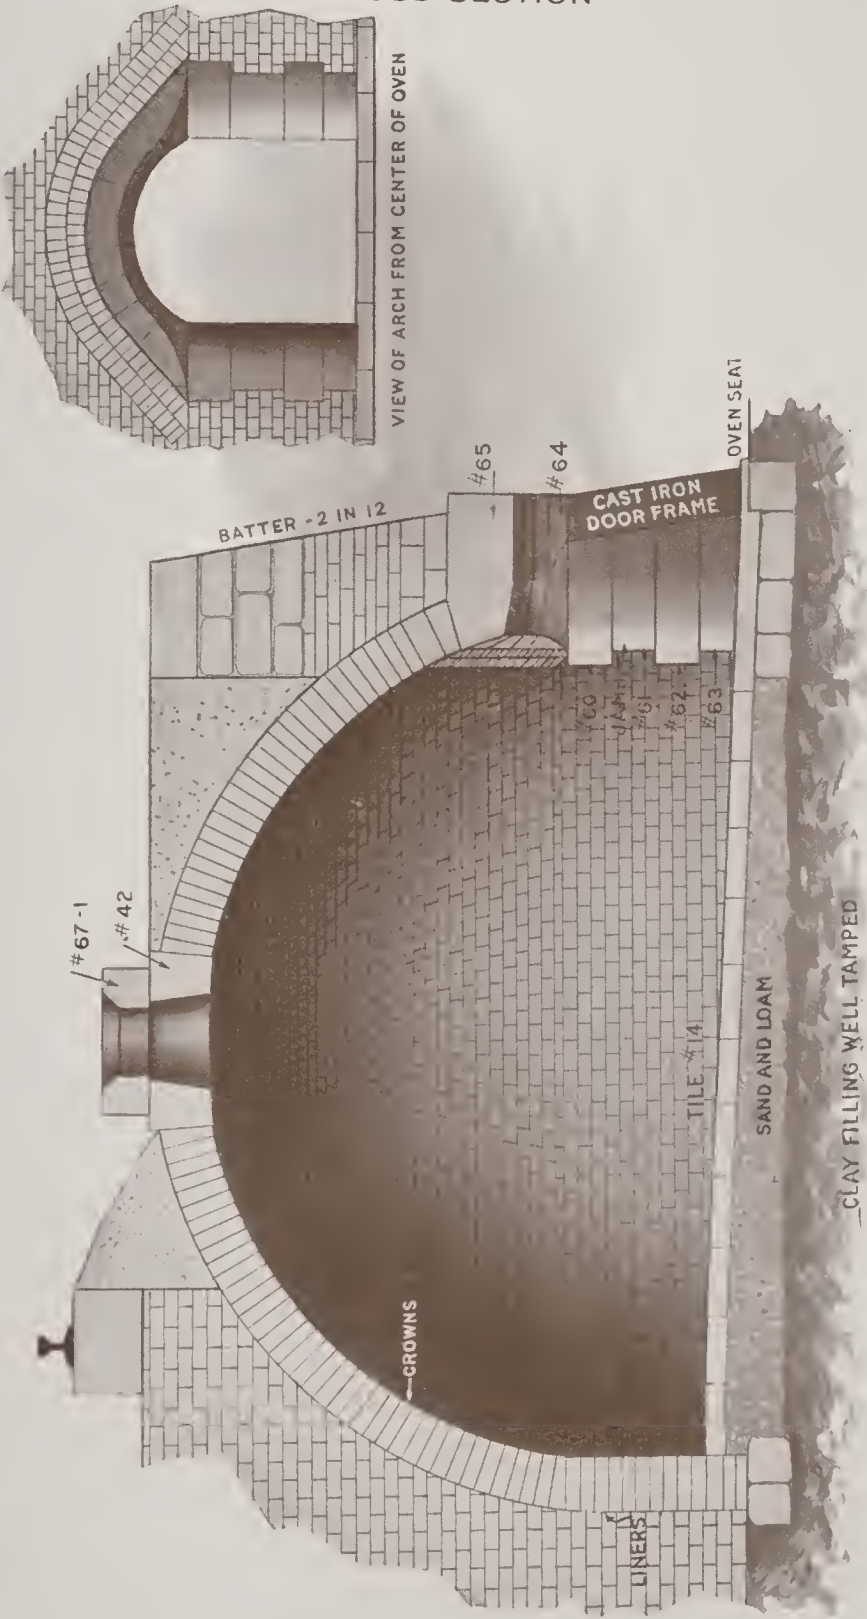


LONGITUDINAL OR BELGIAN OVEN

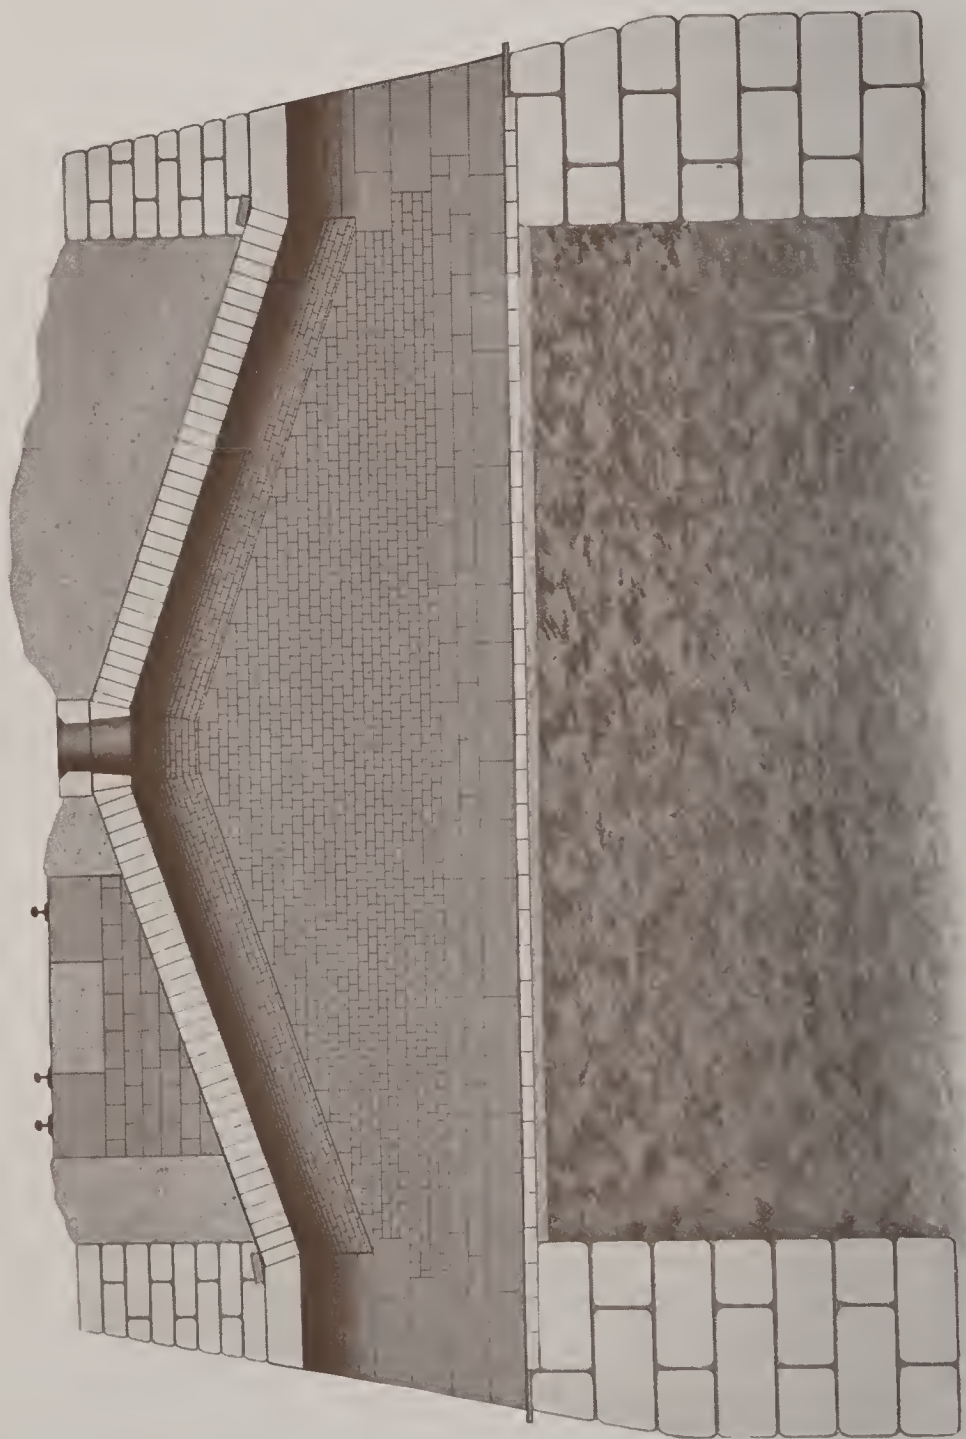

BY-PRODUCT COKE OVENS

COKE was first manufactured on a small scale in the United States about 1850, increasing slowly for a few years, then with great rapidity as the production of iron increased. At this date about 36,000,000 tons are manufactured annually, approximately 15 per cent. of which is made in BY-PRODUCT Ovens. Only BEEHIVE Oven Coke was made until about 1893. The striking increase in the production of BY-PRODUCT Coke is shown by comparing the production in 1897, when it was approximately 262,000 tons, and in 1906, when it was over 4,500,000 tons. We have furnished approximately 85 per cent. of the entire requirements of high grade refractories used in the construction of BY-PRODUCT Ovens in the United States and Canada. When we first went into this business we conducted a long, expensive, and carefully planned series of experiments to determine the proper mixes and methods of manufacturing and burning the various shapes used in BY-PRODUCT Coke Oven construction, and possess at this time more detailed and specific information and records than all of our competitors combined. The fact that we have furnished over

SEMET-SOLVAY CO. TYPICAL SECTIONS OF COKE OVENS

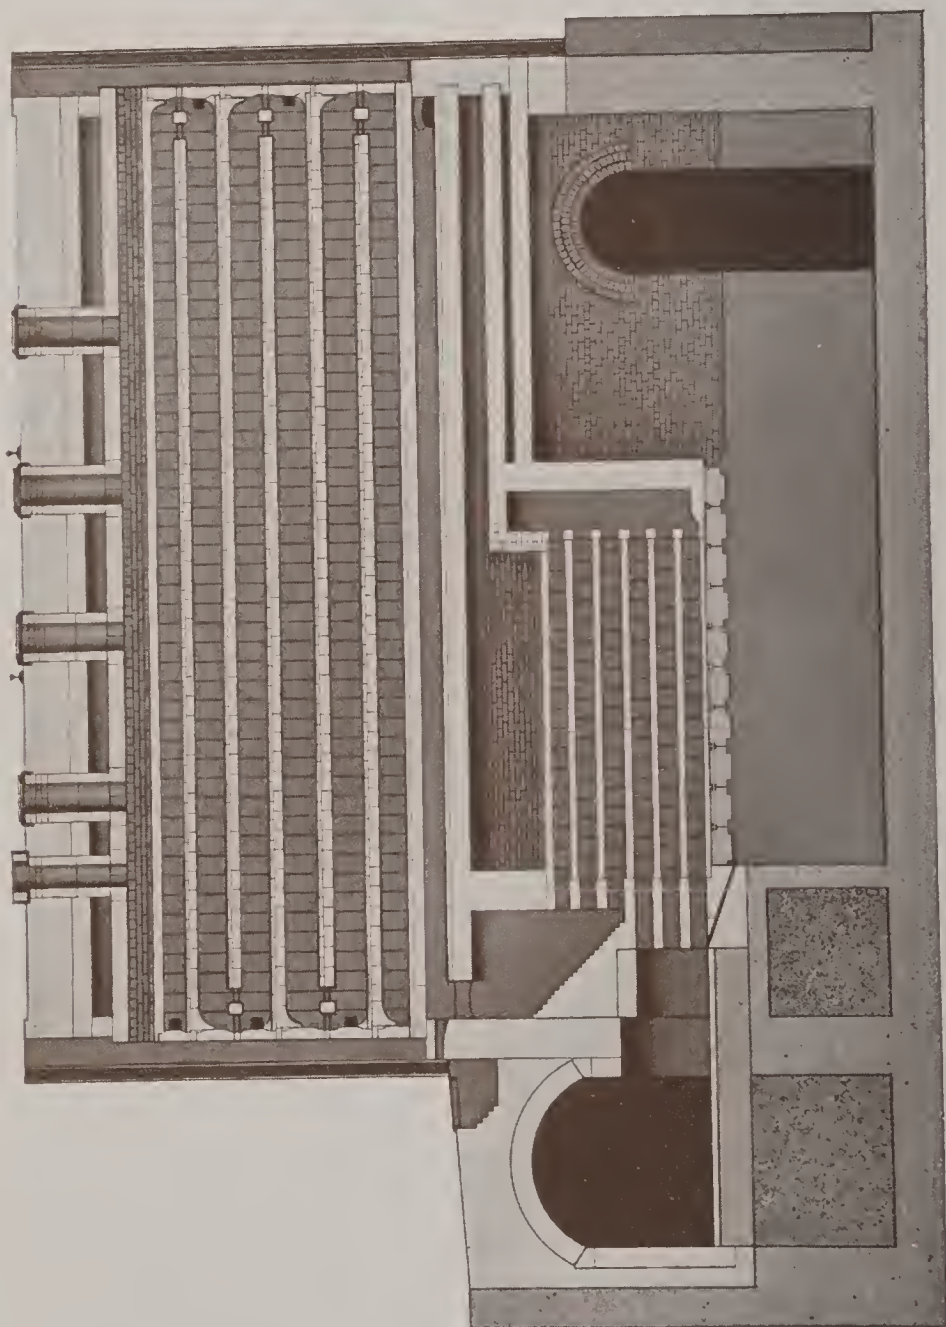


LONGITUDINAL SECTION

SEMET-SOLVAY CO.
TYPICAL SECTIONS OF COKE OVENS



VERTICAL CROSS SECTION


KOPPERS REGENERATIVE COKE OVEN
SEPARATE REGENERATORS FOR EACH OVEN

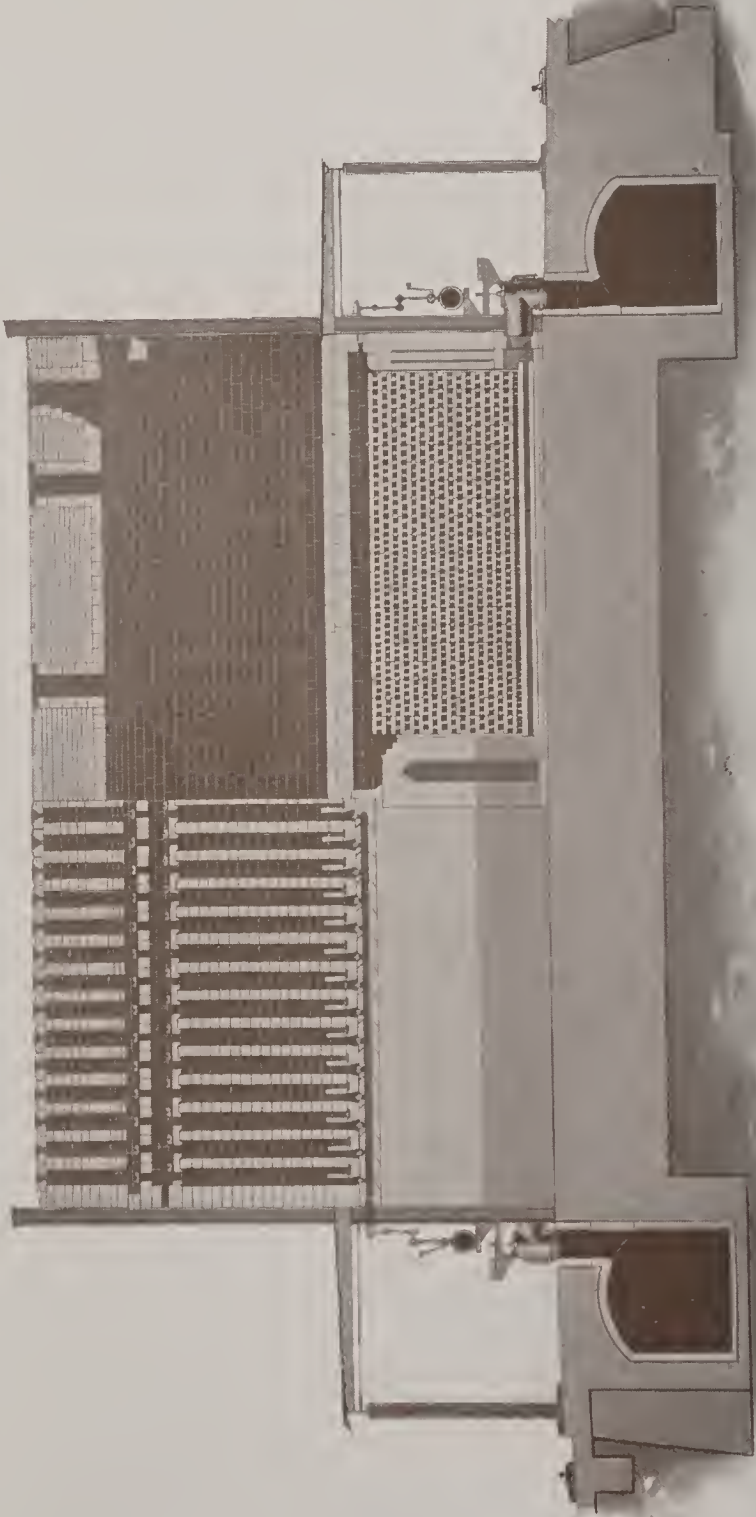


LONGITUDINAL SECTION THRU OVENS AND HEATING FLUES

KOPPERS REGENERATIVE COKE OVEN

SEPARATE REGENERATORS FOR EACH OVEN

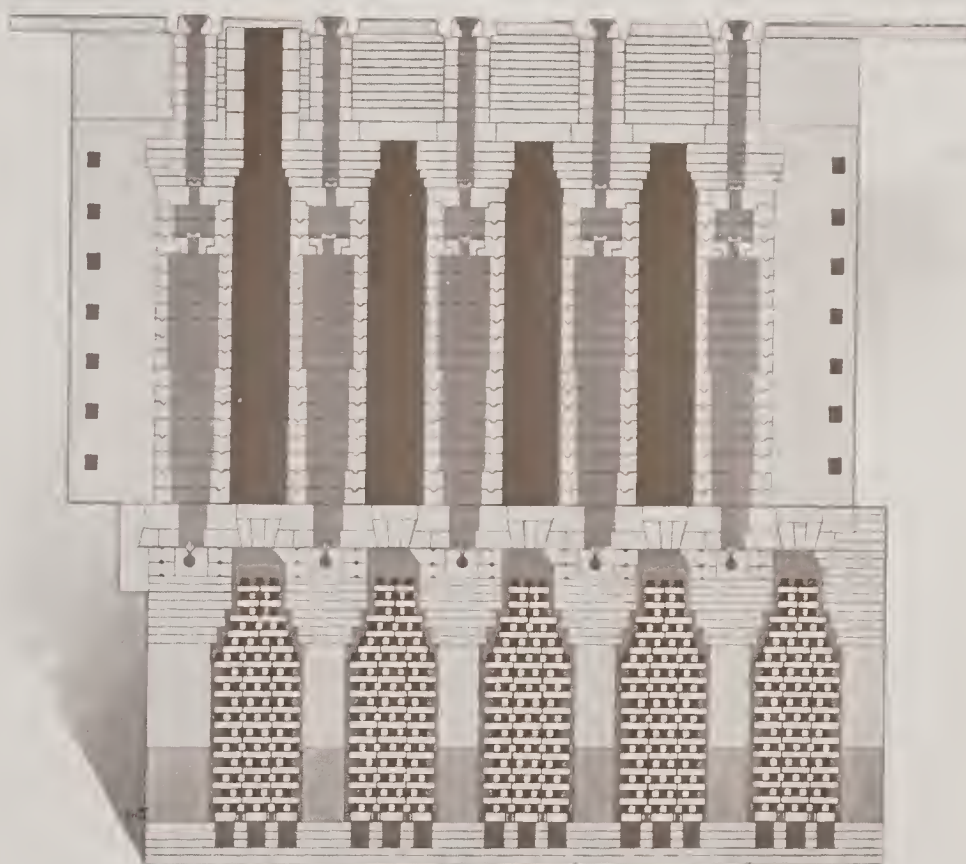


CROSS SECTION THRU OVENS

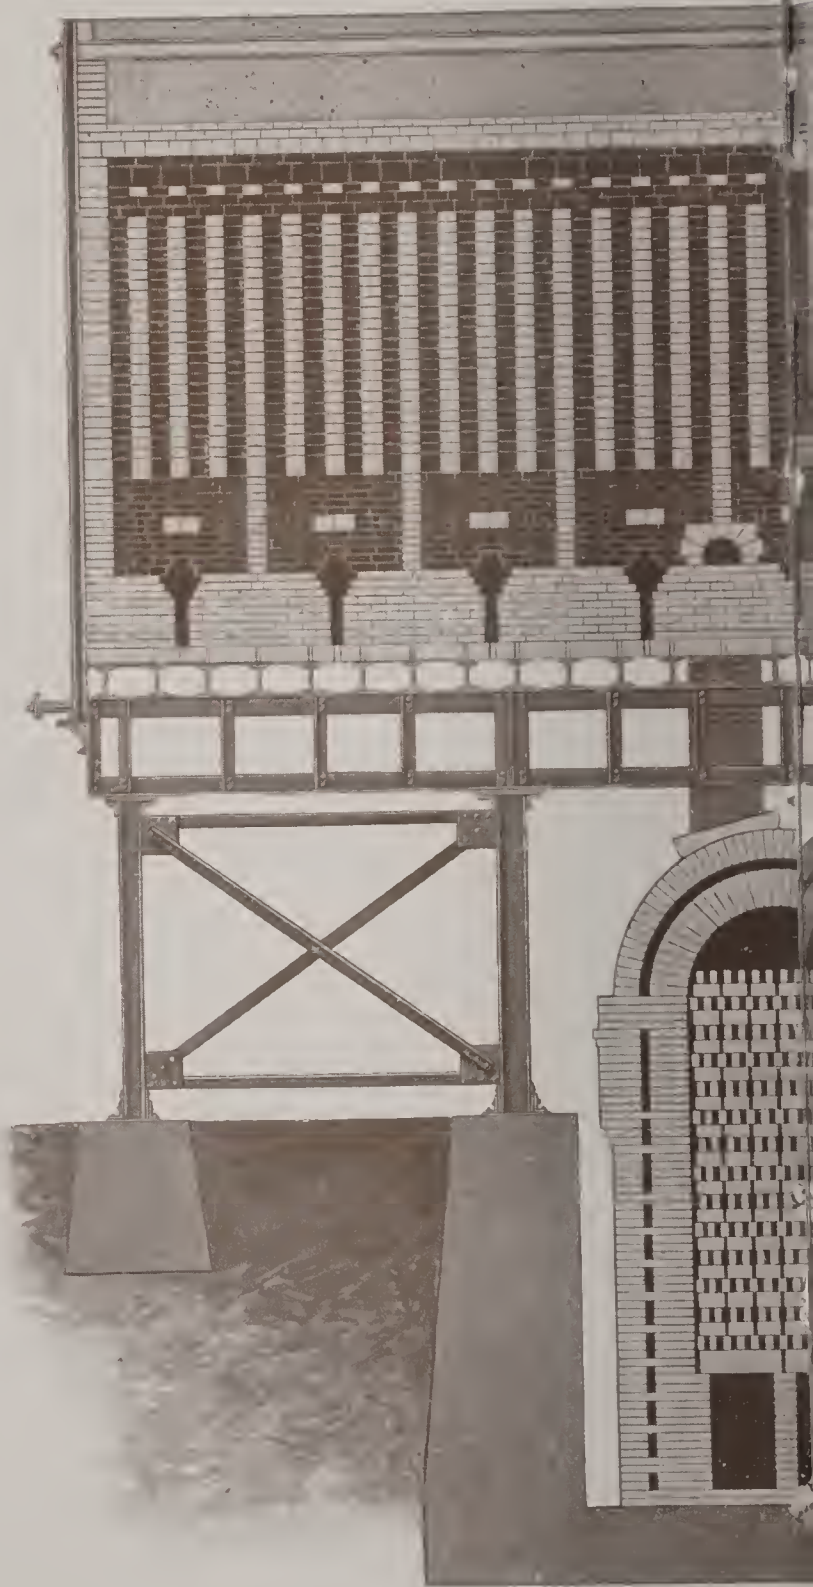

BY-PRODUCT COKE OVEN

United Coke and Gas Company

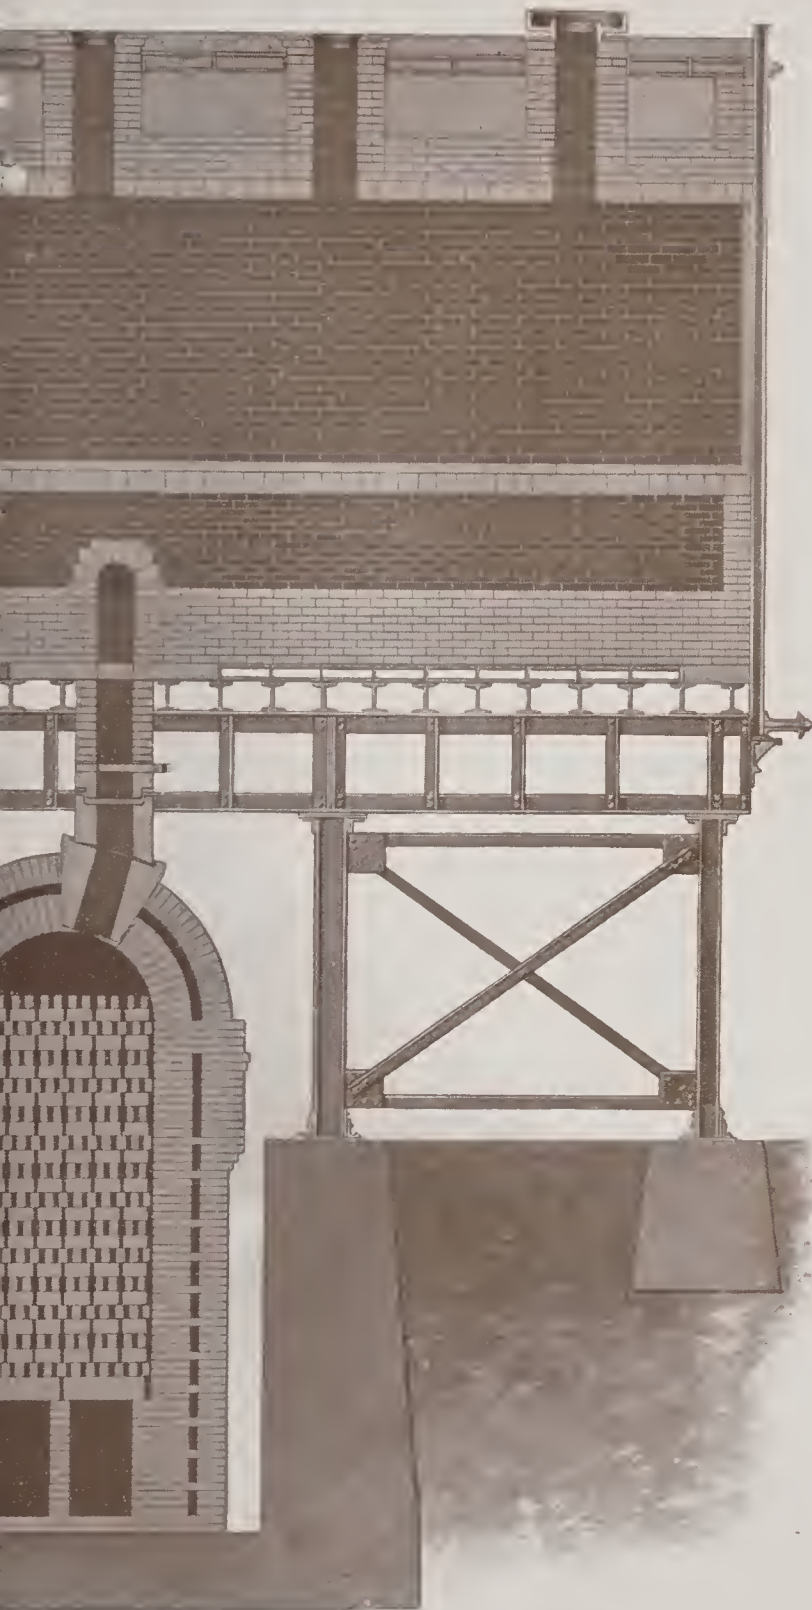

UNITED OTTO SYSTEM

7 Battery Place, New York

85 per cent. of the entire requirements of Brick used in the construction of BY-PRODUCT Ovens is conclusive proof of the quality of our material and the confidence that owners of BY-PRODUCT Plants have in it.

In the Plants first constructed a special Quartzite mix was used in the flues and other portions of the Oven where gas-tight joints were required. In recent construction Silica Brick has supplanted Quartzite Brick, and we have no hesitation in recommending the use of Silica Brick as a material superior to Quartzite Brick for those portions of the Oven where Quartzite, either domestic or imported, was previously employed. Silica Brick and shapes have a slight, uniform, known expansion and when built with the proper allowance for expansion joints, make an extremely durable Oven. Silica Brick are better conductors of heat than Fire Clay Brick. The use of Silica Brick in BY-PRODUCT construction increases the coking capacity of the Oven by decreasing the time required for coking the coal by reason of the greater conductivity of Silica Brick over Fire Clay or Quartzite Brick, and permitting a greater initial heat in the coking chamber.

Illustrations of the various BY-PRODUCT Ovens now in use in the United States are shown on the preceding pages.

MALLEABLE FURNACES


THE question of fire brick is of the utmost importance to managers and owners of Malleable Furnace plants, as in no other type of furnace do brick have to be renewed so frequently, or are brick costs so high per ton of output.

We supply over 75 per cent. of the high grade brick used in malleable furnace bungs, sidewalls and stacks. We have secured and maintained our position against all competitors by using carefully selected high grade clays, care and knowledge in the manufacture of brick, and thorough inspection and selection of the finished product.


We have customers who have bought from us for from fifteen to thirty-three years. Our "WOODLAND," "WIGTON STEEL," "CLEARFIELD," "MUNRO," "MALLEABLE" and "HIGH GRADE" brands are known and used wherever there are Malleable Furnaces.

The cut on page 90 shows one type of Malleable Furnace.


MALLEABLE FURNACE

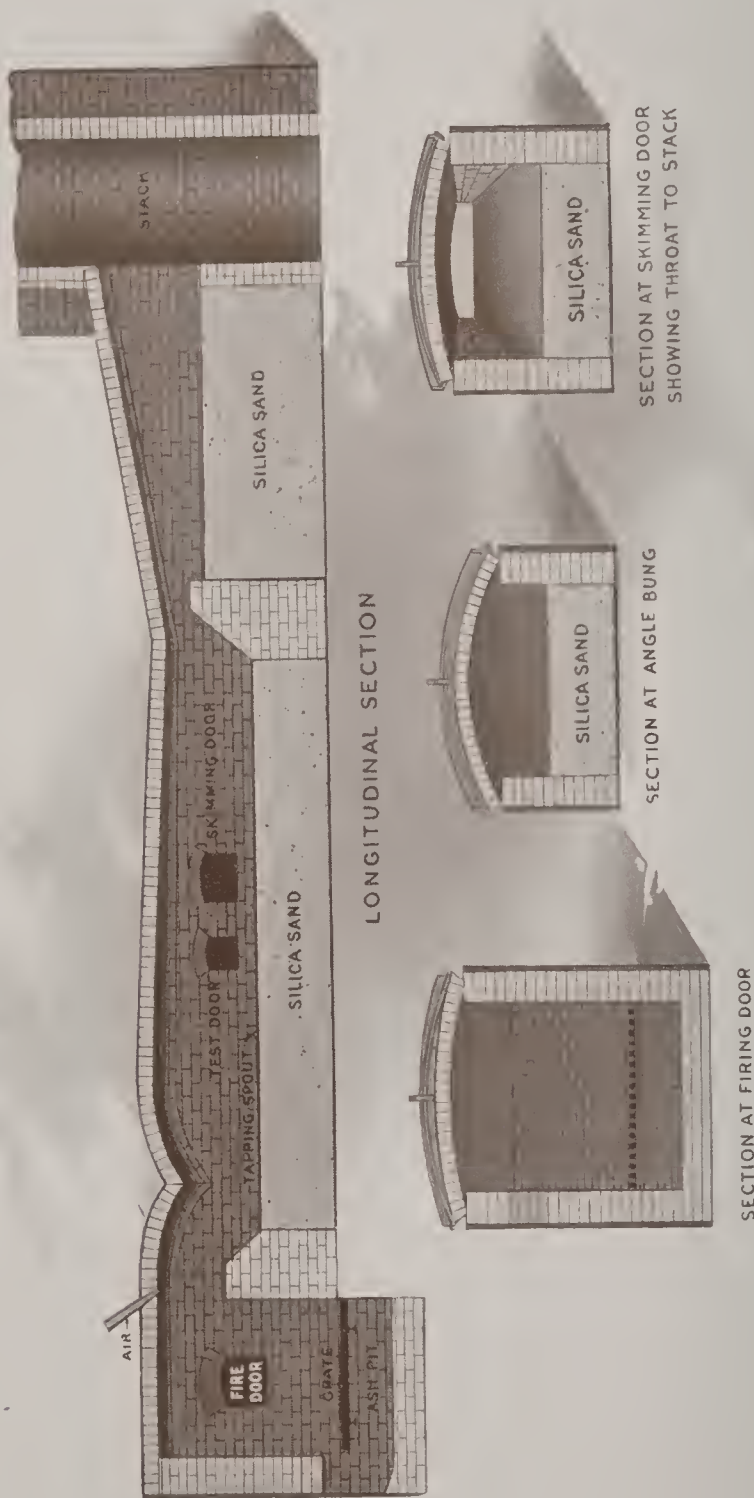

SECTION OF TYPICAL CUPOLA

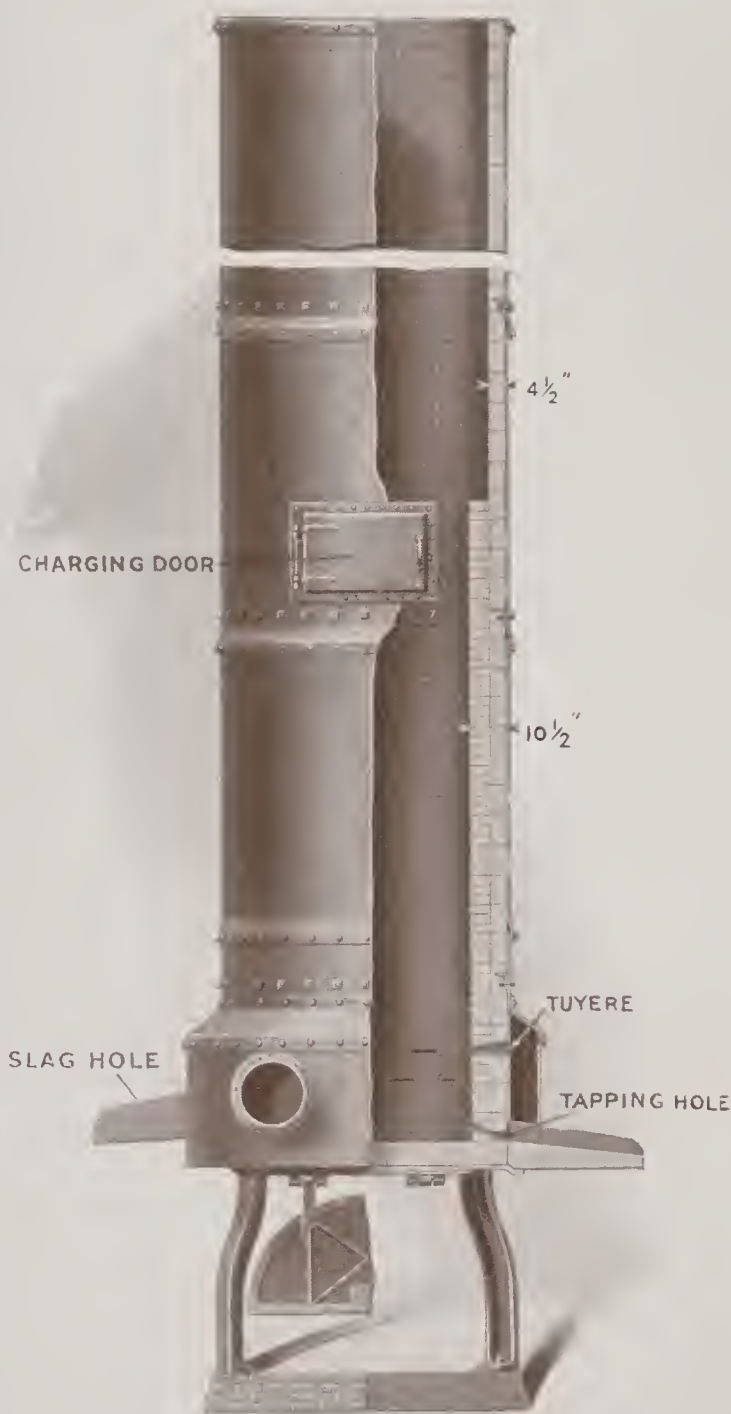


FOUR-HOLE SOAKING PIT FURNACE

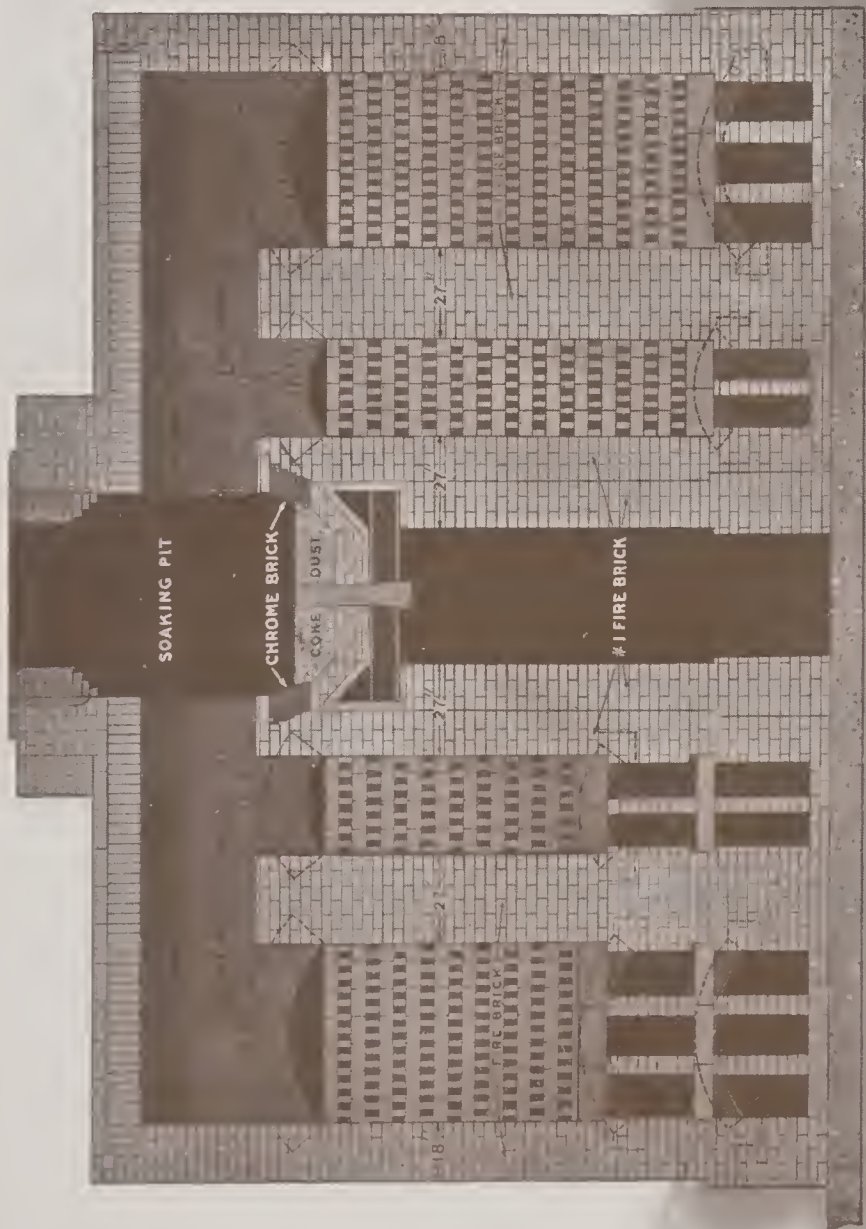

SKETCH OF SOAKING PIT SHOWING USE OF
CHROME BRICK



TYPICAL COAL-FIRED HEATING FURNACE

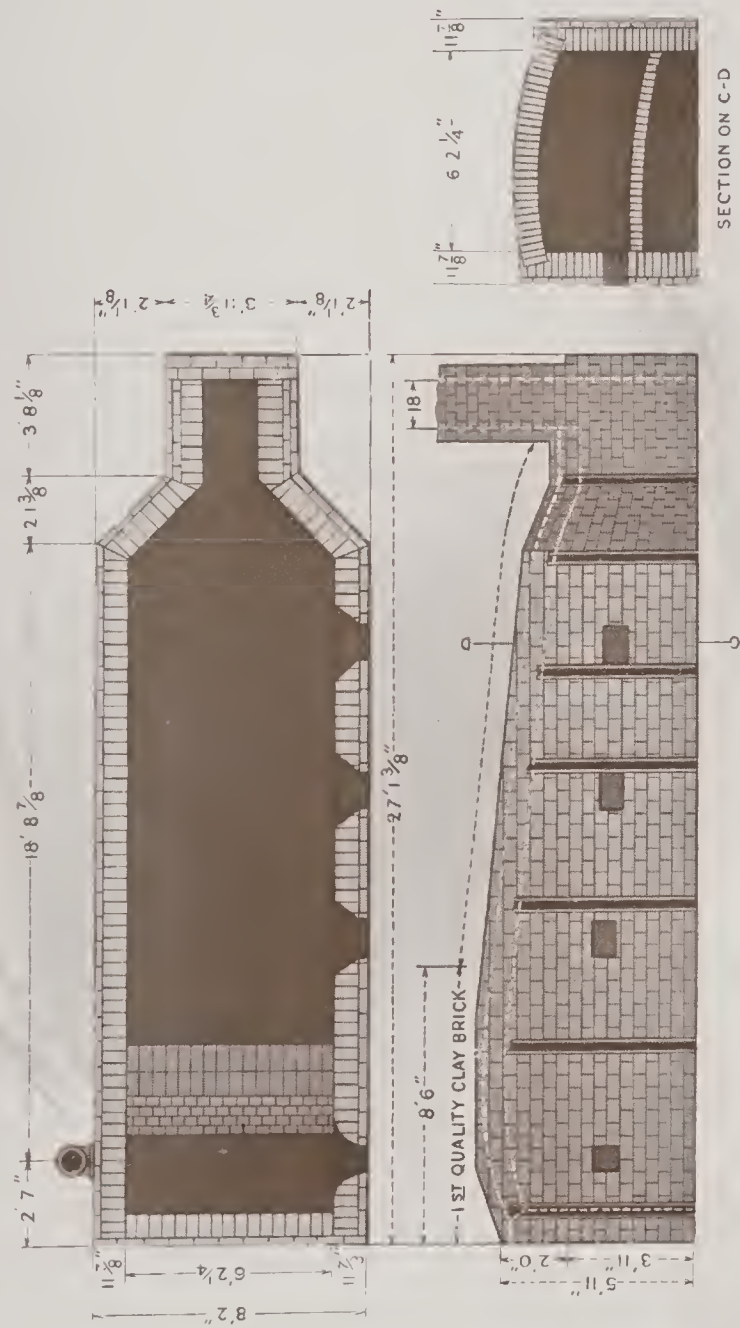

SIEMENS CRUCIBLE STEEL MELTING FURNACE

ON page 97 is a cut of this furnace, showing the shapes of brick commonly used in building it, and on pages 42 and 43 will be found cuts of each special shape indicated in this drawing, all of which we keep in stock.

Our "STAR SILICA" holds an enviable reputation as the best brick in the country for steel melting furnaces. The "WOODLAND" fire brick secured the greater part of this trade when it was first introduced, and held 90 per cent. of it for 25 years, on its merits, until the "STAR SILICA" gradually replaced it. "WOODLAND" brand is still used by some companies who prefer clay brick to silica brick in crucible steel melting furnaces.


LIST OF SHAPES REQUIRED FOR ONE 6-POT FURNACE

Shape No.	No. Pieces	Where Used
A	30 . .	1st and 2d courses in wall
AA	4 . .	Over port openings
B	18 . .	3d course in wall
C	20 . .	4th course in wall
2	6 . .	Between piers
3	12 . .	Pier brick
4	2 . .	On tops of piers
5	2 . .	On tops of piers
6	2 . .	On tops of piers
9-inch straights, 800		

Customers should always order any 9-inch straights needed with these shapes.

We carry the above shapes in "STAR SILICA" and "WOODLAND" brands.

PLAN OF SIEMENS STEEL FURNACE

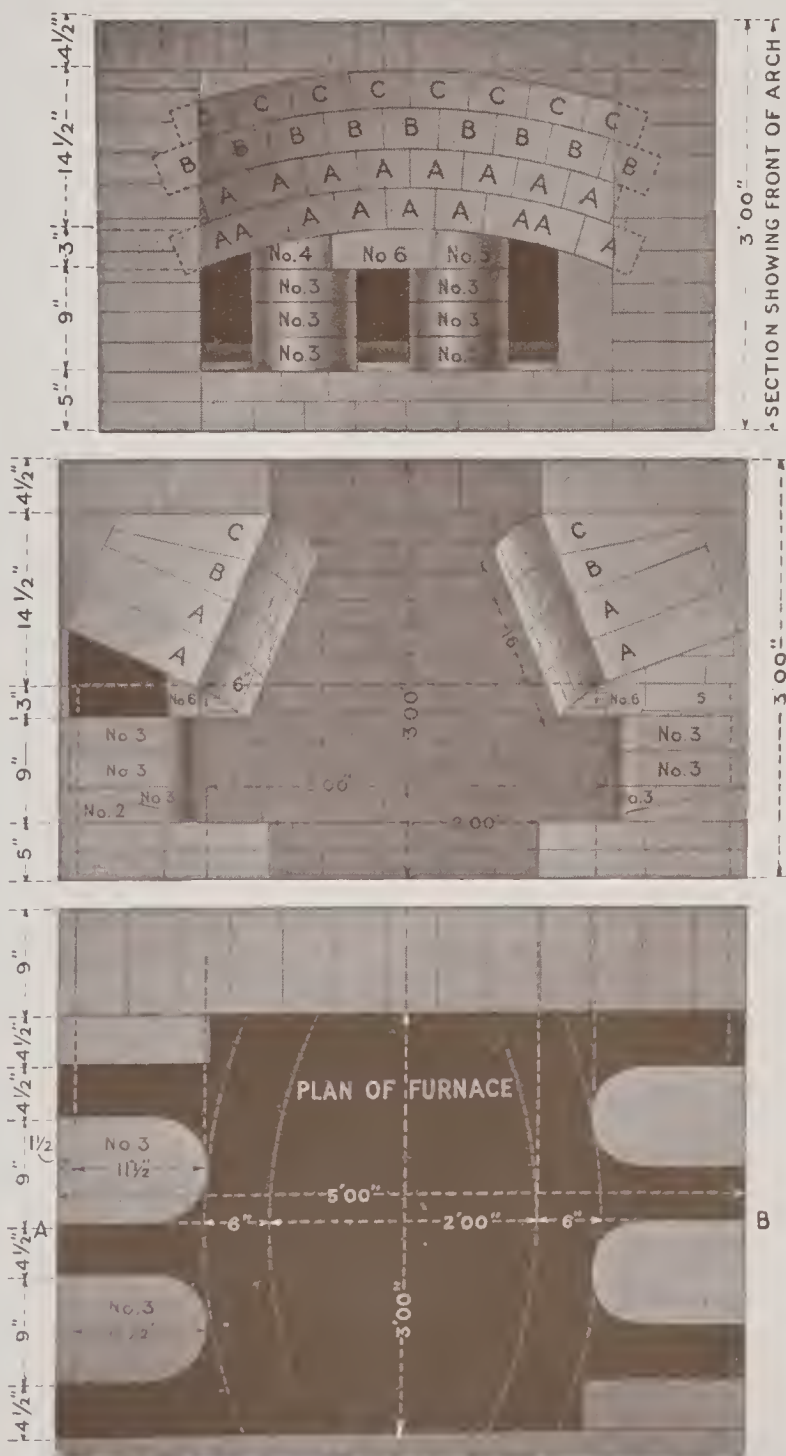

OUR PLAN OF SHAPES
FOR SIEMENS CRUCIBLE STEEL MELTING
FURNACE

ON page 99 will be found a system of shapes for above furnace designed by ourselves. The plan differs from any heretofore used in having the side walls, or walls over the ports built with horizontal joints, thus doing away with the arched side walls.


The advantages are that having all joints or courses of brick horizontal, the side walls are not inclined to pitch into the furnace, as with the old style of shapes; all the shapes extend back to the breast wall, thus making a tight joint the full height of the furnace and preventing the gas from working up between the breast wall and the furnace wall. All of the walls having a straight, solid bearing, the settling will be uniform throughout the furnace, thus avoiding the opening or shattering of the walls by unequal settling. The shapes being of simple pattern, a mason can build a furnace with these shapes in less time than is required with others.

IT REQUIRES THE FOLLOWING SHAPES TO
BUILD ONE SIX-POT HOLE


No. 2	6 pieces
No. 3	12 "
Nos. 7 to 32, inclusive	2 " each
No. 33	4 "
No. 34	4 "
No. 35	4 "
9-inch	800 "

Customers should always order extra as many 9-inch straights as required.



OUR PLAN OF SHAPES FOR SIEMENS CRUCIBLE
STEEL MELTING FURNACE

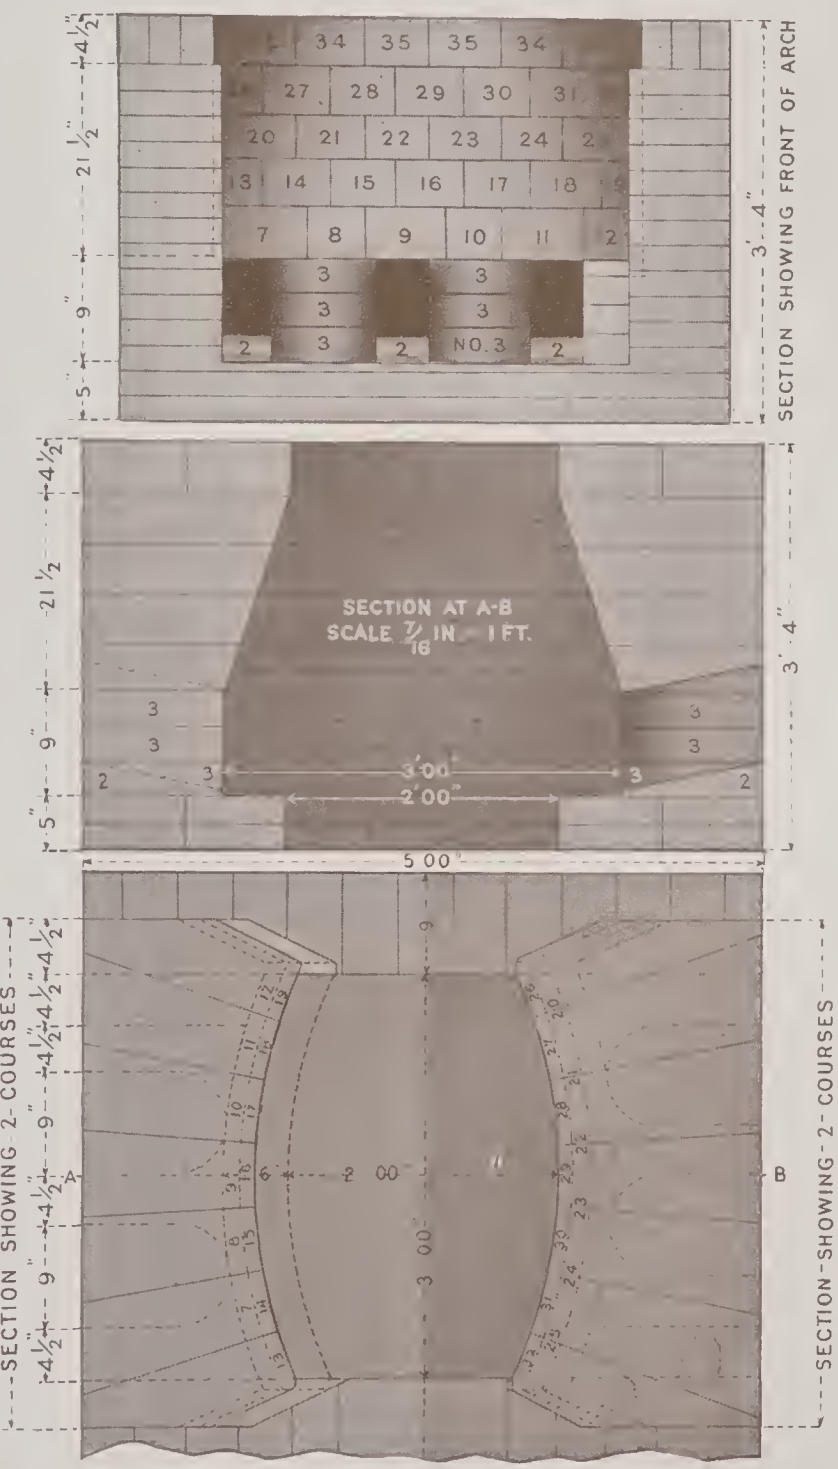

TYPICAL GAS-FIRED HEATING FURNACE

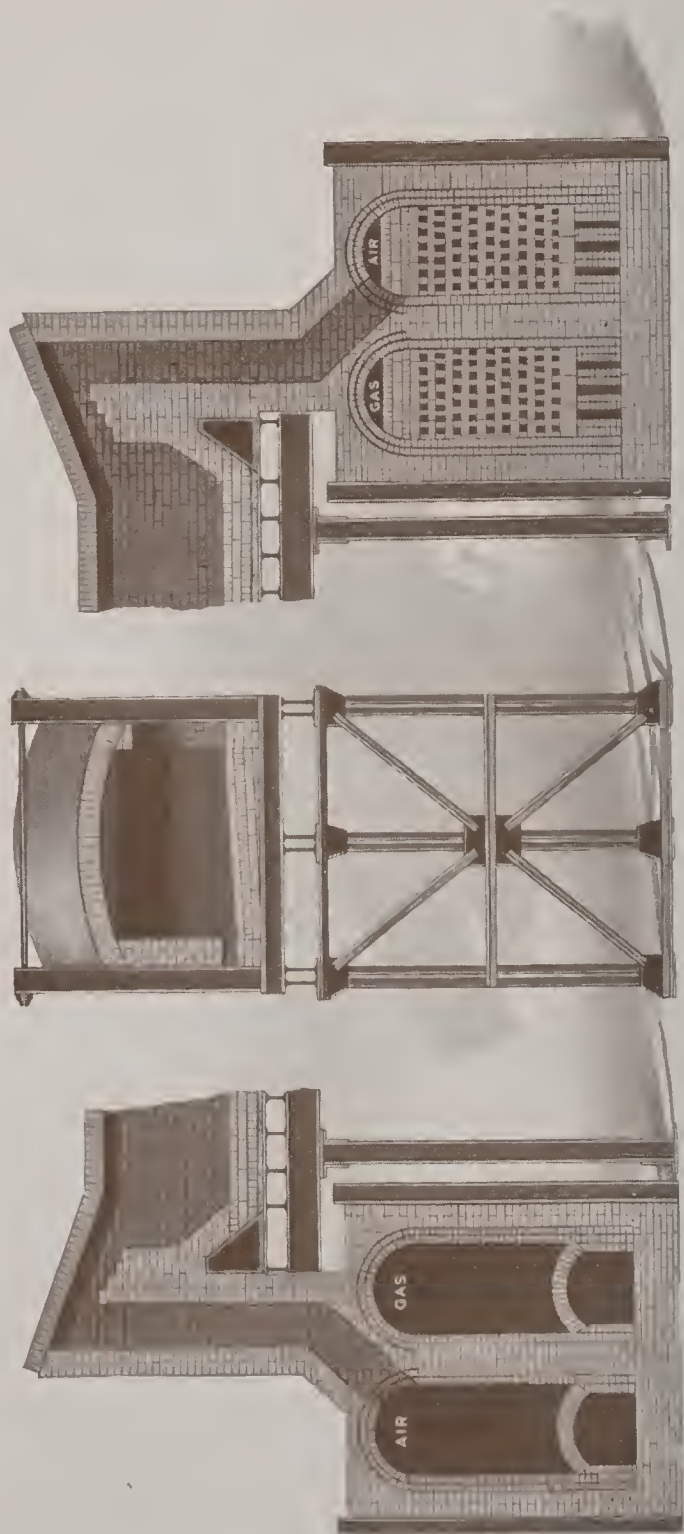

SECTION OF TYPICAL DOUBLE PUDDLING
FURNACE

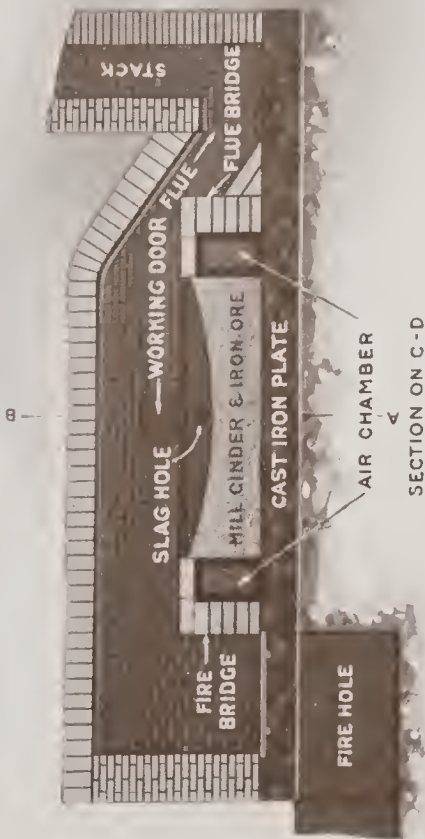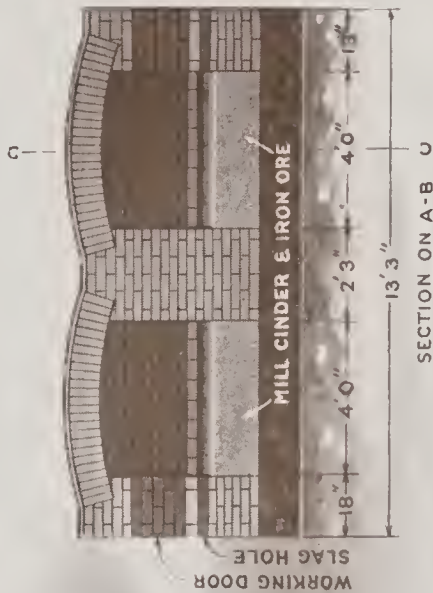

COPPER REVERBERATORIES, CONVERTERS, SETTLERS, ETC.

THE use of the highest grade refractory material is imperative in furnaces smelting and refining copper, because of the severe conditions prevailing in such furnaces.

Practically all of the copper companies in the United States, Canada and Mexico have used large quantities of our "STAR" and "REESE" silica brick, our "WOODLAND," "WIGTON" and other brands of fire-clay brick and "H.-W. R. Co." magnesia and chrome brick.


We manufacture silica brick in 9, 12, 15 and 18-inch sizes, especially adapted for roofs and sidewalls of reverberatories; magnesia and chrome brick and shapes for bottoms, side walls and bridge walls of reverberatories; also shapes for converters and settlers, including tuyere blocks.

We make highest grade fire-clay brick for all purposes.

A cut of a reverberatory furnace is shown on page 103.


A cut of copper converter is shown on page 104.

REVERBERATORY FURNACE FOR COPPER
SMELTING

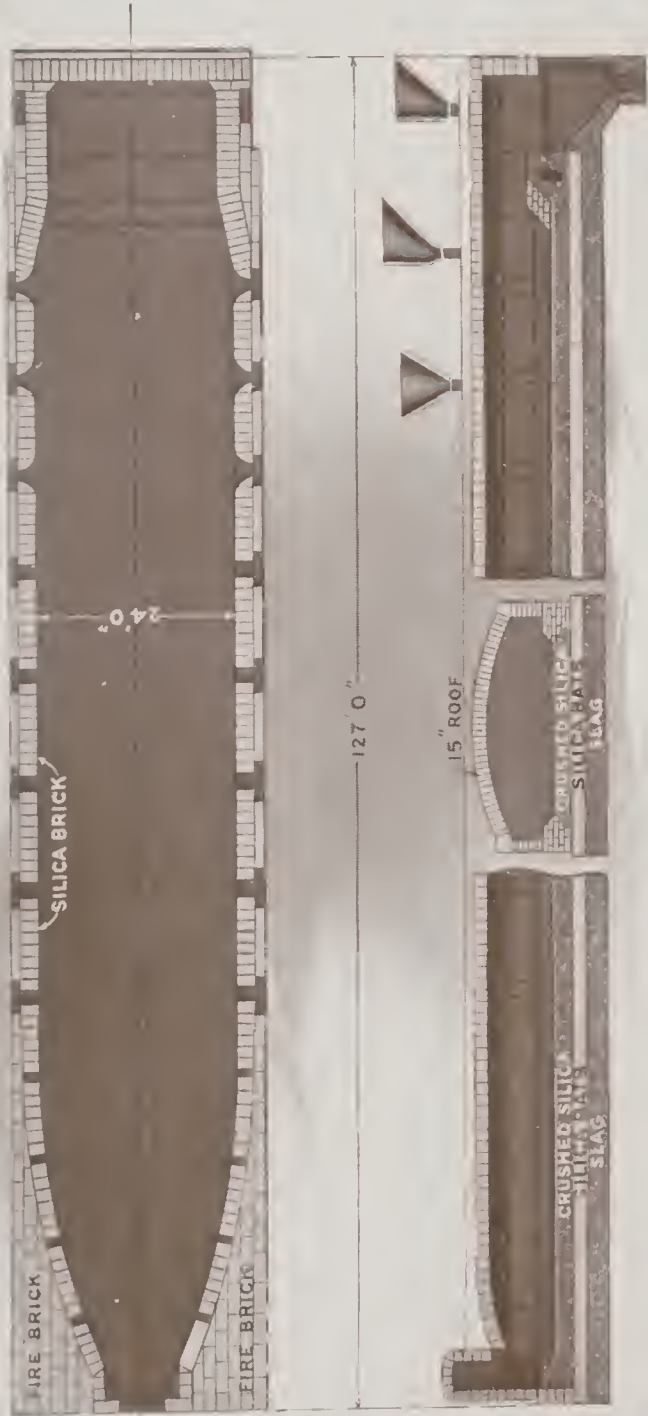


AN INCREASING NUMBER OF REVERBERATORY SMELTING AND REFINING FURNACES
ARE USING MAGNESIA BRICK IN SIDE AND BRIDGE WALLS, AND PUTTING IN
INVERTED BOTTOMS OF MAGNESIA BRICK.

A TYPE OF COPPER CONVERTER

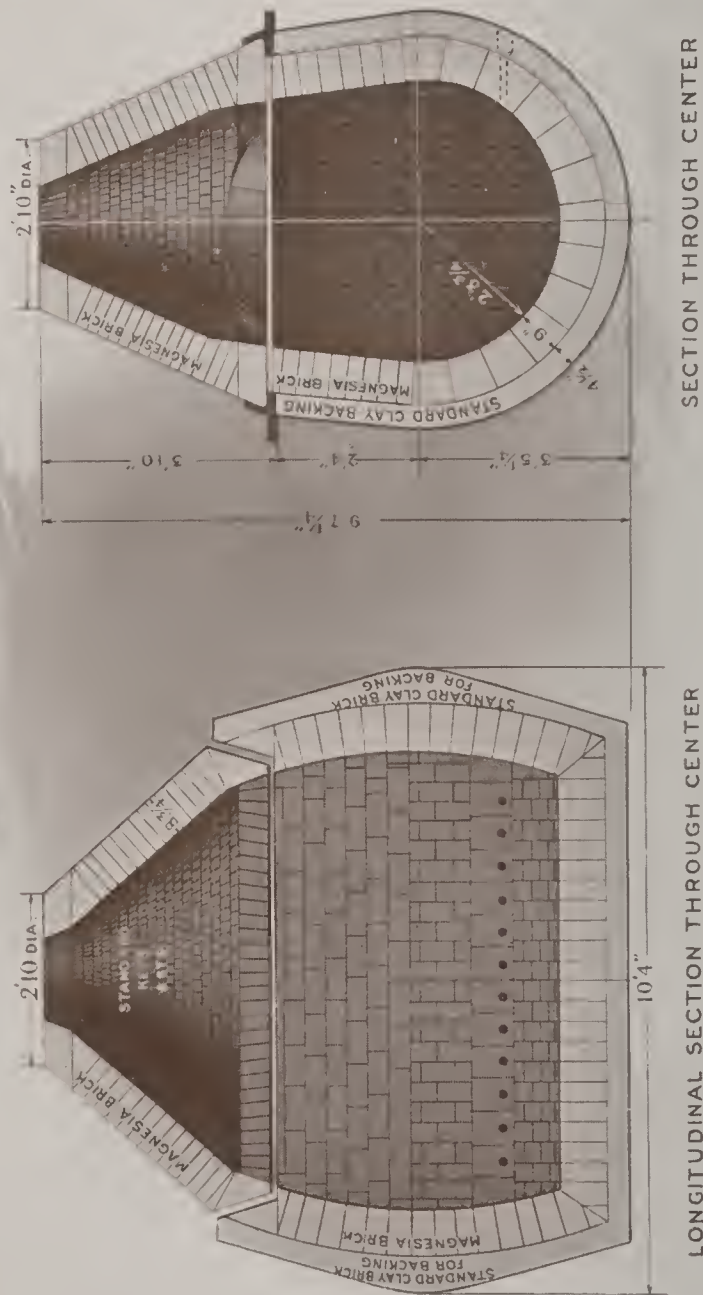


TYPICAL LIME KILN

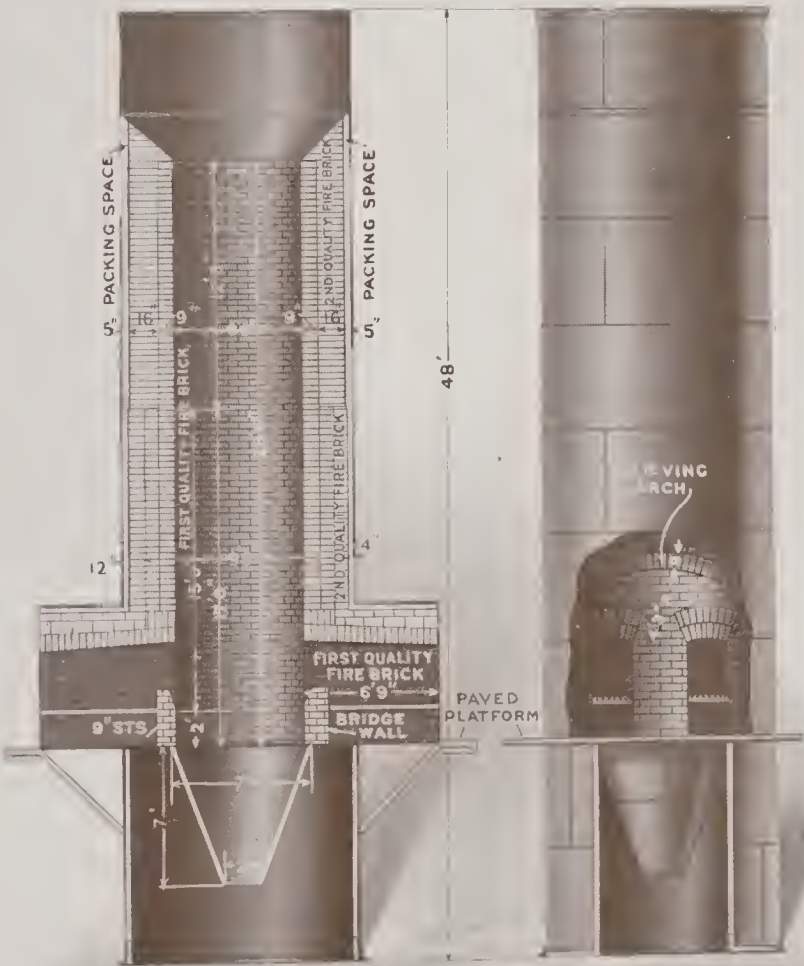

CROSS SECTION OF TYPICAL PRODUCER
GAS GLASS TANK



STANDARD ROTARY CEMENT KILN AND LINING

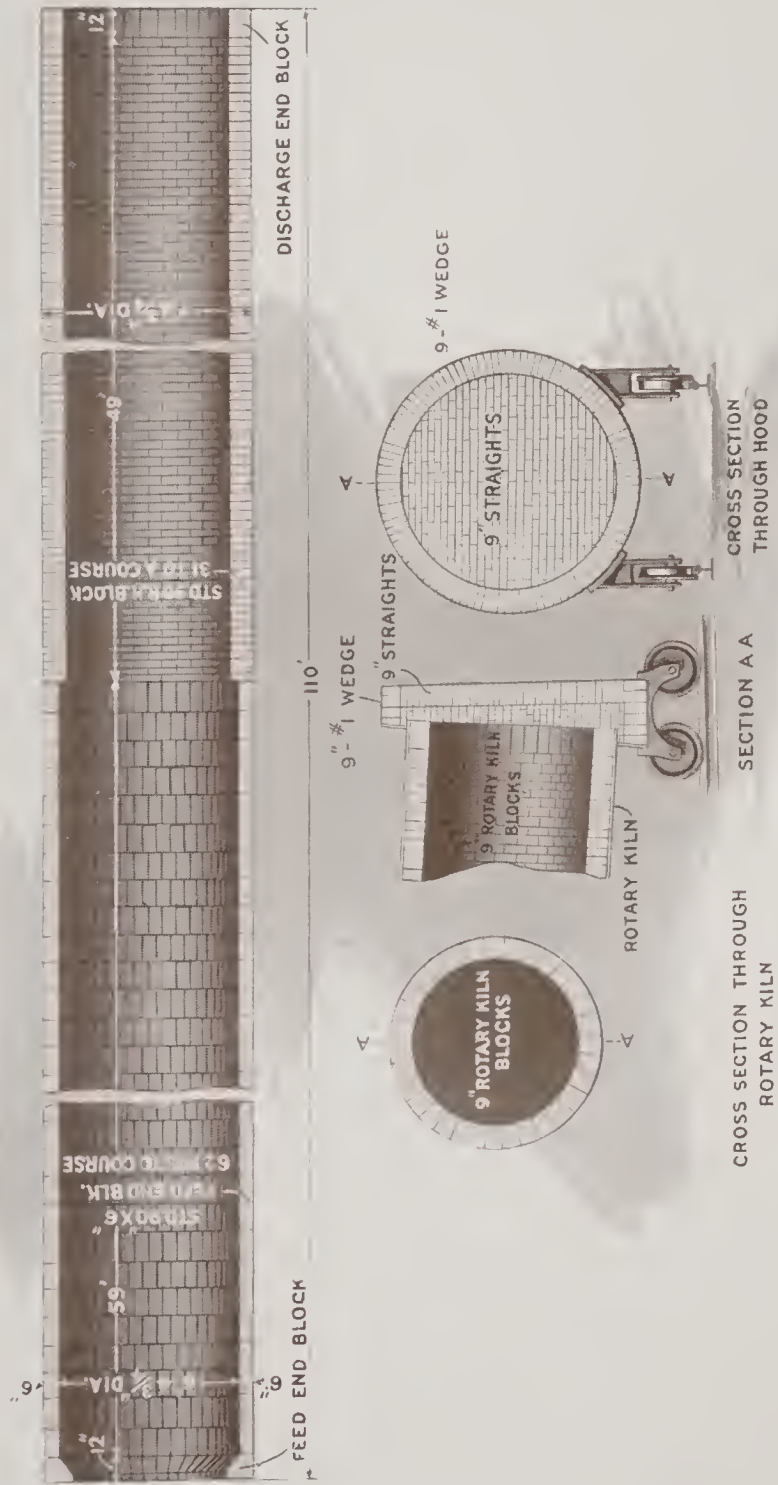

TYPICAL LINING FOR CEMENT KILN HOOD

BOILER SETTINGS

WE make a special feature of manufacturing brick for boiler settings.

The different types of boilers and the different fuels in use require varied properties in the brick used in different sections of the brickwork; in some cases the best brick to use depends entirely upon the heat-resisting quality; in others, upon resistance to the impinging action of flame and spawling; while in others, upon the ability to resist the action of clinker and poker, together with heat-resisting qualities.

The large units of the modern boiler, such as the Sterling, Babcock & Wilcox, Cahall, Heine, Wickes, Rust, Maxim and other types, require the best possible grade of brick in the setting, ESPECIALLY IN THE ARCHES.


In boiler setting, it is important that the workmanship and material be such that interruptions in the steam supply occur as seldom as possible.

Numerous changes have been made in boiler settings at our suggestion, particularly with regard to the kind of brick used at critical points. These changes were followed with marked improvement in the steam records of the boiler plants.


Whenever called upon to do so, we will have our engineering department get out blueprints and counts, showing the number and most suitable brick required for different sections of the furnace walls for any type of boiler.

Different types of boiler settings are shown on pages 109 to 119 inclusive.


TYPICAL RETURN TUBULAR BOILER
LONGITUDINAL SECTIONAL ELEVATION

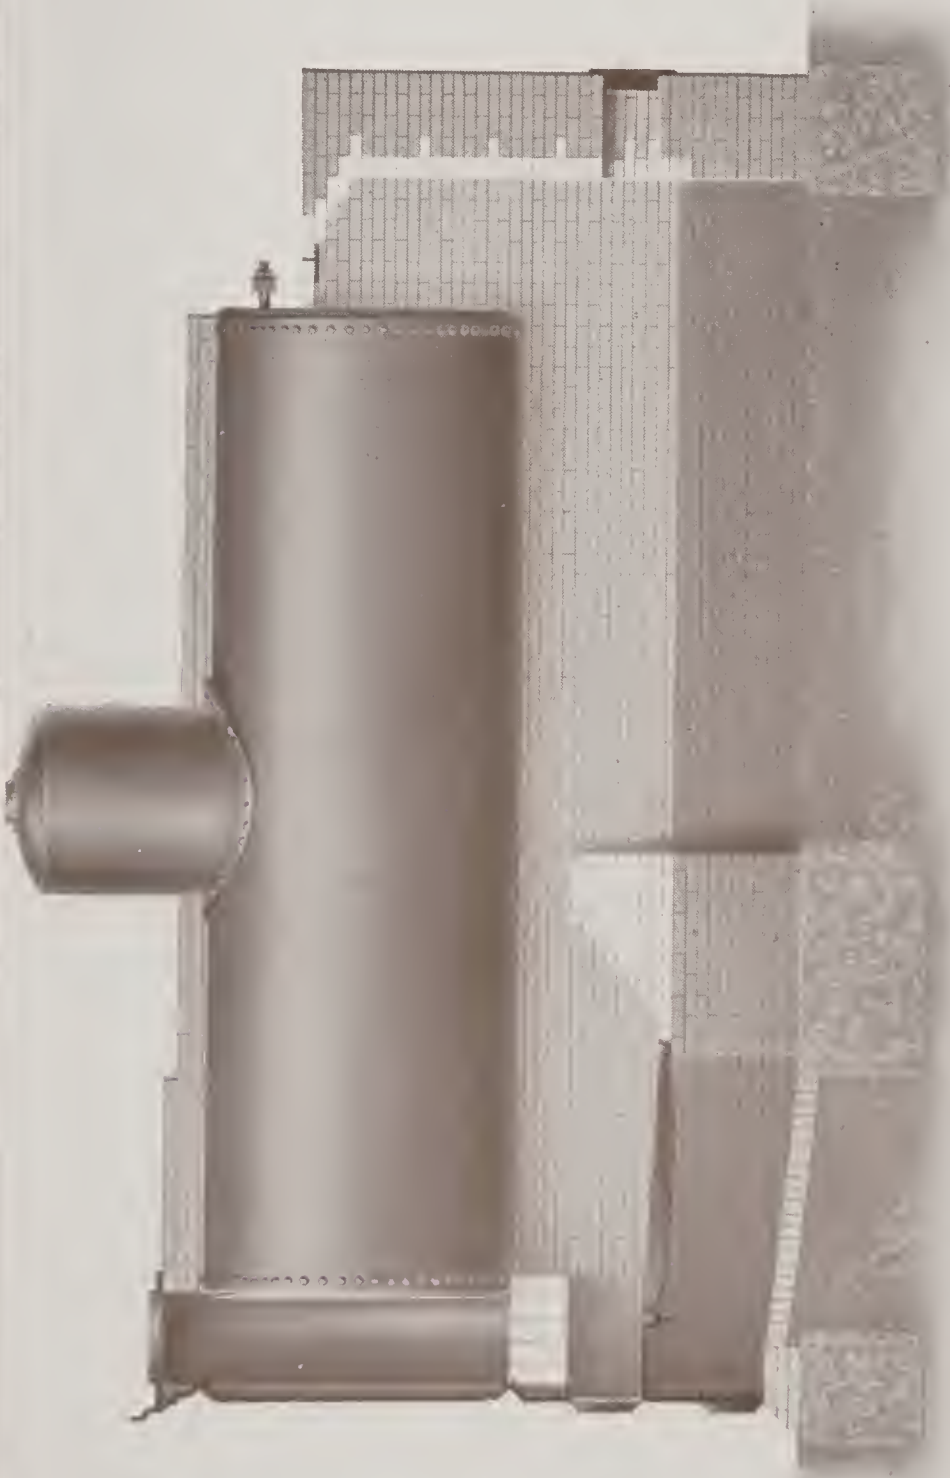


TYPICAL RETURN TUBULAR BOILER
SECTION THROUGH FURNACE

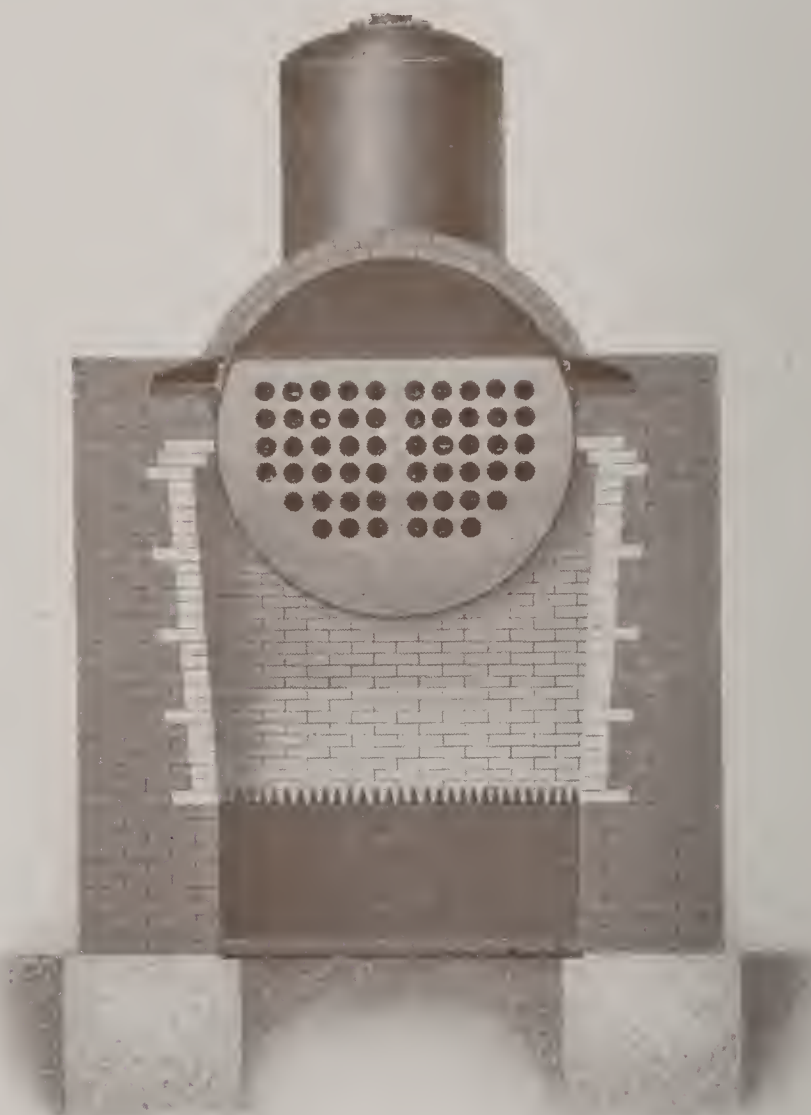


BABCOCK & WILCOX WATER TUBE BOILER

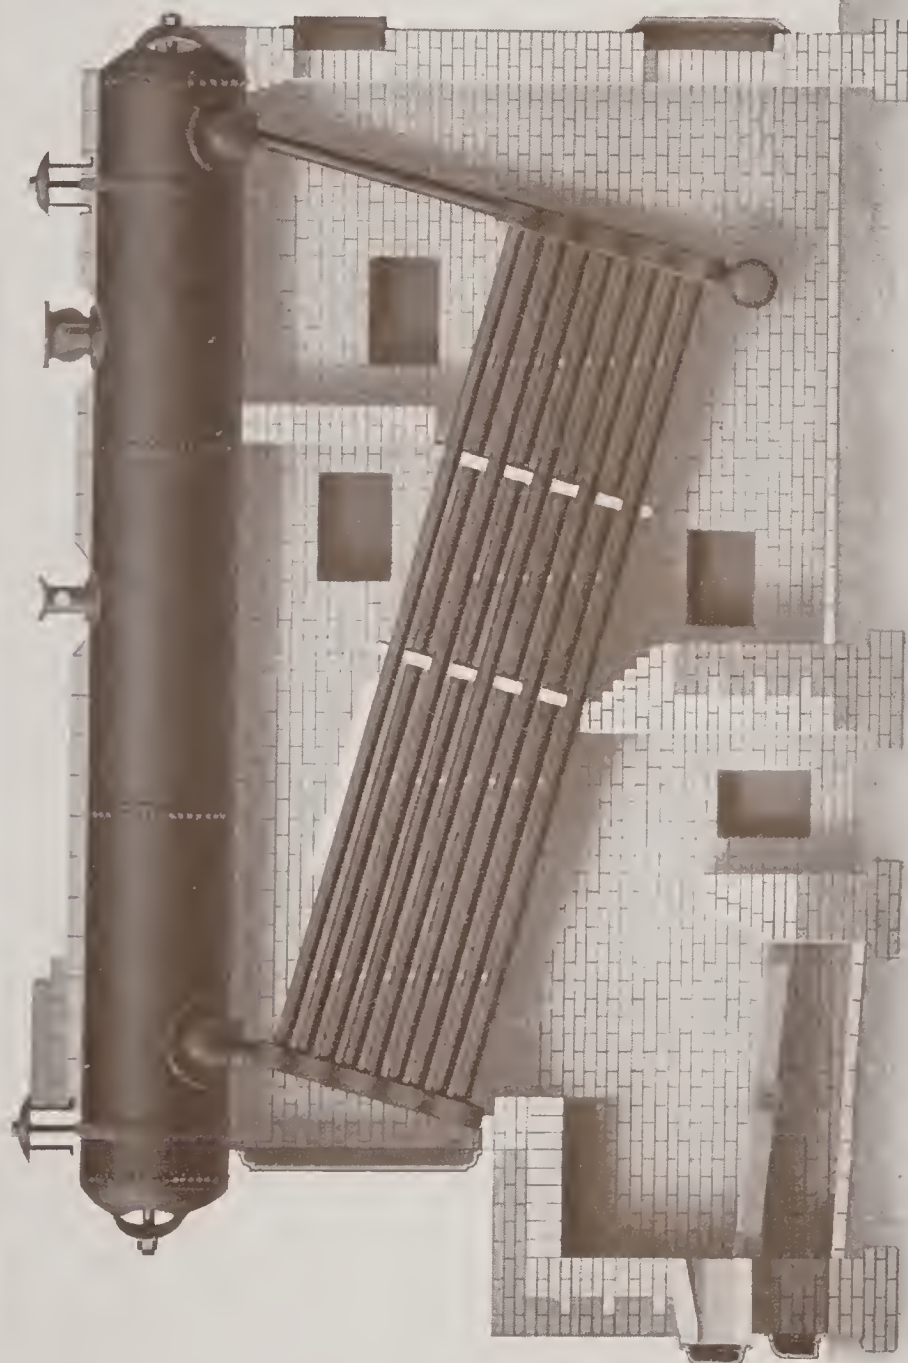


CAHALL VERTICAL WATER TUBE BOILER

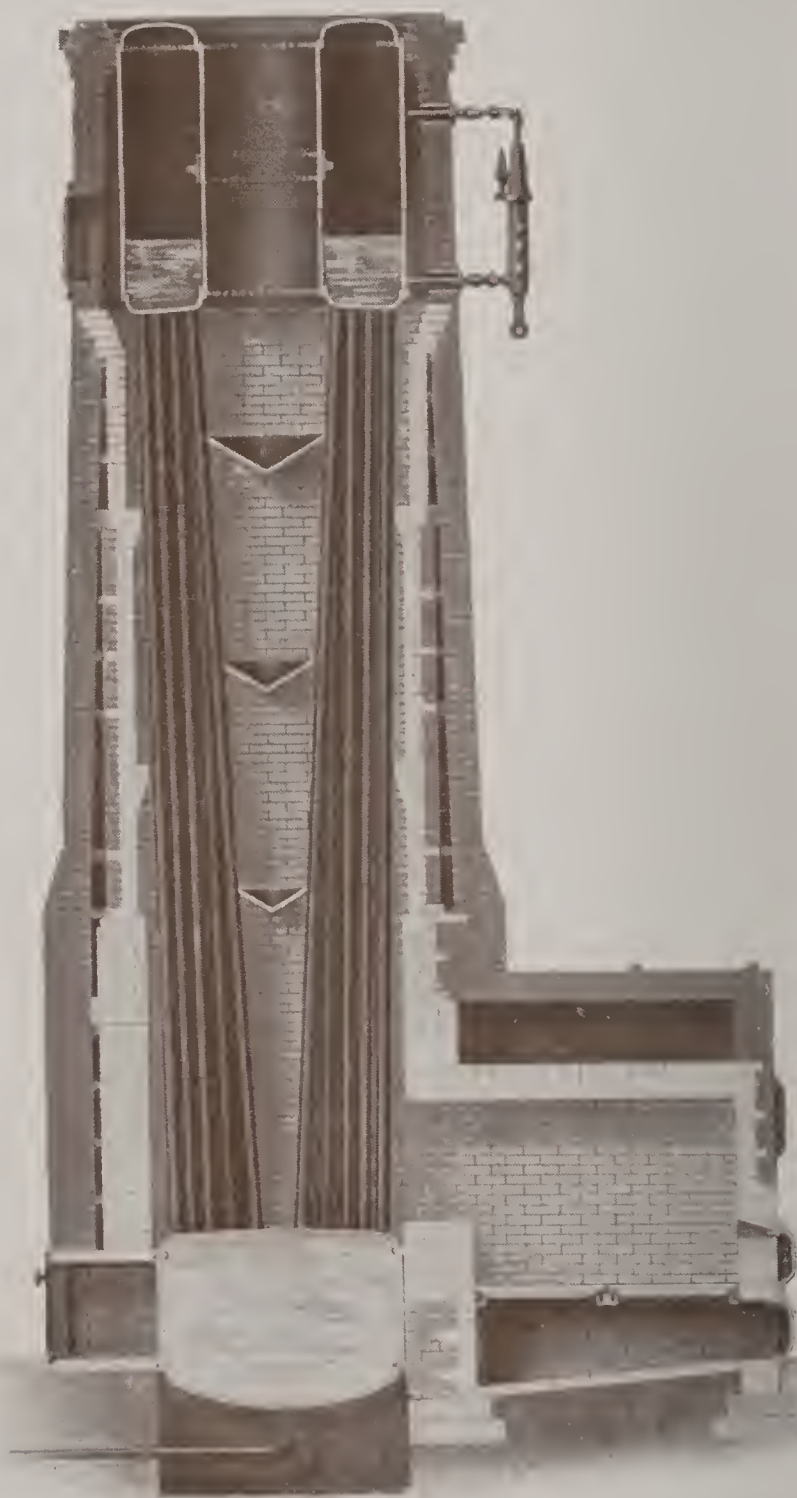


STERLING WATER TUBE BOILER

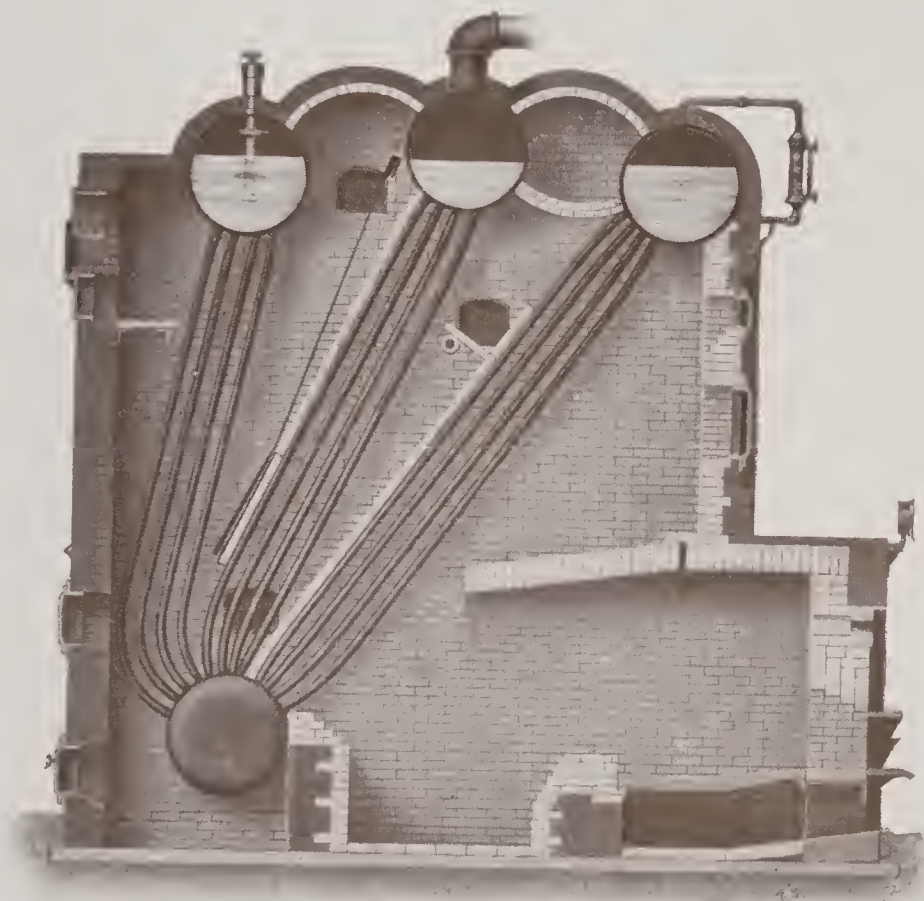


HEINE HORIZONTAL WATER TUBE BOILER

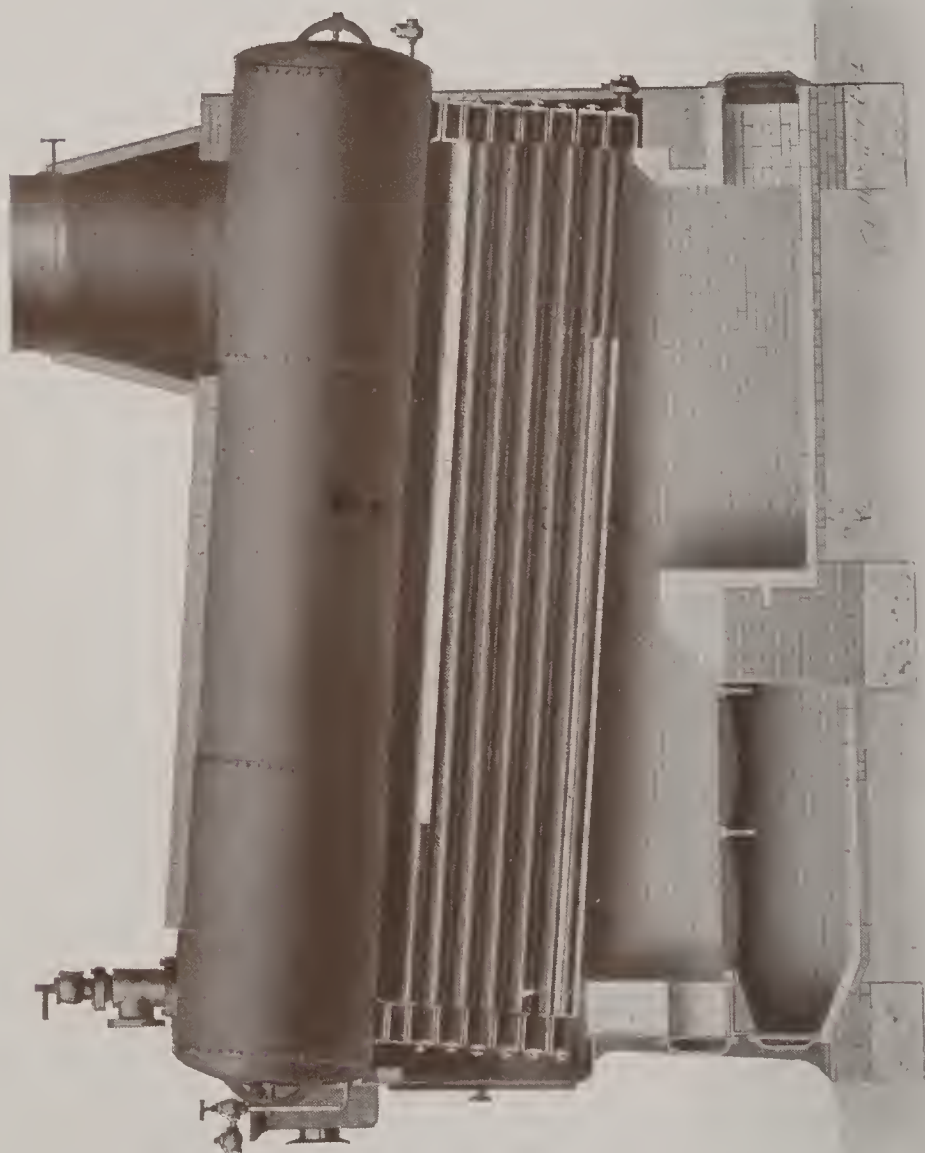


MAXIM WATER TUBE BOILER

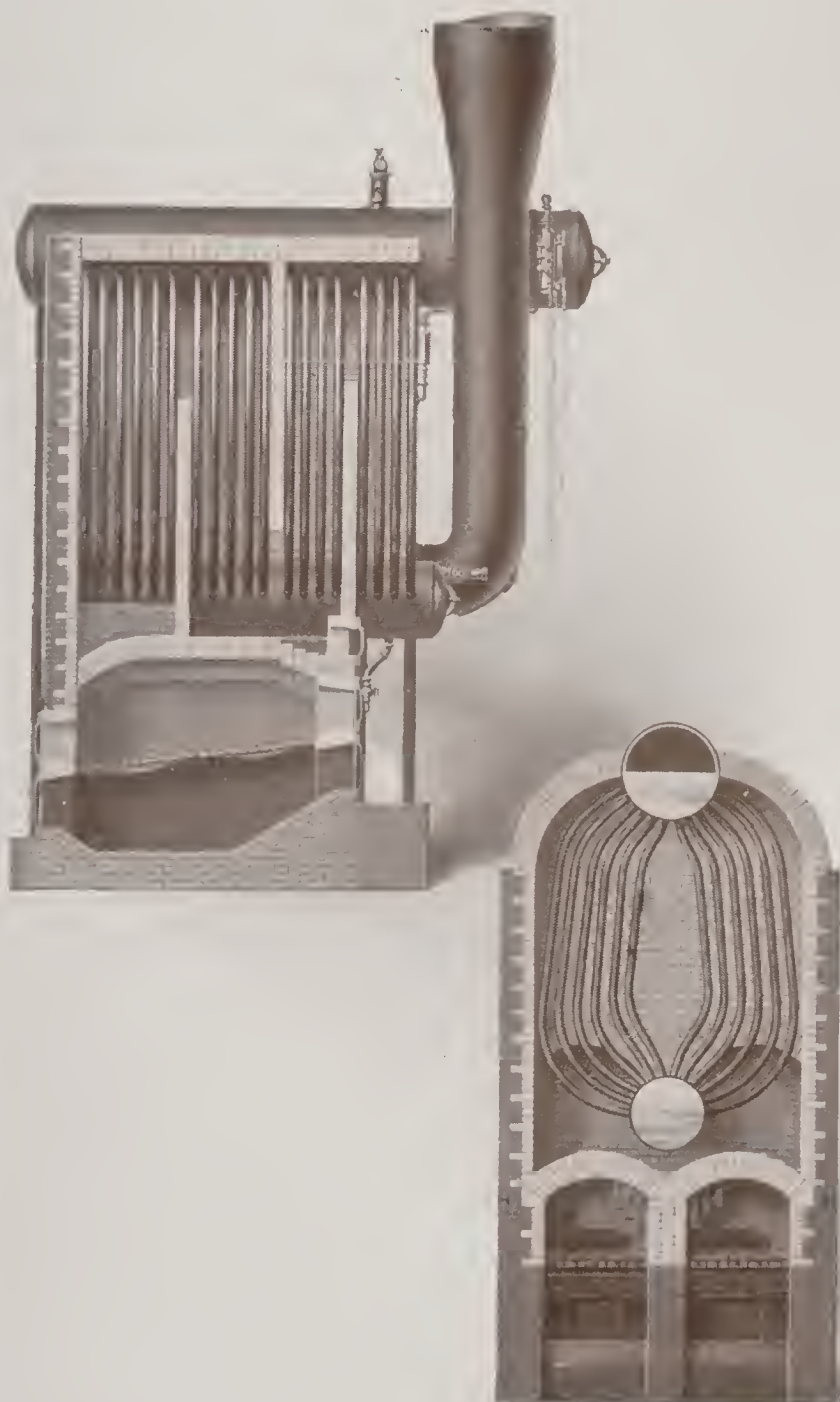


THE RUST WATER TUBE BOILER
SECTION THROUGH BOILER

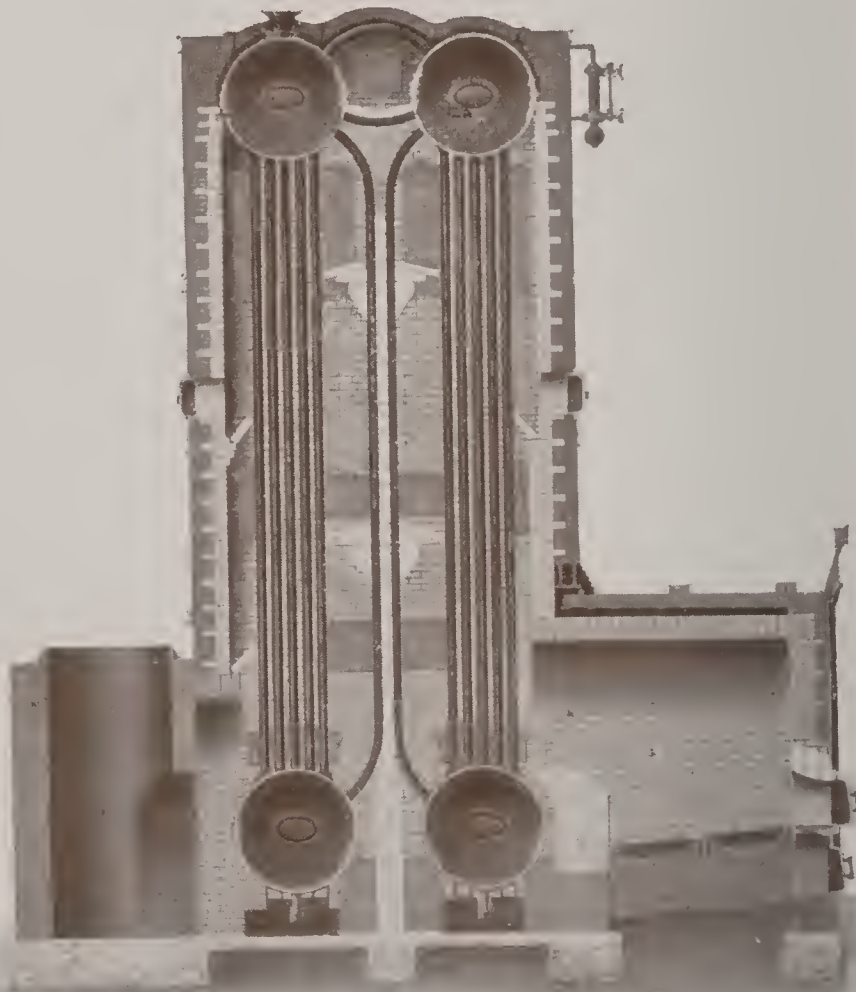


WICKES VERTICAL WATER TUBE SAFETY
STEAM BOILER

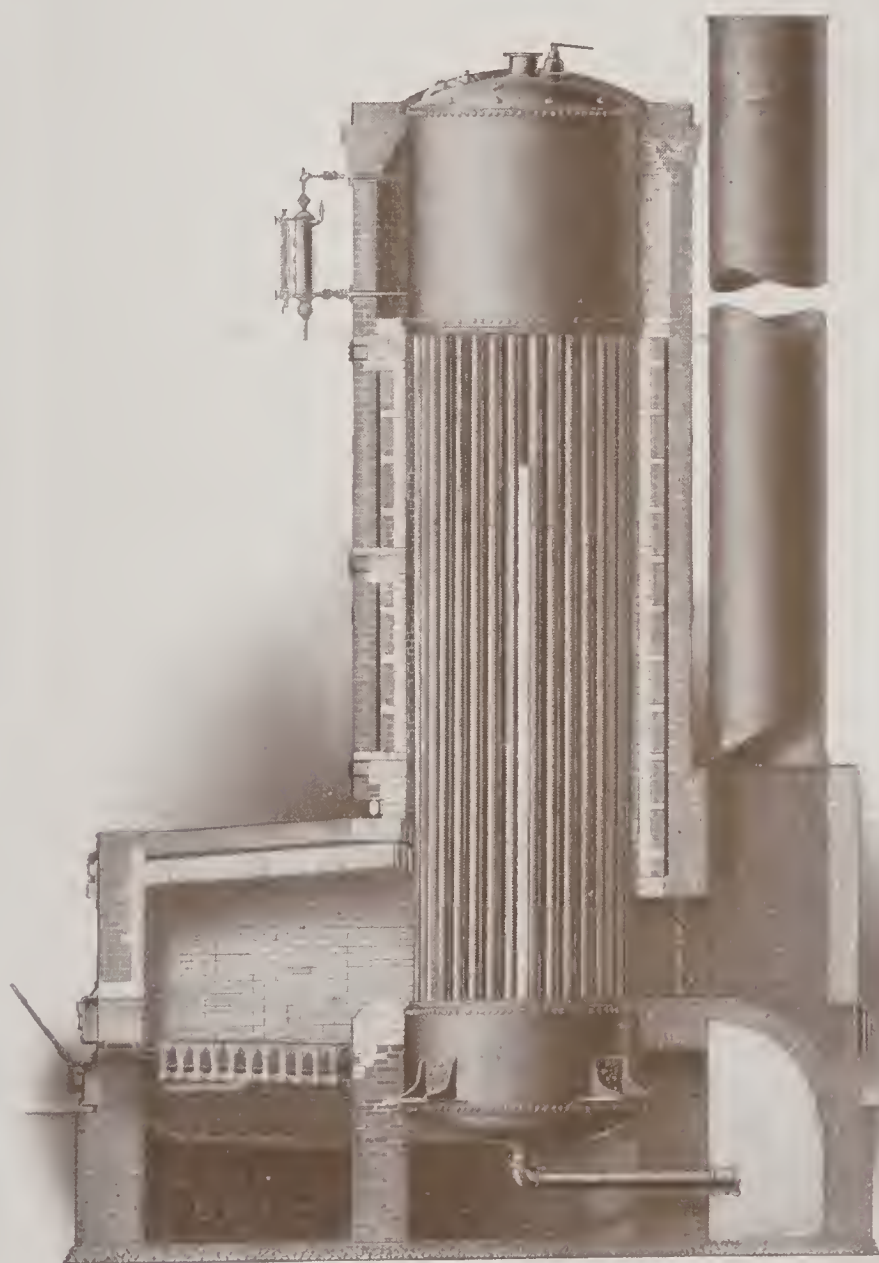

ERIE CITY IRON WORKS VERTICAL WATER
TUBE BOILER

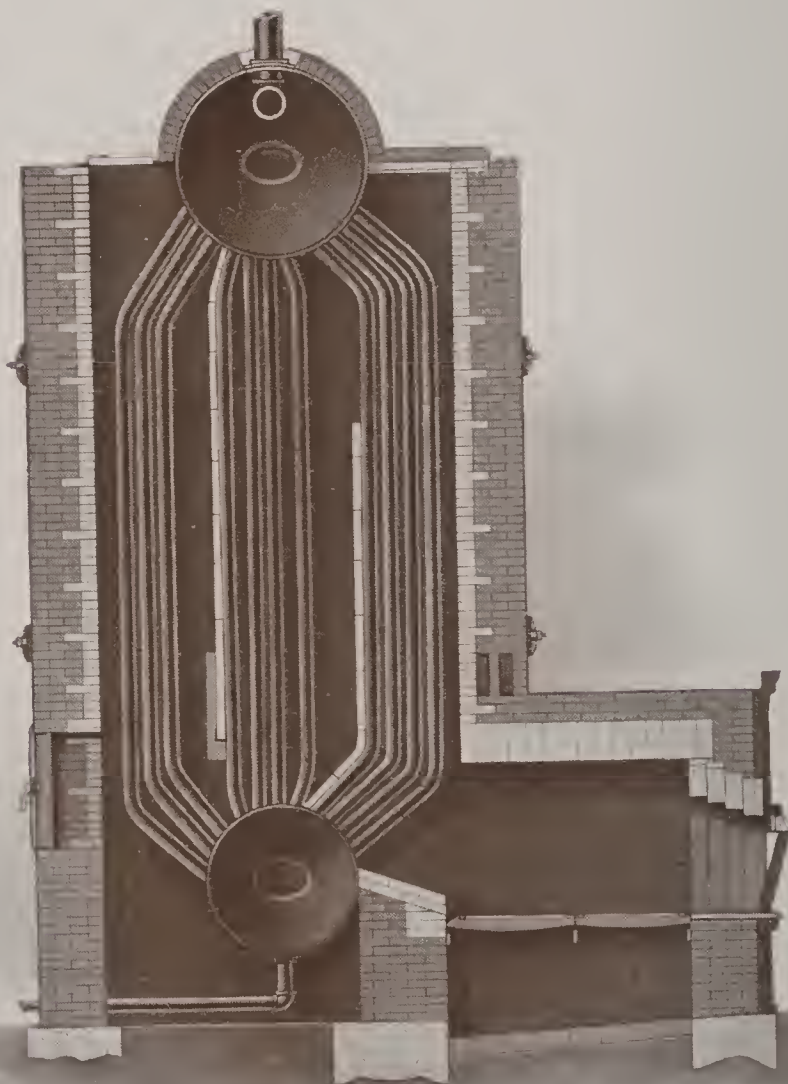

OIL WELL SUPPLY CO. WATER TUBE
BOILER

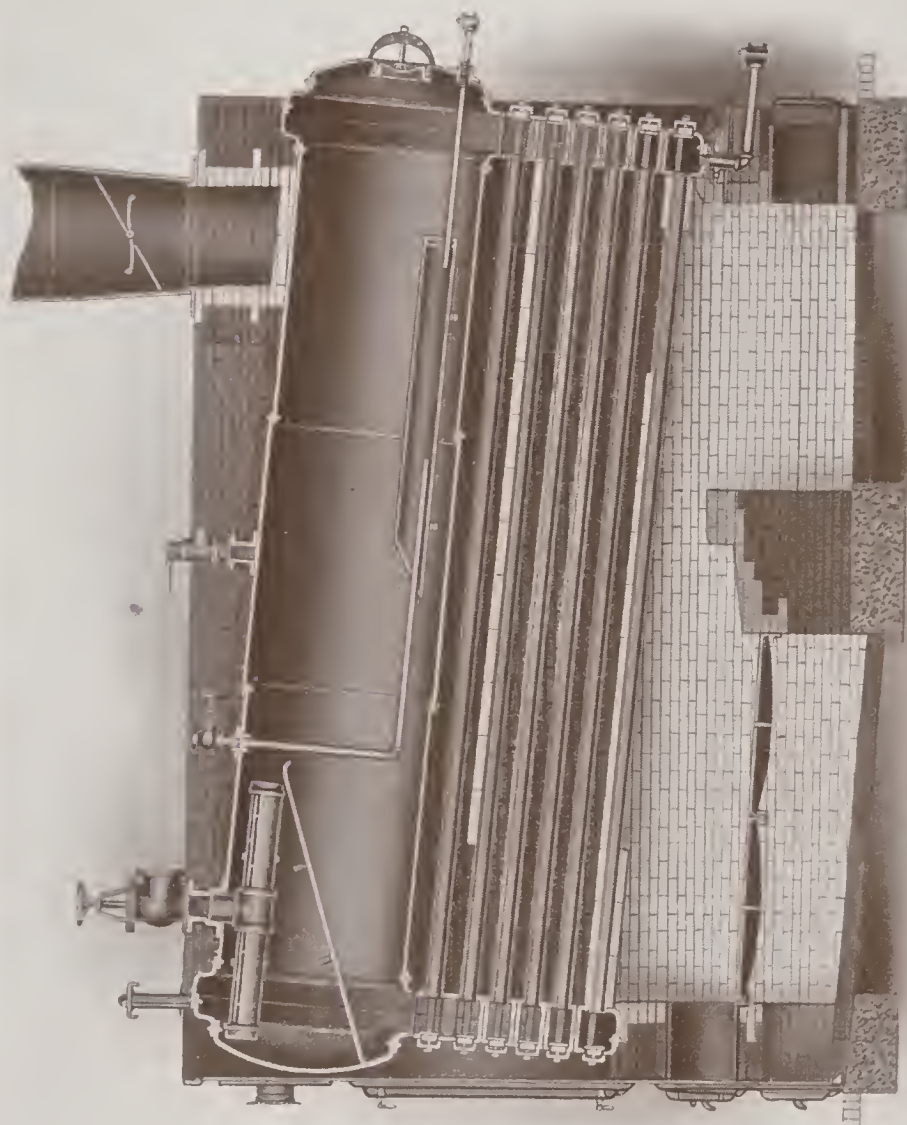

COAL GAS BENCHES AND WATER GAS PLANTS

THE question of the quality of refractory materials is becoming one of increasing importance to managers of Gas Plants. In the past, the limit of endurance of refractory materials used has been the controlling factor in limiting the output per unit of capacity. We are now making Sectional Retorts and Setting Shapes of "H.-W. RICON" (our Special High Silica) which is so high in heat resisting qualities that the only limit to rapidity of operation is the heat at which the gas would disintegrate or decompose. This has effected a decrease in the time of carbonizing, thus increasing the number of charges in a given time and consequently showing an actual increase in production per retort of from 40 to 50 per cent. Sectional retorts have previously been unsatisfactory, due to shrinkage; "H. W. RICON," expands with heat, making a durable retort which is permanently gas tight.


In addition to "H.-W. RICON," mentioned above, we also manufacture fire clay shapes for use in regenerators, fixers, carburetors and checkers. Our material has been found to be particularly suitable for all purposes in Coal Gas Benches and Regenerators and in Water Gas Plants.



SECTION OF RETORT

STANDARD RETORT GAS HOUSE

Riter-Conley Mfg. Co., Pittsburgh, Pa.

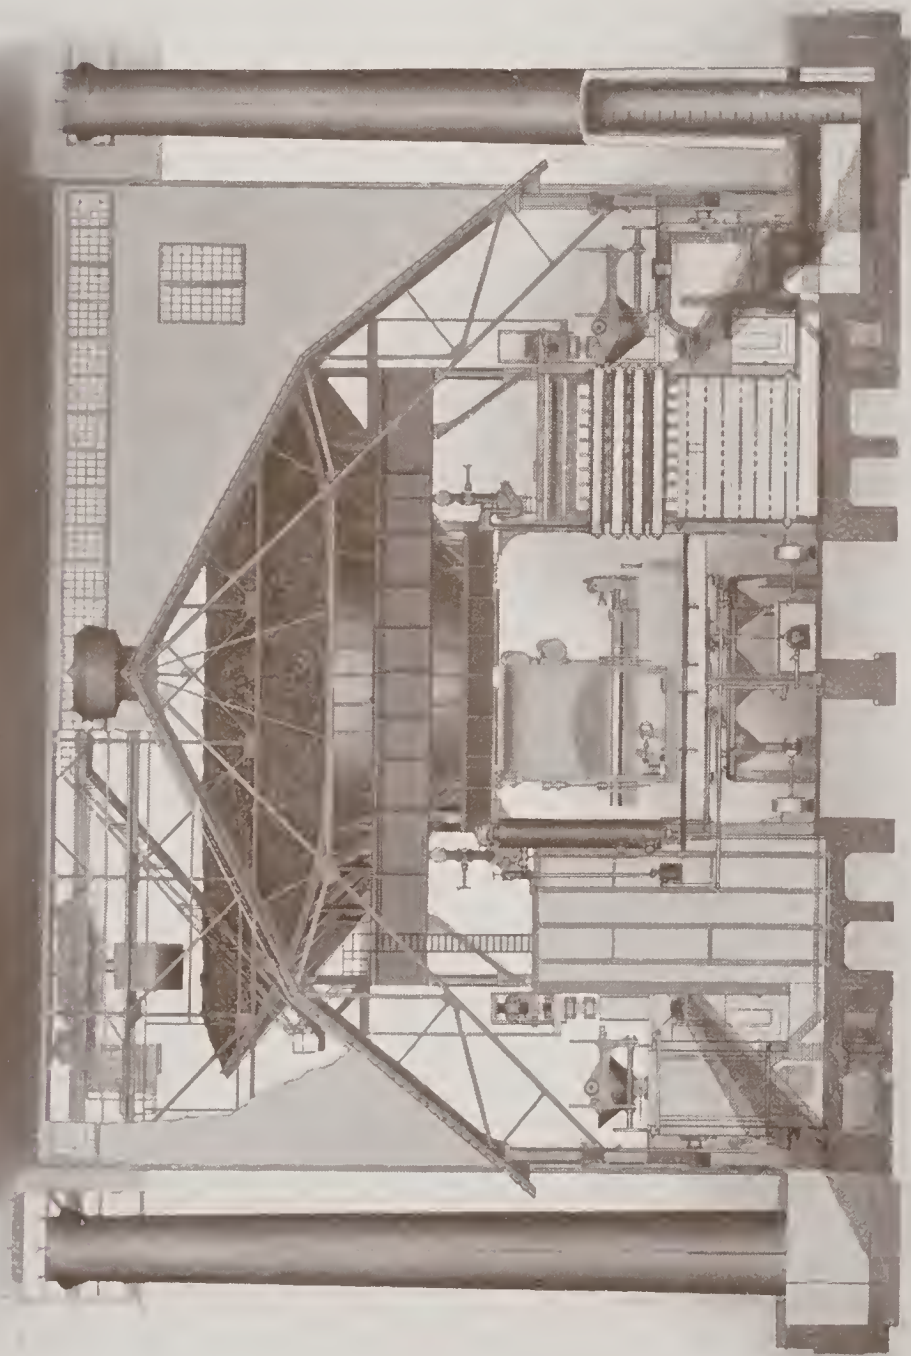

GENERAL INFORMATION ABOUT FIRE BRICK

ALL FIRE BRICK SHOULD BE KEPT IN A DRY PLACE

Moisture, especially in cold weather, will greatly injure any brick.

To obtain the best results from brickwork, observe the following precautions:

Use good fire clay equal in refractoriness to the brick itself, mixing with water to thin soup. Dip brick and rub to make a brick to brick joint.

Warm slowly to expel moisture.

Bear in mind that fire clay brick contract, and silica, chrome and magnesia brick expand under high temperatures.

Sudden variations of temperature cause silica brick to spawl, and also reduce their refractoriness. All furnaces in which silica brick are used should therefore be heated up and cooled down slowly and uniformly.

From 250 to 350 pounds of fire clay or silica cement are enough to lay one thousand brick. Fine ground fire clay should be used for laying up fire clay brick, silica cement for silica brick, magnesia cement for magnesia brick, and chrome cement for chrome brick.

For estimating on fire brick work, use the following figures:

1 square foot 4½-inch wall requires 7 brick

1 square foot 9-inch wall requires 14 brick

1 square foot 13½-inch wall requires 21 brick

1 cubic foot brickwork requires 17 nine-inch straight brick

1 cubic foot fire clay brickwork weighs 150 pounds

1 cubic foot silica brickwork weighs 130 pounds

1,000 brick (closely stacked) occupy 56 cubic feet

1,000 brick (loosely stacked) occupy 72 cubic feet

For estimating on red brickwork, figure on nine cubic feet of sand and three bushels of lime for laying 1,000 brick.

BRICK TABLES

THE following tables show how a circle or arch of any diameter may be laid up with a combination of the standard size fire brick, as designed in this catalogue.

TABLE OF WEDGE BRICK

Inside Diameter	No. 2 Wedge	No. 1 Wedge	Straight	Total
2 ft. 3 in.	57	57
2 " 6 "	49	11	60
3 " 0 "	38	30	68
3 " 6 "	26	50	76
4 " 0 "	12	71	83
4 " 6 "	91	91
5 " 0 "	91	8	99
5 " 6 "	91	15	106
6 " 0 "	91	23	114
6 " 6 "	91	30	121
7 " 0 "	91	38	129
7 " 6 "	91	45	136
8 " 0 "	91	53	144
8 " 6 "	91	60	151
9 " 0 "	91	68	159
9 " 6 "	91	76	167
10 " 0 "	91	83	174
10 " 6 "	91	91	182
11 " 0 "	91	98	189
11 " 6 "	91	106	197
12 " 0 "	91	113	204

TABLE OF ARCH BRICK

Inside Diameter	No. 3 Arch	No. 2 Arch	No. 1 Arch	Straight	Total
0 ft. 6 in.	19	19
1 " 0 "	12	15	27
1 " 6 "	4	30	34
1 " 9 "	38	38
2 " 0 "	34	8	42
2 " 6 "	26	23	49
3 " 0 "	19	38	57
3 " 6 "	11	53	64
4 " 0 "	4	68	72
4 " 3 "	76	76
4 " 6 "	76	4	80
5 " 0 "	76	11	87
5 " 6 "	76	19	95
6 " 0 "	76	27	103
6 " 6 "	76	34	110
7 " 0 "	76	42	118
7 " 6 "	76	49	125
8 " 0 "	76	57	133
8 " 6 "	76	64	140
9 " 0 "	76	72	148
9 " 6 "	76	79	155
10 " 0 "	76	87	163
10 " 6 "	76	94	170
11 " 0 "	76	102	178
11 " 6 "	76	109	185
12 " 0 "	76	117	193

TABLE OF 9-INCH KEY BRICK

Inside Diameter	No. 4 Key	No. 3 Key	No. 2 Key	No. 1 Key	Total
1 ft. 6 in.	25	25
2 " 0 "	16	13	29
2 " 6 "	9	25	34
3 " 0 "	38	38
3 " 6 "	29	13	42
4 " 0 "	21	25	46
4 " 6 "	12	38	50
5 " 0 "	5	50	55
5 " 3 "	57	57
5 " 6 "	55	4	59
6 " 0 "	50	13	63
6 " 6 "	46	21	67
7 " 0 "	42	29	71
7 " 6 "	38	38	76
8 " 0 "	34	46	80
8 " 6 "	29	55	84
9 " 0 "	25	63	88
9 " 6 "	21	71	92
10 " 0 "	17	80	97
10 " 6 "	13	88	101
11 " 0 "	9	96	105
11 " 6 "	4	105	109
12 " 0 "	113	113

TABLE OF 9-INCH KEY BRICK
CONTINUED

Inside Diameter	No. 1 Key	Straight	Total
12 ft. 6 in.	113	4	117
13 " 0 "	113	9	122
13 " 6 "	113	13	126
14 " 0 "	113	17	130
14 " 6 "	113	21	134
15 " 0 "	113	25	138
15 " 6 "	113	30	143
16 " 0 "	113	34	147
16 " 6 "	113	38	151
17 " 0 "	113	42	155
17 " 6 "	113	46	159
18 " 0 "	113	50	163
18 " 6 "	113	55	168
19 " 0 "	113	59	172
19 " 6 "	113	63	176
20 " 0 "	113	67	180
20 " 6 "	113	71	184
21 " 0 "	113	76	189
21 " 6 "	113	80	193
22 " 0 "	113	84	197
22 " 6 "	113	88	201
23 " 0 "	113	92	205
23 " 6 "	113	97	210

TABLE OF 9-INCH KEY BRICK
CONTINUED

Inside Diameter	No. 1 Key	Straight	Total
24 ft. 0 in.	113	101	214
24 " 6 "	113	105	218
25 " 0 "	113	109	222
25 " 6 "	113	113	226
26 " 0 "	113	117	230
26 " 6 "	113	122	235
27 " 0 "	113	126	239
27 " 6 "	113	130	243
28 " 0 "	113	134	247
28 " 6 "	113	138	251
29 " 0 "	113	143	256
29 " 6 "	113	147	260
30 " 0 "	113	151	264
30 " 6 "	113	155	268
31 " 0 "	113	159	272
31 " 6 "	113	163	276
32 " 0 "	113	168	281
32 " 6 "	113	172	285
33 " 0 "	113	176	289
33 " 6 "	113	180	293
34 " 0 "	113	184	297
34 " 6 "	113	189	302
35 " 0 "	113	193	306

TABLE OF 13 1/2-INCH KEY BRICK

Inside Diameter	No. 4 Key	No. 2 Key	Straight	Total
6 ft. 0 in.	52	52
6 " 6 "	48	7	55
7 " 0 "	42	16	58
7 " 6 "	37	24	61
8 " 0 "	33	32	65
8 " 6 "	28	40	68
9 " 0 "	23	48	71
9 " 6 "	18	56	74
10 " 0 "	12	65	77
10 " 6 "	7	73	80
11 " 0 "	2	81	83
11 " 3 "	85	85
11 " 6 "	85	2	87
12 " 0 "	85	5	90
12 " 6 "	85	8	93
13 " 0 "	85	11	96
13 " 6 "	85	14	99
14 " 0 "	85	17	102
14 " 6 "	85	21	106
15 " 0 "	85	24	109
15 " 6 "	85	27	112
16 " 0 "	85	30	115
16 " 6 "	85	33	118

TABLE OF 13 ½-INCH KEY BRICK
CONTINUED

Inside Diameter	No. 2 Key	Straight	Total
17 ft. 0 in.	85	36	121
17 " 6 "	85	39	124
18 " 0 "	85	43	128
18 " 6 "	85	46	131
19 " 0 "	85	49	134
19 " 6 "	85	52	137
20 " 0 "	85	55	140
20 " 6 "	85	58	143
21 " 0 "	85	61	146
21 " 6 "	85	65	150
22 " 0 "	85	68	153
22 " 6 "	85	71	156
23 " 0 "	85	74	159
23 " 6 "	85	77	162
24 " 0 "	85	80	165
24 " 6 "	85	83	168
25 " 0 "	85	87	172
25 " 6 "	85	90	175
26 " 0 "	85	93	178
26 " 6 "	85	96	181
27 " 0 "	85	99	184
27 " 6 "	85	102	187
28 " 0 "	85	105	190

TABLE OF 13 1/2-INCH KEY BRICK
CONTINUED

Inside Diameter	No. 2 Key	Straight	Total
28 ft. 6 in.	85	109	194
29 " 0 "	85	112	197
29 " 6 "	85	115	200
30 " 0 "	85	118	203
30 " 6 "	85	121	206
31 " 0 "	85	124	209
31 " 6 "	85	127	212
32 " 0 "	85	131	216
32 " 6 "	85	134	219
33 " 0 "	85	137	222
33 " 6 "	85	140	225
34 " 0 "	85	143	228
34 " 6 "	85	146	231
35 " 0 "	85	149	234

TABLE OF 9X6X3-INCH KEY BRICK

Inside Diameter	No. 4 Key 9x6x4 13/16 x3"	No. 2 Key 9x6x5 3/8 x3"	Squares	Total
6 ft. 0 in.	47	47
6 " 6 "	44	6	50
7 " 0 "	42	12	54
7 " 6 "	38	19	57
8 " 0 "	34	26	60
8 " 6 "	31	32	63
9 " 0 "	27	39	66
9 " 6 "	23	46	69
10 " 0 "	20	52	72
10 " 6 "	16	59	75

TABLE OF 9X6X3-INCH KEY BRICK
CONTINUED

Inside Diameter	No. 4 Key 9x6x4 $\frac{1}{16}$ x3"	No. 2 Key 9x6x5 $\frac{3}{8}$ x3"	Squares	Total
11 ft. 0 in.	13	66	79
11 " 6 "	10	72	82
12 " 0 "	6	79	85
12 " 6 "	3	85	88
13 " 0 "	91	91
13 " 6 "	91	3	94
14 " 0 "	91	6	97
14 " 6 "	91	10	101
15 " 0 "	91	13	104
15 " 6 "	91	16	107
16 " 0 "	91	19	110
16 " 6 "	91	22	113
17 " 0 "	91	25	116
17 " 6 "	91	28	119
18 " 0 "	91	32	123
18 " 6 "	91	35	126
19 " 0 "	91	38	129
19 " 6 "	91	41	132
20 " 0 "	91	44	135
20 " 6 "	91	47	138
21 " 0 "	91	50	141
21 " 6 "	91	54	145
22 " 0 "	91	57	148
22 " 6 "	91	60	151
23 " 0 "	91	63	154
23 " 6 "	91	66	157
24 " 0 "	91	69	160
24 " 6 "	91	72	163
25 " 0 "	91	76	167
25 " 6 "	91	79	170
26 " 0 "	91	82	173
26 " 6 "	91	85	176
27 " 0 "	91	88	179
27 " 6 "	91	91	182
28 " 0 "	91	94	185
28 " 6 "	91	98	189
29 " 0 "	91	101	192
29 " 6 "	91	104	195
30 " 0 "	91	107	198

TABLE OF GAS FLUE ARCH BRICK FOR BLAST FURNACE DOWNCOMER

Inside Diameter Openings	Shapes Required			
	No. 3	No. 4	No. 5	Straight
2 ft. 9 in.	46			
3 ft. 0 in.	34	15		
3 ft. 6 in.	16	38		
4 ft. 0 in.		59		
4 ft. 6 in.		26	39	
5 ft. 0 in.			70	
5 ft. 6 in.			70	6
6 ft. 0 in.			70	11
6 ft. 6 in.			70	16
7 ft. 0 in.			70	22
7 ft. 6 in.			70	27
8 ft. 0 in.			70	32
8 ft. 6 in.			70	38
9 ft. 0 in.			70	43

CUPOLA BLOCKS

Inside Diameter Cupola	Shapes Required			
	No. 1	No. 2	No. 3	No. 4
2 ft. 6 in.	15			
2 ft. 9 in.	8	8		
3 ft. 0 in.		17		
3 ft. 3 in.		12	6	
3 ft. 6 in.		8	11	
3 ft. 9 in.		4	16	
4 ft. 0 in.			21	
4 ft. 3 in.			15	7
4 ft. 6 in.			10	13
4 ft. 9 in.			5	19
5 ft. 0 in.				25

STANDARD BOTTOM BLOCKS

IN ONE COURSE OF FOLLOWING DIAMETERS

Blocks 18x12x8"		Blocks 18x9x4½"	
Diameter	No. Blocks	Diameter	No. Blocks
8' 0"	89	8' 0"	198
8' 6"	99	8' 6"	222
9' 0"	110	9' 0"	248
9' 6"	122	9' 6"	275
10' 0"	134	10' 0"	303
10' 6"	147	10' 6"	333
11' 0"	161	11' 0"	364
11' 6"	175	11' 6"	397
12' 0"	189	12' 0"	431
12' 6"	204	12' 6"	466
13' 0"	220	13' 0"	503
13' 6"	237	13' 6"	541
14' 0"	254	14' 0"	581
14' 6"	271	14' 6"	621
15' 0"	289	15' 0"	664
15' 6"	308	15' 6"	708
16' 0"	327	16' 0"	753
16' 6"	347	16' 6"	799
17' 0"	368	17' 0"	847
17' 6"	389	17' 6"	897
18' 0"	411	18' 0"	947
18' 6"	433	18' 6"	999
19' 0"	456	19' 0"	1053
19' 6"	479	19' 6"	1108
20' 0"	503	20' 0"	1164
20' 6"	528	20' 6"	1222
21' 0"	554	21' 0"	1281
21' 6"	579	21' 6"	1342
22' 0"	605	22' 0"	1403
22' 6"	632	22' 6"	1467
23' 0"	660	23' 0"	1531
23' 6"	688	23' 6"	1598
24' 0"	717	24' 0"	1665
24' 6"	746	24' 6"	1734
25' 0"	776	25' 0"	1804
25' 6"	807	25' 6"	1876

TABLE OF SILICA 12-INCH WEDGE BRICK 2½-INCH SERIES

Inside Diameter	2½" No. 2 Wedge 12 x 6 x 2⅞ x 2½"	2½" No. 1 Wedge 12 x 6 x 2⅞ x 2½"	Straight 12 x 6 x 2½	Total
13 ft. 3 in.	200			200
13 " 6 "	199	5		204
14 " 0 "	191	20		211
14 " 6 "	184	35		219
15 " 0 "	176	50		226
15 " 6 "	168	66		234
16 " 0 "	161	80		241
16 " 6 "	153	96		249
17 " 0 "	146	111		257
17 " 6 "	138	126		264
18 " 0 "	131	141		272
18 " 6 "	123	156		279
19 " 0 "	116	171		287
19 " 6 "	108	186		294
20 " 0 "	101	201		302
20 " 6 "	93	216		309
21 " 0 "	86	231		317
21 " 6 "	78	246		324
22 " 0 "	71	261		332
22 " 6 "	63	276		339
23 " 0 "	55	292		347
23 " 6 "	48	307		355
24 " 0 "	40	322		362
24 " 6 "	33	337		370
25 " 0 "	25	352		377
25 " 6 "	18	367		385
26 " 0 "	10	382		392
26 " 6 "	3	397		400
26 " 9 "		404		404
27 " 0 "		404	4	408
27 " 6 "		404	11	415
28 " 0 "		404	19	423
28 " 6 "		404	27	431
29 " 0 "		404	34	438
29 " 6 "		404	42	446
30 " 0 "		404	49	453
30 " 6 "		404	57	461
31 " 0 "		404	64	468
31 " 6 "		404	71	475
32 " 0 "		404	79	483
32 " 6 "		404	87	491
33 " 0 "		404	94	498
33 " 6 "		404	102	506
34 " 0 "		404	109	513
34 " 6 "		404	117	521
35 " 0 "		404	125	529
35 " 6 "		404	132	536
36 " 0 "		404	140	544

See page 135 for 3-inch series. In ordering state whether you desire 2½-inch or 3-inch series.

TABLE OF SILICA 12-INCH WEDGE BRICK 3-INCH SERIES

Inside Diameter	3" No. 2 Wedge 12 x 6 x 3 x 2"	3" No. 1 Wedge 12 x 6 x 3 x 2½"	Straight 12 x 6 x 3"	Total
4 ft. 0 in.	75	75
4 " 6 "	69	13	82
5 " 0 "	63	25	88
5 " 6 "	56	38	94
6 " 0 "	51	50	101
6 " 6 "	44	63	107
7 " 0 "	38	75	113
7 " 6 "	31	88	119
8 " 0 "	25	101	126
8 " 6 "	19	113	132
9 " 0 "	12	126	138
9 " 6 "	7	138	145
10 " 0 "	151	151
10 " 6 "	151	6	157
11 " 0 "	151	13	164
11 " 6 "	151	19	170
12 " 0 "	151	25	176
12 " 6 "	151	32	183
13 " 0 "	151	38	189
13 " 6 "	151	44	195
14 " 0 "	151	50	201
14 " 6 "	151	57	208
15 " 0 "	151	63	214
15 " 6 "	151	69	220
16 " 0 "	151	75	226
16 " 6 "	151	82	233
17 " 0 "	151	88	239
17 " 6 "	151	94	245
18 " 0 "	151	101	252
18 " 6 "	151	107	258
19 " 0 "	151	113	264
19 " 6 "	151	120	271
20 " 0 "	151	126	277
20 " 6 "	151	132	283
21 " 0 "	151	139	290
21 " 6 "	151	145	296
22 " 0 "	151	151	302

See page 134 for 2½-inch series. In ordering state whether you desire 2½-inch or 3-inch series.

TABLE OF STANDARD CIRCLE BRICK

Inside Diameter	No. 1	No. 2	No. 3	No. 4
2 ft. 0 in.	12
2 " 3 "	9	4
2 " 6 "	6	8
2 " 9 "	3	12
3 " 0 "	16
3 " 3 "	8	9
3 " 6 "	2	16
3 " 9 "	17	2
4 " 0 "	15	5
4 " 3 "	13	8
4 " 6 "	12	10
4 " 9 "	10	13
5 " 0 "	9	15
5 " 3 "	8	18
5 " 6 "	6	21
5 " 9 "	5	23
6 " 0 "	3	26
6 " 3 "	2	28
6 " 6 "	31

TABLE OF MAGNESITE AND CHROME KEY BRICK STANDARD SIZE

Inside Diameter	No. 2 Key $8\frac{3}{4} \times 4\frac{3}{8} \times 3\frac{3}{8}$ "	No. 1 Key $8\frac{3}{4} \times 4\frac{3}{8} \times 3\frac{7}{8}$ "	Squares $8\frac{3}{4} \times 4\frac{3}{8}$ "	Total
5 ft. 0 in.	54	2		56
5 " 6 "	48	12	60
6 " 0 "	46	19	65
6 " 6 "	41	28	69
7 " 0 "	37	36	73
7 " 6 "	33	45	78
8 " 0 "	29	53	82
8 " 6 "	24	62	86
9 " 0 "	20	71	91
9 " 6 "	16	79	95
10 " 0 "	11	88	99
10 " 6 "	6	97	103
11 " 0 "	3	105	108
11 " 6 "	110	2	112
12 " 0 "	110	6	116
12 " 6 "	110	11	121
13 " 0 "	110	15	125
13 " 6 "	110	19	129
14 " 0 "	110	24	134
14 " 6 "	110	28	138
15 " 0 "	110	32	142
15 " 6 "	110	37	147
16 " 0 "	110	41	151
16 " 6 "	110	45	155
17 " 0 "	110	49	159
17 " 6 "	110	54	164
18 " 0 "	110	58	168
18 " 6 "	110	62	172
19 " 0 "	110	67	177
19 " 6 "	110	71	181
20 " 0 "	110	75	185
20 " 6 "	110	80	190
21 " 0 "	110	84	194
21 " 6 "	110	88	198
22 " 0 "	110	93	203
22 " 6 "	110	96	206
23 " 0 "	110	101	211
23 " 6 "	110	105	215
24 " 0 "	110	110	220
24 " 6 "	110	114	224
25 " 0 "	110	118	228

TABLE OF MAGNESITE ARCH BRICK
STANDARD SIZE

Inside Diameter	No. 2 Arch $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{3}{8}$ $\times 1\frac{5}{8}$ "	No. 1 Arch $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{3}{8}$ $\times 2$ "	Squares $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{3}{8}$ "	Total
1 ft. 6 in.	36	36
2 " 0 "	30	14	44
2 " 6 "	22	30	52
3 " 0 "	14	46	60
3 " 6 "	7	61	68
4 " 0 "	76	76
4 " 6 "	76	7	83
5 " 0 "	76	15	91
5 " 6 "	76	23	99
6 " 0 "	76	31	108
6 " 6 "	76	39	115
7 " 0 "	76	47	123
7 " 6 "	76	55	131
8 " 0 "	76	63	139
8 " 6 "	76	71	147
9 " 0 "	76	79	155
9 " 6 "	76	87	163
10 " 0 "	76	95	171
10 " 6 "	76	103	179
11 " 0 "	76	111	187
11 " 6 "	76	119	195
12 " 0 "	76	127	203

TABLE OF MAGNESITE WEDGE BRICK STANDARD SIZE

Inside Diameter	No. 2 Wedge $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{3}{8}$ $\times 1\frac{3}{8}$ "	No. 1 Wedge $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{3}{8}$ $\times 1\frac{3}{4}$ "	Squares $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{3}{8}$ "	Total
2 ft. 0 in.	55	55
2 " 6 "	42	21	63
3 " 0 "	28	43	71
3 " 6 "	15	64	79
4 " 0 "	2	85	87
4 " 6 "	88	7	95
5 " 0 "	88	15	103
5 " 6 "	88	23	111
6 " 0 "	88	31	119
6 " 6 "	88	39	127
7 " 0 "	88	47	135
7 " 6 "	88	55	143
8 " 0 "	88	63	151
8 " 6 "	88	71	159
9 " 0 "	88	78	166
9 " 6 "	88	86	174
10 " 0 "	88	94	182
10 " 6 "	88	102	190
11 " 0 "	88	110	198
11 " 6 "	88	118	206
12 " 0 "	88	126	214

TABLE OF CHROME WEDGE BRICK

Inside Diameter	No. 2 Wedge $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{1}{2}$ $\times 1\frac{1}{2}"$	No. 1 Wedge $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{1}{2}$ $\times 1\frac{7}{8}"$	Straight $8\frac{3}{4} \times 4\frac{3}{8} \times 2\frac{1}{2}"$	Total
2 ft. $2\frac{1}{4}$ in.	55	55
2 " 6 "	47	13	60
3 " 0 "	34	33	67
3 " 6 "	22	53	75
4 " 0 "	10	73	83
4 " 6 "	88	2	90
5 " 0 "	88	9	97
5 " 6 "	88	17	105
6 " 0 "	88	24	112
6 " 6 "	88	32	120
7 " 0 "	88	40	128
7 " 6 "	88	47	135
8 " 0 "	88	55	143
8 " 6 "	88	62	150
9 " 0 "	88	70	158
9 " 6 "	88	77	165
10 " 0 "	88	85	173
10 " 6 "	88	92	180
11 " 0 "	88	100	188
11 " 6 "	88	108	196
12 " 0 "	88	115	203

T E M P E R A T U R E S

Below we give the temperatures of iron, steel and other metals, under various conditions, according to the latest scientific investigations.

	Centigrade Degrees	Fahrenheit Degrees
Tin.....melts	229	445
Lead.....melts	322	612
Lead.....boils	1040	1904
Zinc.....melts	412	775
Zinc.....boils	1040	1904
Aluminum.....melts	700	1252
Silver.....melts	957	1775
Brass.....melts	1021	1870
Copper.....melts	1029	1885
Gold.....melts	1038	1900
Cobalt.....melts	1100	2012
Cast Iron, white.....melts	1135	2075
Cast Iron, gray.....melts	1222	2230
Steel.....melts	1300	2372
Iron, wrought.....melts	1500	2732
Nickel.....melts	1500	2732
Platinum.....melts	2533	4593
Glass Furnace, between the pots.	1375	2507
In the pots, refining	1310	2390
In the pots, working.....	1045	1913
Tanks melted for casting.....	1310	2390
Annealing Glassware..... {	444	800
	to 555	to 1000
Siemens Crucible Steel Furnace {	1460	2660
varies from..... {	to 1590	to 2894

TEMPERATURES—CONTINUED

	Centigrade Degrees	Fahrenheit Degrees
BESSEMER PROCESS		
Running the slag	1580	2876
Running steel into ladle	1640	2984
Running steel into mold	1580	2876
Soaking pit furnace, ingot in	1200	2192
Ingot under hammer	1080	1976
OPEN HEARTH PROCESS		
Gas from producers	720	1328
Gas entering generator	400	752
Gas leaving generator	1200	2192
Air leaving generator	1000	1832
Fumes passing to shaft	300	572
End of fusion of charge	1420	2588
Refining the steel	1500	2732
Running into ladle, first	1580	2876
Running into ladle, last	1490	2714
BLAST FURNACE—GRAY BESSEMER		
Front of tuyere	1930	3506
At tapping	1570	2858

The following table affords a somewhat rough method of estimating high temperatures.

	Centigrade Degrees	Fahrenheit Degrees
Just glowing in the dark	525	977
Dark red	700	1252
Cherry red	908	1666
Bright cherry red	1000	1832
Orange	1150	2102
White	1300	2372
Dazzling white	1500	2732

FUSING POINTS OF SEGER CONES

Number of Cone	Fusing Point		Number of Cone	Fusing Point	
	Degrees Fahr.	Degrees Centig.		Degrees Fahr.	Degrees Centig.
.022	1,094	590	10	2,426	1,330
.021	1,148	620	11	2,462	1,350
.020	1,202	650	12	2,498	1,370
.019	1,256	680	13	2,534	1,390
.018	1,310	710	14	2,570	1,410
.017	1,364	740	15	2,606	1,430
.016	1,418	770	16	2,642	1,450
.015	1,472	800	17	2,678	1,470
.014	1,526	830	18	2,714	1,490
.013	1,580	860	19	2,750	1,510
.012	1,634	890	20	2,786	1,530
.011	1,688	920	21	2,822	1,550
.010	1,742	950	22	2,858	1,570
.09	1,778	970	23	2,894	1,590
.08	1,814	990	24	2,930	1,610
.07	1,850	1,010	25	2,966	1,630
.06	1,886	1,030	26	3,002	1,650
.05	1,922	1,050	27	3,038	1,670
.04	1,958	1,070	28	3,074	1,690
.03	1,994	1,090	29	3,110	1,710
.02	2,030	1,110	30	3,146	1,730
.01	2,066	1,130	31	3,182	1,750
1	2,102	1,150	32	3,218	1,770
2	2,138	1,170	33	3,254	1,790
3	2,174	1,190	34	3,290	1,810
4	2,210	1,210	35	3,326	1,830
5	2,246	1,230	36	3,362	1,850
6	2,282	1,250	37	3,398	1,870
7	2,318	1,270	38	3,434	1,890
8	2,354	1,290	39	3,470	1,910
9	2,390	1,310			

COMPARISON OF CENTIGRADE AND
FAHRENHEIT THERMOMETERS

Centi- grade	Fahren- heit	Centi- grade	Fahren- heit	Centi- grade	Fahren- heit
1815	3299	1770	3218	1725	3137
1814	3297.2	1769	3216.2	1724	3135.2
1813	3295.4	1768	3214.4	1723	3133.4
1812	3293.6	1767	3112.6	1722	3131.6
1811	3291.8	1766	3210.8	1721	3129.8
1810	3290	1765	3209	1720	3128
1809	3288.2	1764	3207.2	1719	3126.2
1808	3286.4	1763	3205.4	1718	3124.4
1807	3284.6	1762	3203.6	1717	3122.6
1806	3282.8	1761	3201.8	1716	3120.8
1805	3281	1760	3200	1715	3119
1804	3279.2	1759	3198.2	1714	3117.2
1803	3277.4	1758	3196.4	1713	3115.4
1802	3275.6	1757	3194.6	1712	3113.6
1801	3273.8	1756	3192.8	1711	3111.8
1800	3272	1755	3191	1710	3110
1799	3270.2	1754	3189.2	1709	3108.2
1798	3268.4	1753	3187.4	1708	3106.4
1797	3266.6	1752	3185.6	1707	3104.6
1796	3264.8	1751	3183.8	1706	3102.8
1795	3263	1750	3182	1705	3101
1794	3261.2	1749	3180.2	1704	3099.2
1793	3259.4	1748	3178.4	1703	3097.4
1792	3257.6	1747	3176.6	1702	3095.6
1791	3255.8	1746	3174.8	1701	3093.8
1790	3254	1745	3173	1700	3092
1789	3252.2	1744	3171.2	1699	3090.2
1788	3250.4	1743	3169.4	1698	3088.4
1787	3248.6	1742	3167.6	1697	3086.6
1786	3246.8	1741	3165.8	1696	3084.8
1785	3245	1740	3164	1695	3083
1784	3243.2	1739	3162.2	1694	3081.2
1783	3241.4	1738	3160.4	1693	3079.4
1782	3239.6	1737	3158.6	1692	3077.6
1781	3237.8	1736	3156.8	1691	3075.8
1780	3236	1735	3155	1690	3074
1779	3234.2	1734	3153.2	1689	3072.2
1778	3232.4	1733	3151.4	1688	3070.4
1777	3230.6	1732	3149.6	1687	3068.6
1776	3228.8	1731	3147.8	1686	3066.8
1775	3227	1730	3146	1685	3065
1774	3225.2	1729	3144.2	1684	3063.2
1773	3223.4	1728	3142.4	1683	3061.4
1772	3221.6	1727	3140.6	1682	3059.6
1771	3219.8	1726	3138.8	1681	3057.8

COMPARISON OF CENTIGRADE AND FAHRENHEIT
THERMOMETERS—CONTINUED

Centi- grade	Fahren- heit	Centi- grade	Fahren- heit	Cent- grade	Fahren- heit
1680	3056	1635	2975	1590	2894
1679	3054.2	1634	2973.2	1589	2892.2
1678	3052.4	1633	2971.4	1588	2890.4
1677	3050.6	1632	2969.6	1587	2888.6
1676	3048.8	1631	2967.8	1586	2886.8
1675	3047	1630	2966	1585	2885
1674	3045.2	1629	2964.2	1584	2883.2
1673	3043.4	1628	2962.4	1583	2881.4
1672	3041.6	1627	2960.6	1582	2879.6
1671	3039.8	1626	2958.8	1581	2877.8
1670	3038	1625	2957	1580	2876
1669	3036.2	1624	2955.2	1579	2874.2
1668	3034.4	1623	2953.4	1578	2872.4
1667	3032.6	1622	2951.6	1577	2870.6
1666	3030.8	1621	2949.8	1576	2868.8
1665	3029	1620	2948	1575	2867
1664	3027.2	1619	2946.2	1574	2865.2
1663	3025.4	1618	2944.4	1573	2863.4
1662	3023.6	1617	2942.6	1572	2861.6
1661	3021.8	1616	2940.8	1571	2859.8
1660	3020	1615	2939	1570	2858
1659	3018.2	1614	2937.2	1569	2856.2
1658	3016.4	1613	2935.4	1568	2854.4
1657	3014.6	1612	2933.6	1567	2852.6
1656	3012.8	1611	2931.8	1566	2850.8
1655	3011	1610	2930	1565	2849
1654	3009.2	1609	2928.2	1564	2847.2
1653	3007.4	1608	2926.4	1563	2845.4
1652	3005.6	1607	2924.6	1562	2843.6
1651	3003.8	1606	2922.8	1561	2841.8
1650	3002	1605	2921	1560	2840
1649	3000.2	1604	2919.2	1559	2838.2
1648	2998.4	1603	2917.4	1558	2836.4
1647	2996.6	1602	2915.6	1557	2834.6
1646	2994.8	1601	2913.8	1556	2832.8
1645	2993	1600	2912	1555	2831
1644	2991.2	1599	2910.2	1554	2829.2
1643	2989.4	1598	2908.4	1553	2827.4
1642	2987.6	1597	2906.6	1552	2825.6
1641	2985.8	1596	2904.8	1551	2823.8
1640	2984	1595	2903	1550	2822
1639	2982.2	1594	2901.2	1549	2820.2
1638	2980.4	1593	2899.4	1548	2818.4
1637	2978.6	1592	2897.6	1547	2816.6
1636	2976.8	1591	2895.8	1546	2814.8

COMPARISON OF CENTIGRADE AND FAHRENHEIT
THERMOMETERS—CONTINUED

Centi- grade	Fahren- heit	Centi- grade	Fahren- heit	Centi- grade	Fahren- heit
1545	2813	1500	2732	1455	2651
1544	2811.2	1499	2730.2	1454	2649.2
1543	2809.4	1498	2728.4	1453	2647.4
1542	2807.6	1497	2726.6	1452	2645.6
1541	2805.8	1496	2724.8	1451	2643.8
1540	2804	1495	2723	1450	2642
1539	2802.2	1494	2721.2	1449	2640.2
1538	2800.4	1493	2719.4	1448	2638.4
1537	2798.6	1492	2717.6	1447	2636.6
1536	2796.8	1491	2715.8	1446	2634.8
1535	2795	1490	2714	1445	2633
1534	2793.2	1489	2712.2	1444	2631.2
1533	2791.4	1488	2710.4	1443	2629.4
1532	2789.6	1487	2708.6	1442	2627.6
1531	2787.8	1486	2706.8	1441	2625.8
1530	2785	1485	2705	1440	2624
1529	2784.2	1484	2703.2	1439	2622.2
1528	2782.4	1483	2701.4	1438	2620.4
1527	2780.6	1482	2699.6	1437	2618.6
1526	2778.8	1481	2697.8	1436	2616.8
1525	2777	1480	2696	1435	2615
1524	2775.2	1479	2694.2	1434	2613.2
1523	2773.4	1478	2692.4	1433	2611.4
1522	2771.6	1477	2690.6	1432	2609.6
1521	2769.8	1476	2688.8	1431	2607.8
1520	2768	1475	2687	1430	2606
1519	2766.2	1474	2685.2	1429	2604.2
1518	2764.4	1473	2683.4	1428	2602.4
1517	2762.6	1472	2681.6	1427	2600.6
1516	2760.8	1471	2679.8	1426	2598.8
1515	2759	1470	2678	1425	2597
1514	2757.2	1469	2676.2	1424	2595.2
1513	2755.4	1468	2674.4	1423	2593.4
1512	2753.6	1467	2672.6	1422	2591.6
1511	2751.8	1466	2670.8	1421	2589.8
1510	2750	1465	2669	1420	2588
1509	2748.2	1464	2667.2	1419	2586.2
1508	2746.4	1463	2665.4	1418	2584.4
1507	2744.6	1462	2663.6	1417	2582.6
1506	2742.8	1461	2661.8	1416	2580.8
1505	2741	1460	2660	1415	2579
1504	2739.2	1459	2658.2	1414	2577.2
1503	2737.4	1458	2656.4	1413	2575.4
1502	2735.6	1457	2654.6	1412	2573.6
1501	2733.8	1456	2652.8	1411	2571.8

COMPARISON OF CENTIGRADE AND FAHRENHEIT THERMOMETERS—CONTINUED

Centi- grade	Fahren- heit	Centi- grade	Fahren- heit	Centi- grade	Fahren- heit
1410	2570	1320	2408	870	1598
1409	2568.2	1310	2390	860	1580
1408	2566.4	1300	2372	850	1562
1407	2564.6	1290	2354	840	1544
1406	2562.8	1280	2336	830	1526
1405	2561	1270	2318	820	1508
1404	2559.2	1260	2300	810	1490
1403	2557.4	1250	2282	800	1472
1402	2555.6	1240	2264	790	1454
1401	2553.8	1230	2246	780	1436
1400	2552	1220	2228	770	1418
1399	2550.2	1210	2210	760	1400
1398	2548.4	1200	2192	750	1382
1397	2546.6	1190	2174	740	1364
1396	2544.8	1180	2156	730	1346
1395	2543	1170	2138	720	1328
1394	2541.2	1160	2120	710	1310
1393	2539.4	1150	2102	700	1292
1392	2537.6	1140	2084	690	1274
1391	2535.8	1130	2066	680	1256
1390	2534	1120	2048	670	1238
1389	2532.2	1110	2030	660	1220
1388	2530.4	1100	2012	650	1202
1387	2528.6	1090	1994	640	1184
1386	2526.8	1080	1976	630	1166
1385	2525	1070	1958	620	1148
1384	2523.2	1060	1940	610	1130
1383	2521.4	1050	1922	600	1112
1382	2519.6	1040	1904	590	1094
1381	2517.8	1030	1886	580	1076
1380	2516	1020	1868	570	1058
1379	2514.2	1010	1850	560	1040
1378	2512.4	1000	1832	550	1022
1377	2510.6	990	1814	540	1004
1376	2508.8	980	1796	530	986
1375	2507	970	1778	520	968
1374	2505.2	960	1760	510	950
1373	2503.4	950	1742	500	932
1372	2501.6	940	1724	490	914
1371	2499.8	930	1706	480	896
1370	2498	920	1688	470	878
1360	2480	910	1670	460	860
1350	2462	900	1652	450	842
1340	2444	890	1634	440	824
1330	2426	880	1616	430	806

COMPARISON OF CENTIGRADE AND FAHRENHEIT
THERMOMETERS—CONTINUED

Centi- grade	Fahren- heit	Centi- grade	Fahren- heit	Centi- grade	Fahren- heit
420	788	220	428	20	68
410	770	210	410	10	50
400	752	200	392	0	32
390	734	190	374	1	30.2
380	716	180	356	2	28.4
				3	26.6
370	698	170	338	4	24.8
360	680	160	320	5	23
350	662	150	302	6	21.2
340	644	140	284	7	19.4
330	626	130	266		
				8	17.6
320	608	120	248	9	15.8
310	590	110	230	10	14
300	572	100	212	11	12.2
290	554	90	194	12	10.4
280	536	80	176		
				13	8.6
270	518	70	158	14	6.8
260	500	60	140	15	5
250	482	50	122	16	3.2
240	464	40	104	17	1.4
230	446	30	86		
				18	0.4

Zero in Centigrade is the freezing point of water.

1 degree Centigrade equals $1\frac{4}{5}$ degrees Fahrenheit.

To change degrees Centigrade to Fahrenheit, multiply by 9, divide by 5 and add 32.

To change degrees Fahrenheit to Centigrade, subtract 32, divide by 9 and multiply by 5.

CIRCUMFERENCES AND AREAS OF CIRCLES FROM 1-64 TO 50

Diam.	Circum.	Area	Diam.	Circum.	Area
$\frac{1}{64}$.04909	.000192	4	12.5664	12.5664
$\frac{1}{32}$.09818	.000767	$4\frac{1}{8}$	12.9591	13.3641
$\frac{1}{16}$.19635	.003068	$4\frac{1}{4}$	13.3518	14.1863
$\frac{1}{8}$.3927	.012272	$4\frac{3}{8}$	13.7445	15.033
$\frac{3}{16}$.589	.027612	$4\frac{1}{2}$	14.1372	15.9043
$\frac{1}{4}$.7854	.049087	$4\frac{5}{8}$	14.5299	16.8002
$\frac{5}{16}$.98175	.076699	$4\frac{3}{4}$	14.9226	17.7206
$\frac{3}{8}$	1.1781	.110447	$4\frac{7}{8}$	15.3153	18.6555
$\frac{7}{16}$	1.37445	.15033	5	15.708	19.635
$\frac{1}{2}$	1.5708	.19635	$5\frac{1}{8}$	16.1007	20.629
$\frac{9}{16}$	1.76715	.248505	$5\frac{1}{4}$	16.4934	21.6476
$\frac{5}{8}$	1.9635	.306796	$5\frac{3}{8}$	16.8861	22.6907
$\frac{11}{16}$	2.15985	.371224	$5\frac{1}{2}$	17.2788	23.7583
$\frac{3}{4}$	2.3562	.441787	$5\frac{5}{8}$	17.6715	24.8505
$\frac{13}{16}$	2.55255	.518487	$5\frac{3}{4}$	18.0642	25.9673
$\frac{7}{8}$	2.7489	.601322	$5\frac{7}{8}$	18.4569	27.1086
$\frac{15}{16}$	2.94525	.690292	6	18.8496	28.2744
1	3.1416	.7854	$6\frac{1}{8}$	19.2423	29.4648
$1\frac{1}{8}$	3.5343	.99402	$6\frac{1}{4}$	19.635	30.6797
$1\frac{1}{4}$	3.927	1.2272	$6\frac{3}{8}$	20.0277	31.9191
$1\frac{3}{8}$	4.3197	1.4849	$6\frac{1}{2}$	20.4204	33.1831
$1\frac{1}{2}$	4.7124	1.7671	$6\frac{5}{8}$	20.8131	34.4717
$1\frac{5}{8}$	5.1051	2.0739	$6\frac{3}{4}$	21.2058	35.7848
$1\frac{3}{4}$	5.4978	2.4053	$6\frac{7}{8}$	21.5985	37.1224
$1\frac{7}{8}$	5.8905	2.7612	7	21.9912	38.4846
2	6.2832	3.1416	$7\frac{1}{8}$	22.3839	39.8713
$2\frac{1}{8}$	6.6759	3.5466	$7\frac{1}{4}$	22.7766	41.2826
$2\frac{1}{4}$	7.0686	3.9761	$7\frac{3}{8}$	23.1693	42.7184
$2\frac{3}{8}$	7.4613	4.4301	$7\frac{1}{2}$	23.562	44.1787
$2\frac{1}{2}$	7.854	4.9087	$7\frac{5}{8}$	23.9547	45.6636
$2\frac{5}{8}$	8.2467	5.4119	$7\frac{3}{4}$	24.3474	47.1731
$2\frac{3}{4}$	8.6394	5.9396	$7\frac{7}{8}$	24.7401	48.7071
$2\frac{7}{8}$	9.0321	6.4918	8	25.1328	50.2656
3	9.4248	7.0686	$8\frac{1}{8}$	25.5255	51.8487
$3\frac{1}{8}$	9.8175	7.6699	$8\frac{1}{4}$	25.9182	53.4563
$3\frac{1}{4}$	10.2102	8.2958	$8\frac{3}{8}$	26.3109	55.0884
$3\frac{3}{8}$	10.6029	8.9462	$8\frac{1}{2}$	26.7036	56.7451
$3\frac{1}{2}$	10.9956	9.6211	$8\frac{5}{8}$	27.0963	58.4264
$3\frac{5}{8}$	11.3883	10.3206	$8\frac{3}{4}$	27.489	60.1322
$3\frac{3}{4}$	11.781	11.0447	$8\frac{7}{8}$	27.8817	61.8625
$3\frac{7}{8}$	12.1737	11.7933			

CIRCUMFERENCES AND AREAS OF CIRCLES CONTINUED

Diam.	Circum.	Area	Diam.	Circum.	Area
9	28.2744	63.6174	15	47.124	176.715
9 $\frac{1}{8}$	28.6671	65.3968	15 $\frac{1}{8}$	47.5167	179.673
9 $\frac{1}{4}$	29.0598	67.2008	15 $\frac{1}{4}$	47.9094	182.655
9 $\frac{3}{8}$	29.4525	69.0293	15 $\frac{3}{8}$	48.3021	185.661
9 $\frac{1}{2}$	29.8452	70.8823	15 $\frac{1}{2}$	48.6948	188.692
9 $\frac{5}{8}$	30.2379	72.7599	15 $\frac{5}{8}$	49.0875	191.748
9 $\frac{3}{4}$	30.6306	74.6621	15 $\frac{3}{4}$	49.4802	194.828
9 $\frac{7}{8}$	31.0233	76.5888	15 $\frac{7}{8}$	49.8729	197.933
10	31.416	78.54	16	50.2656	201.062
10 $\frac{1}{8}$	31.8087	80.5158	16 $\frac{1}{8}$	50.6583	204.216
10 $\frac{1}{4}$	32.2014	82.5161	16 $\frac{1}{4}$	51.051	207.395
10 $\frac{3}{8}$	32.5941	84.5409	16 $\frac{3}{8}$	51.4437	210.598
10 $\frac{1}{2}$	32.9868	86.5903	16 $\frac{1}{2}$	51.8364	213.825
10 $\frac{5}{8}$	33.3795	88.6643	16 $\frac{5}{8}$	52.2291	217.077
10 $\frac{3}{4}$	33.7722	90.7628	16 $\frac{3}{4}$	52.6218	220.354
10 $\frac{7}{8}$	34.1649	92.8858	16 $\frac{7}{8}$	53.0145	223.655
11	34.5576	95.0334	17	53.4072	226.981
11 $\frac{1}{8}$	34.9503	97.2055	17 $\frac{1}{8}$	53.7999	230.331
11 $\frac{1}{4}$	35.343	99.4022	17 $\frac{1}{4}$	54.1926	233.906
11 $\frac{3}{8}$	35.7357	101.6234	17 $\frac{3}{8}$	54.5853	237.105
11 $\frac{1}{2}$	36.1284	103.8691	17 $\frac{1}{2}$	54.978	240.529
11 $\frac{5}{8}$	36.5211	106.1394	17 $\frac{5}{8}$	55.3707	243.977
11 $\frac{3}{4}$	36.9138	108.4343	17 $\frac{3}{4}$	55.7634	247.45
11 $\frac{7}{8}$	37.3065	110.7537	17 $\frac{7}{8}$	56.1561	250.948
12	37.6992	113.098	18	56.5488	254.47
12 $\frac{1}{8}$	38.0919	115.466	18 $\frac{1}{8}$	56.9415	258.016
12 $\frac{1}{4}$	38.4846	117.859	18 $\frac{1}{4}$	57.3342	261.587
12 $\frac{3}{8}$	38.8773	120.277	18 $\frac{3}{8}$	57.7269	265.183
12 $\frac{1}{2}$	39.27	122.719	18 $\frac{1}{2}$	58.1196	268.803
12 $\frac{5}{8}$	39.6627	125.185	18 $\frac{5}{8}$	58.5123	272.448
12 $\frac{3}{4}$	40.0554	127.677	18 $\frac{3}{4}$	58.905	276.117
12 $\frac{7}{8}$	40.4481	130.192	18 $\frac{7}{8}$	59.2977	279.811
13	40.8408	132.733	19	59.6904	283.529
13 $\frac{1}{8}$	41.2335	135.297	19 $\frac{1}{8}$	60.0831	287.272
13 $\frac{1}{4}$	41.6262	137.887	19 $\frac{1}{4}$	60.4758	291.04
13 $\frac{3}{8}$	42.0189	140.501	19 $\frac{3}{8}$	60.8685	294.832
13 $\frac{1}{2}$	42.4116	143.139	19 $\frac{1}{2}$	61.2612	298.648
13 $\frac{5}{8}$	42.8043	145.802	19 $\frac{5}{8}$	61.6539	302.489
13 $\frac{3}{4}$	43.197	148.49	19 $\frac{3}{4}$	62.0466	306.355
13 $\frac{7}{8}$	43.5897	151.202	19 $\frac{7}{8}$	62.4393	310.245
14	43.9824	153.938	20	62.832	314.16
14 $\frac{1}{8}$	44.3751	156.7	20 $\frac{1}{8}$	63.2247	318.099
14 $\frac{1}{4}$	44.7678	159.485	20 $\frac{1}{4}$	63.6174	322.063
14 $\frac{3}{8}$	45.1605	162.296	20 $\frac{3}{8}$	64.0101	326.051
14 $\frac{1}{2}$	45.5532	165.13	20 $\frac{1}{2}$	64.4028	330.064
14 $\frac{5}{8}$	45.9459	167.99	20 $\frac{5}{8}$	64.7955	334.102
14 $\frac{3}{4}$	46.3386	170.874	20 $\frac{3}{4}$	65.1882	338.164
14 $\frac{7}{8}$	46.7313	173.782	20 $\frac{7}{8}$	65.5809	342.25

CIRCUMFERENCES AND AREAS OF CIRCLES
CONTINUED

Diam.	Circum.	Area	Diam.	Circum.	Area
21	65.9736	346.361	27	84.8232	572.557
21 $\frac{1}{8}$	66.3663	350.497	27 $\frac{1}{8}$	85.2159	577.87
21 $\frac{1}{4}$	66.759	354.657	27 $\frac{1}{4}$	85.6086	583.209
21 $\frac{3}{8}$	67.1517	358.842	27 $\frac{3}{8}$	86.0013	588.571
21 $\frac{1}{2}$	67.5444	363.051	27 $\frac{1}{2}$	86.394	593.959
21 $\frac{5}{8}$	67.9379	367.285	27 $\frac{5}{8}$	86.7867	599.371
21 $\frac{3}{4}$	68.3298	371.543	27 $\frac{3}{4}$	87.1794	604.807
21 $\frac{7}{8}$	68.7225	375.826	27 $\frac{7}{8}$	87.5729	610.268
22	69.1152	380.134	28	87.9648	615.754
22 $\frac{1}{8}$	69.5079	384.466	28 $\frac{1}{8}$	88.3575	621.264
22 $\frac{1}{4}$	69.9006	388.822	28 $\frac{1}{4}$	88.7502	626.798
22 $\frac{3}{8}$	70.2933	393.203	28 $\frac{3}{8}$	89.1429	632.357
22 $\frac{1}{2}$	70.686	397.609	28 $\frac{1}{2}$	89.5356	637.941
22 $\frac{5}{8}$	71.0787	402.038	28 $\frac{5}{8}$	89.9283	643.549
22 $\frac{3}{4}$	71.4714	406.494	28 $\frac{3}{4}$	90.321	649.182
22 $\frac{7}{8}$	71.8641	410.973	28 $\frac{7}{8}$	90.7137	654.84
23	72.2568	415.477	29	91.1064	660.521
23 $\frac{1}{8}$	72.6495	420.004	29 $\frac{1}{8}$	91.4991	666.228
23 $\frac{1}{4}$	73.0422	424.558	29 $\frac{1}{4}$	91.8918	671.959
23 $\frac{3}{8}$	73.4349	429.135	29 $\frac{3}{8}$	92.2845	677.714
23 $\frac{1}{2}$	73.8276	433.737	29 $\frac{1}{2}$	92.6772	683.494
23 $\frac{5}{8}$	74.2203	438.364	29 $\frac{5}{8}$	93.0699	689.299
23 $\frac{3}{4}$	74.613	443.015	29 $\frac{3}{4}$	93.4626	695.128
23 $\frac{7}{8}$	75.0057	447.69	29 $\frac{7}{8}$	93.8553	700.982
24	75.3984	452.39	30	94.248	706.86
24 $\frac{1}{8}$	75.7911	457.115	30 $\frac{1}{8}$	94.6407	712.763
24 $\frac{1}{4}$	76.1838	461.864	30 $\frac{1}{4}$	95.0334	718.69
24 $\frac{3}{8}$	76.5765	466.638	30 $\frac{3}{8}$	95.4261	724.642
24 $\frac{1}{2}$	76.9692	471.436	30 $\frac{1}{2}$	95.8188	730.618
24 $\frac{5}{8}$	77.3619	476.259	30 $\frac{5}{8}$	96.2115	736.619
24 $\frac{3}{4}$	77.7546	481.107	30 $\frac{3}{4}$	96.6042	742.645
24 $\frac{7}{8}$	78.1473	485.979	30 $\frac{7}{8}$	96.9969	748.695
25	78.54	490.875	31	97.3896	754.769
25 $\frac{1}{8}$	78.9327	495.796	31 $\frac{1}{8}$	97.7823	760.869
25 $\frac{1}{4}$	79.3254	500.742	31 $\frac{1}{4}$	98.175	766.992
25 $\frac{3}{8}$	79.7181	505.712	31 $\frac{3}{8}$	98.5677	773.14
25 $\frac{1}{2}$	80.1108	510.706	31 $\frac{1}{2}$	98.9604	779.313
25 $\frac{5}{8}$	80.5035	515.726	31 $\frac{5}{8}$	99.3531	785.51
25 $\frac{3}{4}$	80.8962	520.769	31 $\frac{3}{4}$	99.7458	791.732
25 $\frac{7}{8}$	81.4889	525.838	31 $\frac{7}{8}$	100.1385	797.979
26	81.6816	530.93	32	100.5312	804.25
26 $\frac{1}{8}$	82.0743	536.048	32 $\frac{1}{8}$	100.9239	810.545
26 $\frac{1}{4}$	82.476	541.19	32 $\frac{1}{4}$	101.3166	816.865
26 $\frac{3}{8}$	82.8597	546.356	32 $\frac{3}{8}$	101.7093	823.21
26 $\frac{1}{2}$	83.2524	551.547	32 $\frac{1}{2}$	102.102	829.579
26 $\frac{5}{8}$	83.6451	556.763	32 $\frac{5}{8}$	102.4947	835.972
26 $\frac{3}{4}$	84.0378	562.003	32 $\frac{3}{4}$	102.8874	842.391
26 $\frac{7}{8}$	84.4305	567.267	32 $\frac{7}{8}$	103.2801	848.833

CIRCUMFERENCES AND AREAS OF CIRCLES

CONTINUED

Diam.	Circum.	Area	Diam.	Circum.	Area
33	103.673	855.301	39	122.522	1194.593
33 $\frac{1}{8}$	104.065	861.792	39 $\frac{1}{8}$	122.915	1202.263
33 $\frac{1}{4}$	104.458	868.309	39 $\frac{1}{4}$	123.308	1209.958
33 $\frac{3}{8}$	104.851	874.85	39 $\frac{3}{8}$	123.7	1217.677
33 $\frac{1}{2}$	105.344	881.415	39 $\frac{1}{2}$	124.093	1225.42
33 $\frac{5}{8}$	105.636	888.005	39 $\frac{5}{8}$	124.486	1233.188
33 $\frac{3}{4}$	106.029	894.62	39 $\frac{3}{4}$	124.879	1240.981
33 $\frac{7}{8}$	106.422	901.259	39 $\frac{7}{8}$	125.271	1248.798
34	106.814	907.922	40	125.664	1256.64
34 $\frac{1}{8}$	107.207	914.611	40 $\frac{1}{8}$	126.057	1264.51
34 $\frac{1}{4}$	107.6	921.323	40 $\frac{1}{4}$	126.449	1272.4
34 $\frac{3}{8}$	107.992	928.061	40 $\frac{3}{8}$	126.842	1280.31
34 $\frac{1}{2}$	108.385	934.822	40 $\frac{1}{2}$	127.235	1288.25
34 $\frac{5}{8}$	108.778	941.609	40 $\frac{5}{8}$	127.627	1296.22
34 $\frac{3}{4}$	109.171	948.42	40 $\frac{3}{4}$	128.02	1304.21
34 $\frac{7}{8}$	109.563	955.255	40 $\frac{7}{8}$	128.413	1312.22
35	109.956	962.115	41	128.806	1320.26
35 $\frac{1}{8}$	110.349	969.	41 $\frac{1}{8}$	129.198	1328.32
35 $\frac{1}{4}$	110.741	975.909	41 $\frac{1}{4}$	129.591	1336.41
35 $\frac{3}{8}$	111.134	982.842	41 $\frac{3}{8}$	129.984	1344.52
35 $\frac{1}{2}$	111.527	989.8	41 $\frac{1}{2}$	130.376	1352.66
35 $\frac{5}{8}$	111.919	996.783	41 $\frac{5}{8}$	130.769	1360.82
35 $\frac{3}{4}$	112.312	1003.79	41 $\frac{3}{4}$	131.162	1369.
35 $\frac{7}{8}$	112.705	1010.822	41 $\frac{7}{8}$	131.554	1377.21
36	113.098	1017.878	42	131.947	1385.45
36 $\frac{1}{8}$	113.49	1024.96	42 $\frac{1}{8}$	132.34	1393.7
36 $\frac{1}{4}$	113.883	1032.065	42 $\frac{1}{4}$	132.733	1401.99
36 $\frac{3}{8}$	114.276	1039.195	42 $\frac{3}{8}$	133.125	1410.3
36 $\frac{1}{2}$	114.668	1046.349	42 $\frac{1}{2}$	133.518	1418.63
36 $\frac{5}{8}$	115.061	1053.528	42 $\frac{5}{8}$	133.911	1426.99
36 $\frac{3}{4}$	115.454	1060.732	42 $\frac{3}{4}$	134.303	1435.37
36 $\frac{7}{8}$	115.846	1067.96	42 $\frac{7}{8}$	134.696	1443.77
37	116.239	1075.213	43	135.089	1452.2
37 $\frac{1}{8}$	116.632	1082.49	43 $\frac{1}{8}$	135.481	1460.66
37 $\frac{1}{4}$	117.025	1089.792	43 $\frac{1}{4}$	135.874	1469.14
37 $\frac{3}{8}$	117.417	1097.118	43 $\frac{3}{8}$	136.267	1477.64
37 $\frac{1}{2}$	117.81	1104.469	43 $\frac{1}{2}$	136.66	1486.17
37 $\frac{5}{8}$	118.203	1111.844	43 $\frac{5}{8}$	137.052	1494.73
37 $\frac{3}{4}$	118.595	1119.244	43 $\frac{3}{4}$	137.445	1503.3
37 $\frac{7}{8}$	118.988	1126.669	43 $\frac{7}{8}$	137.838	1511.91
38	119.381	1134.118	44	138.23	1520.53
38 $\frac{1}{8}$	119.773	1141.591	44 $\frac{1}{8}$	138.623	1529.19
38 $\frac{1}{4}$	120.166	1149.089	44 $\frac{1}{4}$	139.016	1537.86
38 $\frac{3}{8}$	120.559	1156.612	44 $\frac{3}{8}$	139.408	1546.56
38 $\frac{1}{2}$	120.952	1164.159	44 $\frac{1}{2}$	139.801	1555.29
38 $\frac{5}{8}$	121.344	1171.731	44 $\frac{5}{8}$	140.194	1564.04
38 $\frac{3}{4}$	121.737	1179.327	44 $\frac{3}{4}$	140.587	1572.81
38 $\frac{7}{8}$	122.13	1186.948	44 $\frac{7}{8}$	140.979	1581.61

CIRCUMFERENCES AND AREAS OF CIRCLES
CONTINUED

Diam.	Circum.	Area	Diam.	Circum.	Area
45	141.372	1590.43	48	150.797	1809.56
45 $\frac{1}{8}$	141.765	1599.28	48 $\frac{1}{8}$	151.189	1819.
45 $\frac{1}{4}$	142.157	1608.16	48 $\frac{1}{4}$	151.582	1828.46
45 $\frac{3}{8}$	142.55	1617.05	48 $\frac{3}{8}$	151.975	1837.95
45 $\frac{1}{2}$	142.943	1625.97	48 $\frac{1}{2}$	152.368	1847.46
45 $\frac{5}{8}$	143.335	1634.92	48 $\frac{5}{8}$	152.76	1856.99
45 $\frac{3}{4}$	143.728	1643.89	48 $\frac{3}{4}$	153.153	1866.55
45 $\frac{7}{8}$	144.121	1652.89	48 $\frac{7}{8}$	153.546	1876.14
46	144.514	1661.91	49	153.938	1885.75
46 $\frac{1}{8}$	144.906	1670.95	49 $\frac{1}{8}$	154.331	1895.38
46 $\frac{1}{4}$	145.299	1680.02	49 $\frac{1}{4}$	154.724	1905.04
46 $\frac{3}{8}$	145.692	1689.11	49 $\frac{3}{8}$	155.116	1914.72
46 $\frac{1}{2}$	146.084	1698.23	49 $\frac{1}{2}$	155.509	1924.43
46 $\frac{5}{8}$	146.477	1707.37	49 $\frac{5}{8}$	155.902	1934.16
46 $\frac{3}{4}$	146.87	1716.54	49 $\frac{3}{4}$	156.295	1943.91
46 $\frac{7}{8}$	147.262	1725.73	49 $\frac{7}{8}$	156.687	1953.69
47	147.655	1734.95	50	157.08	1963.5
47 $\frac{1}{8}$	148.048	1744.19			
47 $\frac{1}{4}$	148.441	1753.45			
47 $\frac{3}{8}$	148.833	1762.74			
47 $\frac{1}{2}$	149.226	1772.06			
47 $\frac{5}{8}$	149.619	1781.4			
47 $\frac{3}{4}$	150.011	1790.76			
47 $\frac{7}{8}$	150.404	1800.15			

TABLE FOR CIRCLE BRICK

FOR LENGTH OF CHORD MULTIPLY SINE BY DIAMETER

No. to Circle	Sine of Half Angle	Diameter for 9" Chord	No. to Circle	Sine of Half Angle	Diameter for 9" Chord
5	.58779	15.311"	28	.11196	80.385"
6	.50000	18.000"	29	.10811	83.248"
7	.43386	20.740"	30	.10453	86.099"
8	.38268	23.518"	31	.10044	89.605"
9	.34202	26.314"	32	.09802	91.818"
10	.30902	29.124"	33	.09507	94.667"
11	.28173	31.945"	34	.09225	97.560"
12	.25882	34.773"	35	.08965	100.390"
13	.23932	37.606"	36	.08716	103.257"
14	.22251	40.447"	37	.08481	106.119"
15	.20791	43.287"	38	.08258	108.985"
16	.19509	46.132"	39	.08046	111.856"
17	.18428	48.833"	40	.07846	114.708"
18	.17365	51.828"	41	.07655	117.570"
19	.16459	54.681"	42	.07472	120.449"
20	.15643	57.533"	43	.07300	123.287"
21	.14904	60.386"	44	.07136	127.102"
22	.14230	63.246"	45	.06976	129.014"
23	.13617	66.094"	46	.06825	131.868"
24	.13053	68.949"	47	.06679	134.750"
25	.12534	71.805"	48	.06540	137.614"
26	.12054	74.664"	49	.06407	140.471"
27	.11609	77.526"	50	.06279	143.334"

WEIGHTS OF VARIOUS MATERIALS

Material	Average Per Cu. Ft. Pounds
BRICK	
Common red	100
Fire clay	150
Silica	128
Chrome	175
Magnesia as brick or fused in furnace	160
CEMENT	
Portland	78
Hydraulic	60
FINE GROUND CLAYS, SILICA CEMENT, ETC.	
Fire clay	85
Silica cement	75
Magnesia cement	127
Chrome cement	135
Grain magnesite (as shipped)	112
COAL AND COKE	
Anthracite	60
Bituminous	49
Charcoal	18.5
Coke	26.3
CONCRETE	
Cement, fine	137
Rubble, coarse	119
EARTH	
Loam, dry, loose	76
Loam, packed	95
Loam, soft, loose mud	108
Loam, dense mud	125
GLASS	
Common window	157
Plate	172
Flint	192
Floor or skylight	158
GRAIN	
Corn	45
Oats	24
Wheat	48
LIME	
Quick, loose lumps	53
Quick, fine	75
Stone, large rocks	168
Stone, irregular lumps	96
MASONRY	
Granite or limestone	165
Mortar, rubble	154
Dry	138
Sandstone, dressed	144
METALS	
Aluminum	166
Brass, cast	524
Bronze	534
Copper, cast	537
Copper, rolled or wire	555
Iron, cast	450
Iron, wrought	482

WEIGHTS OF VARIOUS MATERIALS CONTINUED

Material	Average Per Cu. Ft. Pounds
METALS—Continued	
Lead, cast	708
Lead, rolled	711
Steel, cast	490
Steel, rolled	495
Tin, cast	459
Zinc, cast	438
OILS	
Engine	55
Crude	48
Petroleum	55
Gasoline	43
ROCK	
Chalk	145
Granite	165
Gypsum	143
Sandstone	144
Pumice stone	57
Quartz	165
Salt, coarse	45
Salt, fine	49
Shales	162
Slate, American	175
SAND	
Dry and loose	100
Dry and packed	110
Wet and packed	130
Gravel packed	118
WATER	
Water as ice	58.7
Water at 32 degrees Fahrenheit	62.4
Water at 212 degrees Fahrenheit	59.6
WOODS, DRY	
Apple	48
Beech	43
Birch	45
Cedar, American	35
Chestnut	41
Ebony	76
Elm	35
Hemlock	25
Hickory	53
Ironwood	114
Mahogany	35 to 53
Maple	49
Oak, live	59
Oak, white	50
Pine, white	25
Pine, yellow northern	34
Pine, yellow southern	45
Spruce	25
Walnut	35

DECIMALS OF AN INCH FOR EACH 1-64TH

1-64	.015625	33-64	.515625
1-32	.03125	17-32	.53125
3-64	.046875	35-64	.546875
1-16	.0625	9-16	.5625
5-64	.078125	37-64	.578125
3-32	.09375	19-32	.59375
7-64	.109375	39-64	.609375
1-8	.125	5-8	.625
9-64	.140625	41-64	.640625
5-32	.15625	21-32	.65625
11-64	.171875	43-64	.671875
3-16	.1875	11-16	.6875
13-64	.203125	45-64	.703125
7-32	.21875	23-32	.71875
15-64	.234375	47-64	.734375
1-4	.250	3-4	.75
17-64	.265625	49-64	.765625
9-32	.28125	25-32	.78125
19-64	.296875	51-64	.796875
5-16	.3125	13-16	.8125
21-64	.328125	53-64	.828125
11-32	.34375	27-32	.84375
23-64	.359375	55-64	.859375
3-8	.375	7-8	.875
25-64	.390625	57-64	.890625
13-32	.40625	29-32	.90625
27-64	.421875	59-64	.921875
7-16	.4375	15-16	.9375
29-64	.453125	61-64	.953125
15-32	.46875	31-32	.96875
31-64	.484375	63-64	.984375
1-2	.500	1	1.

INDEX

	Page
GENERAL INTRODUCTION	3, 4

STANDARD SHAPES, ILLUSTRATIONS OF

9-INCH SERIES—FIRE CLAY AND SILICA	26-31
Blast furnace, 9-inch and 13½-inch shapes	38, 39
Blast furnace, bottom blocks	61
Blast furnace, gas flue arch	39
Bridge blocks	32
Cement kiln shapes	45, 46, 47
Chrome shapes	51
Coke oven shapes	40, 41, 79, 80, 82, 83, 84, 85, 86, 87
Converter bottom blocks	49
Cupola blocks	31, 32
Engine tile	50
Glass tank shapes, silica, 12-inch and 13½-inch, 2½-inch series	35, 36
Glass tank shapes, silica, 12-inch, 3-inch series	34, 35
Hot blast stoves, hexagon shapes	37
Hot blast stoves	62-77
Magnesia shapes	52, 53
Malleable furnace shapes	33
Pottery kiln shapes	33
Recuperator flue tile	48
Siemens crucible furnace	42, 43, 44, 97, 99
Tile, regenerator	44
Tile, stock hole	32

HARBISON-WALKER REFRACTORIES COMPANY'S WORKS, PRODUCTS, BRANDS AND SHAPES

HARBISON-WALKER COMPANY

Fire clay, list of standard shapes and brands	5, 6
Silica, list of standard shapes and brands	7

EAST CHICAGO WORKS—ANNOUNCEMENT

W-Star silica, list of standard shapes	9
--------------------------------------------------	---

MAGNESIA AND CHROME WORKS

Magnesite and chrome ore	10-14
Magnesia brick	11
Magnesia brick, list of standard shapes	12
Chrome ore	14
Chrome brick	11
Chrome brick, list of standard shapes	13
Chrome brick, list of standard shapes	14

CLEARFIELD FIRE BRICK WORKS

Fire clay, list of standard shapes	18
Fire clay, list of standard shapes	19

INDEX—CONTINUED

	Page
CLINTON COUNTY FIRE BRICK WORKS	24
Fire clay, list of standard shapes	25
PHILIPSBURG FIRE BRICK WORKS	20
Fire clay, list of standard shapes	20
PORTSMOUTH HARBISON-WALKER WORKS.	15
Fire clay, list of standard shapes and brands	16, 17
REESE CLAY AND SILICA BRICK WORKS	21
Fire clay, list of standard shapes	22
Silica, list of standard shapes	23
VARIOUS FURNACES, ILLUSTRATIONS OF AND INFORMATION ON	
BLAST FURNACES	38, 39, 54-61
9-inch and 13½-inch lining brick	38, 39
Bottom blocks	55, 61
Records	56-57
Cut of furnace	60
HOT BLAST STOVES	37, 62-77
Hexagon shapes	37
Cuts of stoves in general use	64-77
BOILER BRICK	108-119
COKE OVEN BRICK	78-88
Standard shapes	40, 41
Bee-hive oven, cut of	79
By-product ovens, cuts of various	81-88
Long or Belgian oven, cut of	80
CEMENT KILN, STANDARD ROTARY	107
COPPER CONVERTER	104
COPPER SMELTING, REVERBERATORY FURNACE	102-104
CUPOLA	91
GLASS TANK, PRODUCER GAS	106
GAS RETORT	120, 121
HEATING FURNACE, COAL FIRED	95
HEATING FURNACE, GAS FIRED	100
LIME KILN	105
MALLEABLE FURNACE	89, 90
OPEN HEARTH FURNACE	92

INDEX—CONTINUED

	Page
PUDDLING FURNACE	101
SIEMENS CRUCIBLE FURNACE	96, 97
SIEMENS CRUCIBLE FURNACE, OUR PLAN	98, 99
SOAKING PIT	93, 94


TABLES AND MISCELLANEOUS DATA

GENERAL INFORMATION ABOUT FIRE BRICK	122
BRICK TABLES	123-140
Arch, 9-inch	124
Arch Magnesite	138
Blast furnace, bottom blocks	133
Blast furnace, gas flue arch	132
Circle, 9-inch	136
Cupola blocks	132
Key, 9-inch	125, 126, 127
Key, 9 x 6-inch	130, 131
Key, 13½-inch	128, 129, 130
Key, magnesite and chrome	137
Wedge, 9-inch	123
Wedge, silica, 12-inch, 2½-inch series	134
Wedge, silica, 12-inch, 3-inch series	135
Wedge, magnesite	139
Wedge, chrome	140

VARIOUS TABLES

Circle brick, table for determining length of chord	154
Circles, circumference and area of	149-153
Decimals of an inch for each $\frac{1}{64}$ th	157
Segger cones, fusing point of	143
Temperatures, Centigrade and Fahrenheit	144-148
Temperatures, melting point of various materials.	141
Temperatures, table for determining by color	142
Temperatures, iron and steel in various stages of manu- facture	141-142
Weights of various materials	155, 156



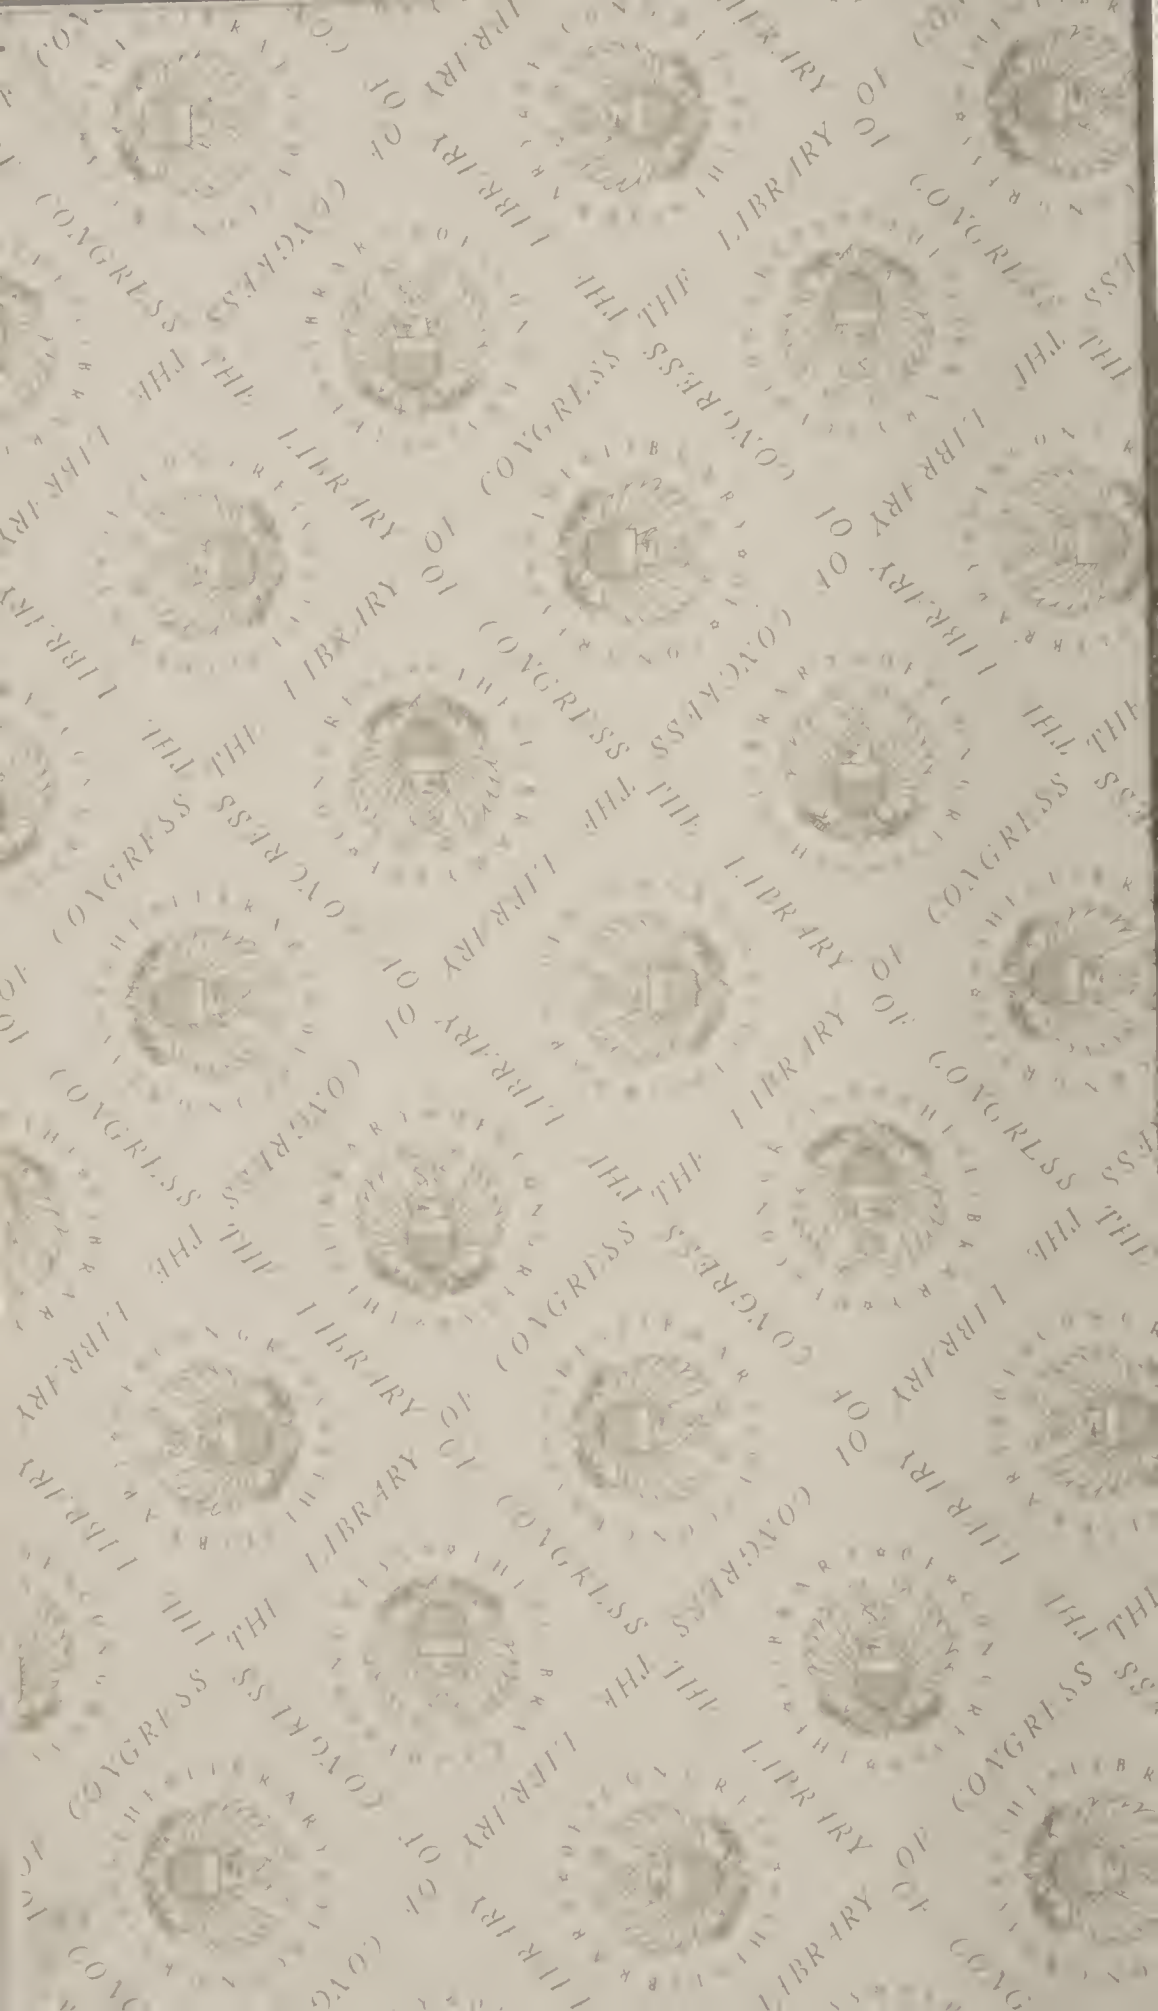



LIBRARY OF CONGRESS



0 002 965 271 5